



Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 36" Standard Series Charbroiler, 3 Burners, in Stainless Steel

BDECTC-36/NG



This Black Diamond Charbroiler is engineered for commercial kitchens, providing reliable performance with its 90,000 BTU output. Built with stainless steel and cast iron, it ensures durability and longevity. Featuring three burners, it's ideal for high-demand environments like steakhouses and barbecue restaurants. Equipped with manual ignition and control, this charbroiler offers precise cooking. Cleaning is simplified with a removable oil tray and adjustable legs.

FEATURES AND CONSTRUCTION

- Made of durable stainless steel and cast iron for long-lasting use
- Delivers a powerful 90,000 BTUs for efficient cooking
- Features 3 burners for versatile cooking options
- Compact design perfect for countertop placement
- Equipped with 4 adjustable legs for stability
- Includes coupling adaptor and 3/4 inch gas connection for natural gas
- Manual ignition and control type for straightforward operation
- Wide temperature range to suit various cooking needs
- Includes a drip tray for easy cleanup
- Field convertible to liquid propane for flexible use

INCLUDED COMPONENTS

- (4) Adjustable Legs
- (3) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray
- (1) Raised Grill Plate

3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment for details at 1-877-672-7740







BLACK DIAMOND® Black Diamond 36" Standard Series Charbroiler, NG

BDECTC-36/NG

FRONT

SIDE

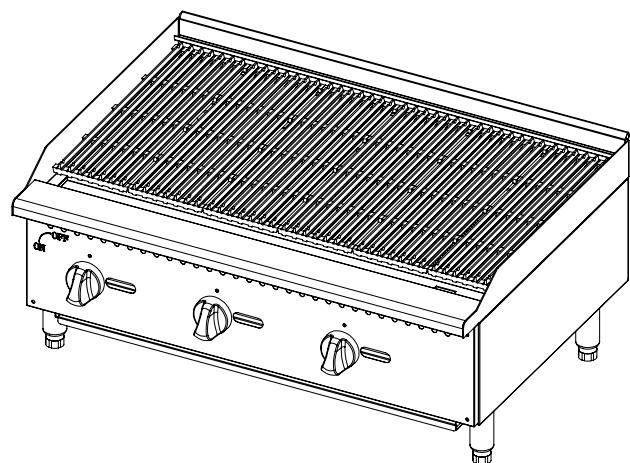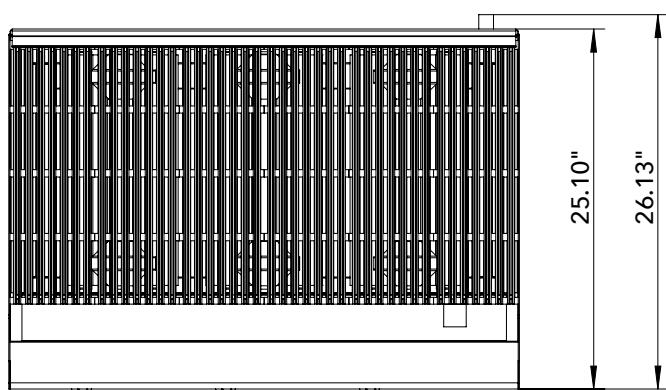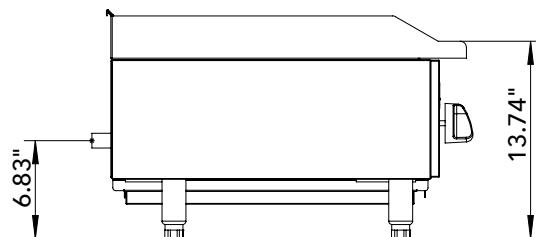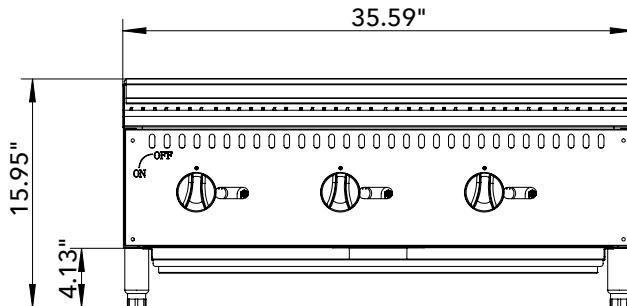

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	90000	3	Cast Iron	1	26.13" x 35.59" x 15.95"	143.3	189.6

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.