

LOW PROFILE BAGGING ICE DISPENSERS

- ♦ **LP SERIES** - DESIGNED FOR HEAVY DUTY USE BY VOLUME FEEDERS, HOTELS, VENDING OPERATIONS, INSTITUTIONS AND HOSPITALS WHERE HEIGHT IS CRITICAL.
- ♦ **AUTOMATIC** - ICE IS DISPENSED BY FOOT PEDAL CONTROL (AUTOMATIC TIMER CONTROL OPTIONAL).
- ♦ **DELIVERY SYSTEM** - STAINLESS STEEL DELIVERY AUGER DRIVEN BY A HEAVY DUTY GEAR MOTOR THROUGH A ROLLER CHAIN DRIVE SYSTEM.
- ♦ **AGITATION SYSTEM** - PUSHBUTTON ACTIVATED ALL STAINLESS STEEL AGITATORS (4) ARE POWERED BY TWO SEPERATE GEAR MOTORS(UPPER AND LOWER) THROUGH A CONNECTING ROLLER CHAIN DRIVE SYSTEM.
- ♦ **SERVICEABILITY** - THE ENTIRE UNIT IS SERVICEABLE FROM THE FRONT AND SIDES. ALL SHAFTS CAN BE REMOVED FROM THE FRONT. MINIMIZES REAR CLEARANCE SPACE.

GENERAL SPECIFICATIONS

INTERIOR.....WELDED ANGLE IRON FRAME. STAINLESS STEEL, TYPE 304,
TANK, FULLY WELDED SEAMS.

EXTERIOR.....POLISHED STAINLESS STEEL. ALUMINUM BACK and
GALVANIZED STEEL BOTTOM (STAINLESS STEEL OPTIONAL).
TWO SECTION BODY OPTIONAL.

INSULATION.....2" EXPANDED POLYSTYRENE.


DRAIN.....1" MPT, CENTER BOTTOM.

LEGS.....6" ADJUSTABLE with STAINLESS STEEL FEET.

DELIVERY SYSTEM.....SPIRAL AUGER TYPE, STAINLESS STEEL CONSTRUCTION.

ELECTRICAL.....208-230v/60hz/1ph (OTHER VOLTAGES AVAILABLE)
(3) 3/4 HP GEAR MOTOR, 5.5 AMPS EACH.

OPTIONS.....BAG BLOWER, PORTION TIMER, BAG TAPER, COIN OR
TOKEN MECHANISM.

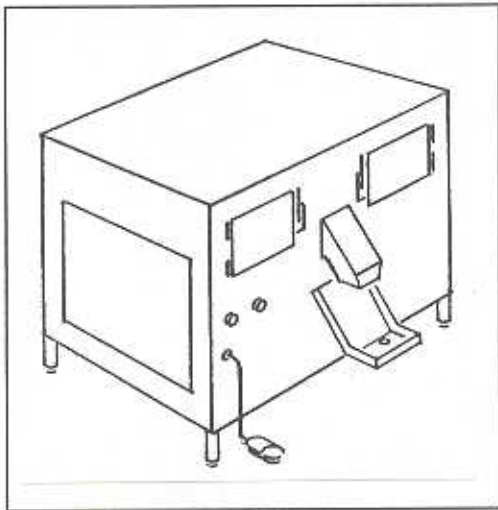

<u>MODEL NUMBER</u>	<u>APPROX STORAGE (lbs.)</u>	<u>WIDTH (in.)</u>	<u>DEPTH* (in.)</u>	<u>HEIGHT (in.)</u>
LP-2000	2000	84¼	56	60
LP-3000S	2500	84¼	48	72
LP-3000	2800	84¼	56	72

Height includes 6" legs.

*For overall depth, add 12" for front nozzle.
Allow 12" each side of unit for servicing.

MGR EQUIPMENT CORP.

22 Gates Avenue, Inwood, New York 11096-1697

Phone: (516) 239-3030
Fax: (516) 239-3602
Toll Free: (800) 486-4647