



Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_  
Qty: \_\_\_\_\_

## Maxx Cold V-Series 3 Solid Door Reach-In Refrigerator, Bottom Mount

### MVR-72FDHC



Ideal for use in restaurants, cafes, bakeries, catering businesses and more, the Maxx Cold V-Series 3 Solid Door Reach-In Refrigerator is a smart investment. Offering ample storage space for perishable goods, ingredients, prepared foods and beverages, this commercial reach-in refrigerator measures 81"W and has a storage capacity of 65 cubic feet. Built to withstand the demands of a commercial kitchen, it is constructed of an easy-to-clean stainless steel exterior and painted aluminum interior.

### FEATURES AND CONSTRUCTION

- Reach-in refrigerator with three self-closing, locking solid doors with easy-to-grip recessed handles
- Constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior
- Includes 9 adjustable heavy-duty wire shelves
- 65 cu ft storage capacity
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters for easy mobility in your commercial kitchen
- Automatic defrost system
- Temperature range 34°F to 40°F (1°C to 4°C)
- LED temperature display is easy to read
- Automatic defrost system
- Automatic interior lighting

### ELECTRIC

115 / 60Hz / 1Ph  
Cord Length (Inches): 98.5"  
Plug Type: NEMA 5-15P  
Cord set included

NEMA 5-15P



### 3RD PARTY APPROVALS



Intertek



Intertek

### WARRANTY (USA / CANADA)

6 Months Parts and Labor, 1 Year Compressor Warranty

For more information, contact:  
TechnicalServices@TheLegacyCompanies.com  
or 877.368.2797



### NOMINAL STORAGE CAPACITY

Cubic Feet: 65.01 cu. ft.

### TEMPERATURE


- Holding Temperature (Fahrenheit): 34° - 40°
- Efficient forced-air refrigeration system

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity



# Maxx Cold V-Series 3 Solid Door Reach-In Refrigerator, Bottom Mount

MVR-72FDHC

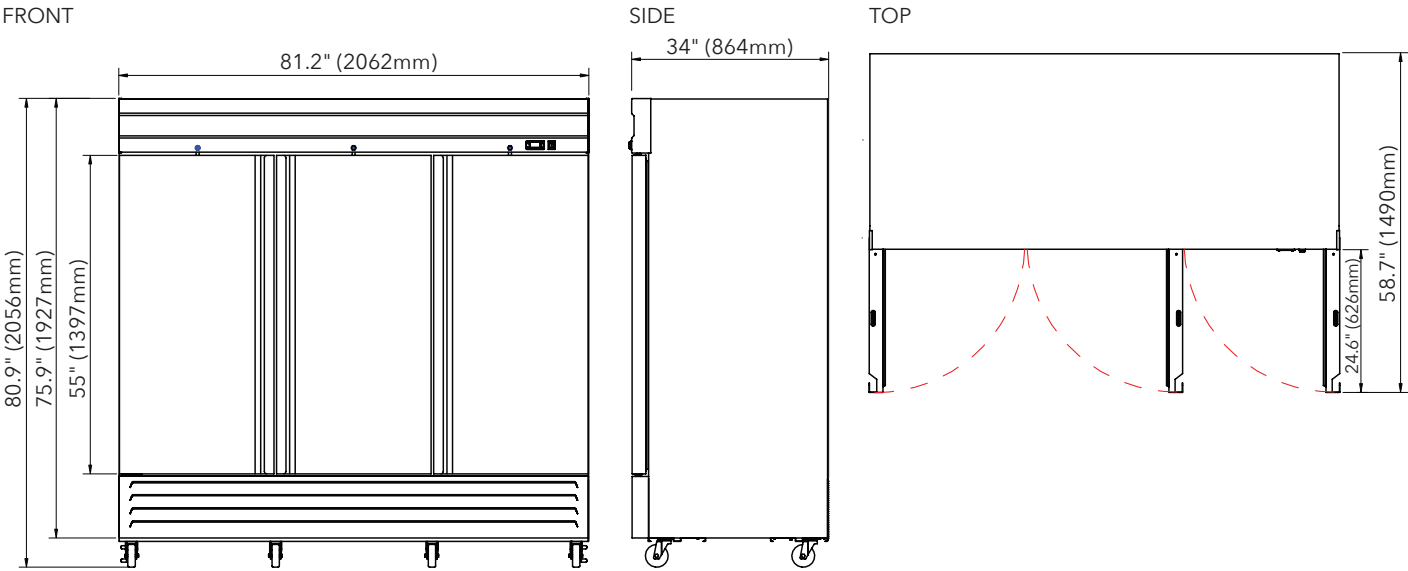

## Reach-In

Doors	Shelves	Amps	Refrigerant	Dimensions	Item Weight lbs	Shipping Weight lbs
3	9	2.2A	R290 3 oz	34.00" x 81.20" x 80.90"	524.0	562.0

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.