




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

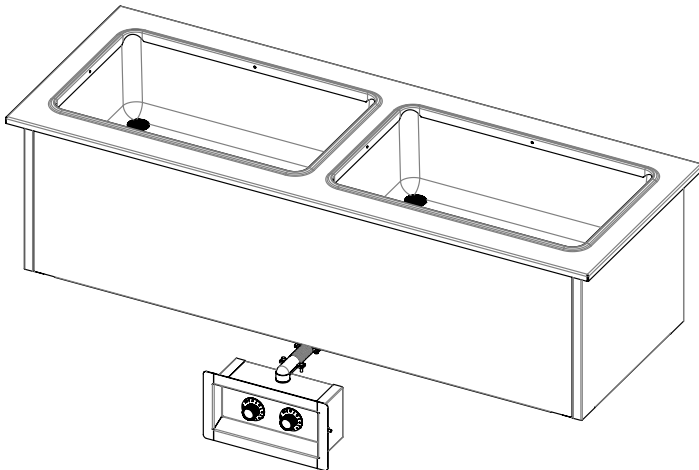

DI-2ESL-SW

OPTIONS:

- ☐ Hug Edge Top
- ☐ 3 phase Wiring (except **DI-1ESL-SW**)
- ☐ 208V 900W Elements
- ☐ Individual valves
- ☐ Mainifold drains
- ☐ Master valve
- ☐ Designer Foodshields
- ☐ Telescope covers
- ☐ Adapter Plates
- ☐ Adapter Bars

AGENCY LISTING:



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

Specification subject to change



WARNING For CA residents: go to
www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins- Slimline

Hot Food - Electric - Sealed Well

- ☐ **DI-1ESL-SW** 24 1/4" L x 17 1/4" W x 12 3/4" H
- ☐ **DI-2ESL-SW** 46 1/4" L x 17 1/4" W x 12 3/4" H
- ☐ **DI-3ESL-SW** 68 1/4" L x 17 1/4" W x 12 3/4" H

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- 6-1/2" deep stainless steel liner, wet or dry operation
- Fully Insulated Sealed Element in each compartment
- 750W and 1200W
- Individual open drains

CONTROL PANEL:

- Stainless steel face plate, plastic knobs
- UL approved
- Infinite switch controls in remote box

EXTERIOR HOUSING

- Heavy gauge paint grip steel

DROP-IN - SLIMLINE - HOT FOOD - ELECTRIC - SEALED WELLS

Catalog No. ADI-SLIMELECHFSW



A.I.A. File No. 35-C-13

DROP-INS - SLIMLINE HOT FOOD ELECTRIC - SEALED WELL


A.I.A. File No. 35-C-13

Catalog No. ADI-SLIMELECHFSW

DROP-IN - SLIMLINE - HOT FOOD - ELECTRIC - SEALED WELLS

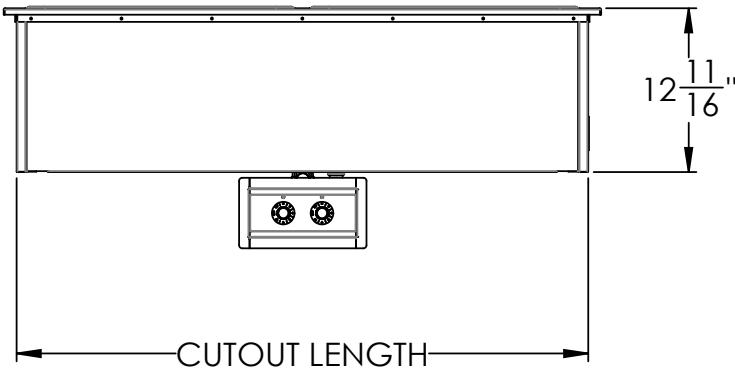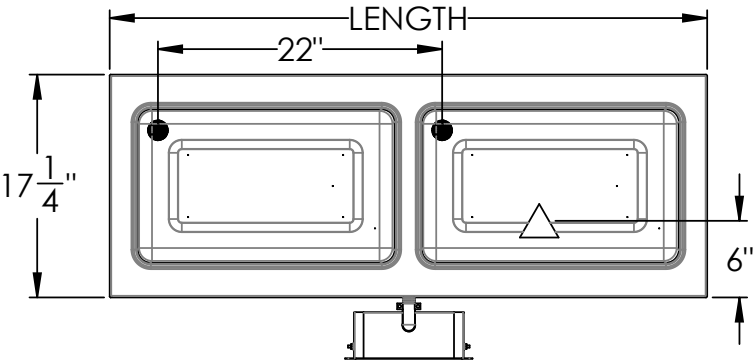

LEGEND
▲ - ELECTRICAL CONNECTION
● - DRAIN CONNECTION
Allow 4" gap between controls and unit

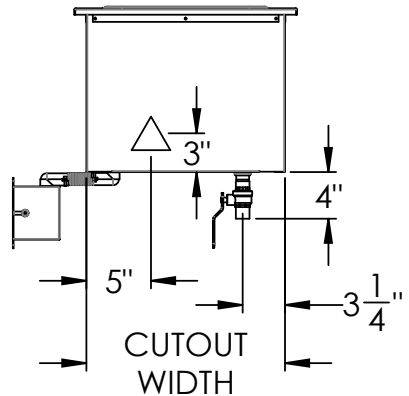

DIMENSIONS:

FREIGHT CLASS: 100

Model	Length		Width		Height		Cutout Length		Cutout Width		Cube ft. crated	Weight	
	in.	cm	in	cm	in	cm	in	cm	in	cm		lbs	kg
DI-1ESL-SW	24.25	61.6	17 1/4	43.8	12.75	32.4	23	58.4	16	40.6	7.7	80	36.4
DI-2ESL-SW	46.25	117.5	17 1/4	43.8	12.75	32.4	45	114.3	16	40.6	13.3	135	61.4
DI-3ESL-SW	68.25	173.1	17 1/4	43.8	12.75	32.4	67	170.2	16	40.6	19.0	185	84.1
REMOTE CONTROL CUTOUT IS 9" X 4.375"													

ELECTRICAL SPECIFICATIONS:

Model	120V 750W			208V 750W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
DI-1ESL-SW	750	6.3	5-15	750	3.6	6-20	750	3.1	6-20
DI-2ESL-SW	1500	12.5	5-15	1500	7.2	6-20	1500	6.3	6-20
DI-3ESL-SW	2250	18.8	L5-30	2250	10.8	6-20	2250	9.4	6-20

Model	120V 1200W			208V 1200W			240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
DI-1ESL-SW	1200	10	5-15	1200	5.8	6-20	1200	5	6-20
DI-2ESL-SW	2400	20	L5-30	2400	11.5	6-20	2400	10	6-20
DI-3ESL-SW	3600	30	5-50	3600	17.3	L6-30	3600	15	6-20

(Consult factory for 3-phase electrical requirements and other options)



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com