



Project _____ Item# _____

UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU REFRIGERATORS-REMOTE



MODEL RTR-75-SS-2G-2G-X
SHOWN WITH OPTIONAL GLASS DOORS

MODEL NO.	DESCRIPTION
☐ RIR-30-SS-1S-X	30" Wide, One Door
☐ RIR-375-SS-1S-X	37.5" Wide, One Extra Wide Door
☐ RIR-60-SS-2S-X	60" Wide, Two Doors
☐ RIR-75-SS-2S-X	75" Wide, Two Extra Wide Doors
☐ RIR-90-SS-3S-X	90" Wide, Three Doors

OPTIONS	MODEL NO. MODIFICATION
☐ Glass Doors	Change "S" to "G"
☐ Roll-Thru	Change "RI" to "RT"

STANDARD FEATURES

- Stainless steel front and sides
- Stainless steel interior
- Heavy-gauge, reinforced stainless steel floor
- Standard width models for end-loading racks
- Extra-wide models for side-loading racks and dollies
- Self-closing door hinges with stay-open feature at 120 degrees (standard door hinging: Single door units hinged on left; Two door units, left door hinged on left, right door hinged on right; Three door units, left door hinged on left, center and right doors hinged on right. Other configurations available)
- Full-length recessed Unigrip™ door handle with security heavy-duty built-in cylinder lock on solid doors
- Automatic interior light (solid doors only: switch concealed in door hinge)
- Stainless steel entrance ramps (removable)
- Stainless steel cart guides and bumpers
- Condensate heaters around door openings
- Three hinges per door
- Snap-in magnetic door gaskets
- Expansion valve refrigeration system
- Digital thermometer
- R-404a refrigerant for superior temperature recovery and pulldown
- Condensate evaporator
- Impact-resistant PVC breaker strip
- 3 year parts, 1 year labor warranty

OPTIONS & ACCESSORIES

- ☐ Modifications to permit storage of racks up to 72" in height (two and three section models only)
- ☐ Stainless steel back
- ☐ Stainless steel bottom
- ☐ Shelving options (in lieu of cart or above cart; please specify)
- ☐ Reach-in half doors on rear side of roll-thru models
- ☐ Glass doors
- ☐ Heated glass doors
- ☐ Triple pane glass doors
- ☐ Door locks for glass doors
- ☐ Condensing unit (air or water-cooled; please specify)
- ☐ Thermostat & solenoid
- ☐ Temperature alarm
- ☐ Digital temperature control
- ☐ Correctional facilities package
- ☐ Full-height, 12" top mount housing
- ☐ Double-deep configuration
- ☐ Custom modifications (please specify)



UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment
Since 1931

www.utilityrefrigerator.com

PROUDLY MADE IN THE USA






Project _____ Item# _____

UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU REFRIGERATORS-REMOTE

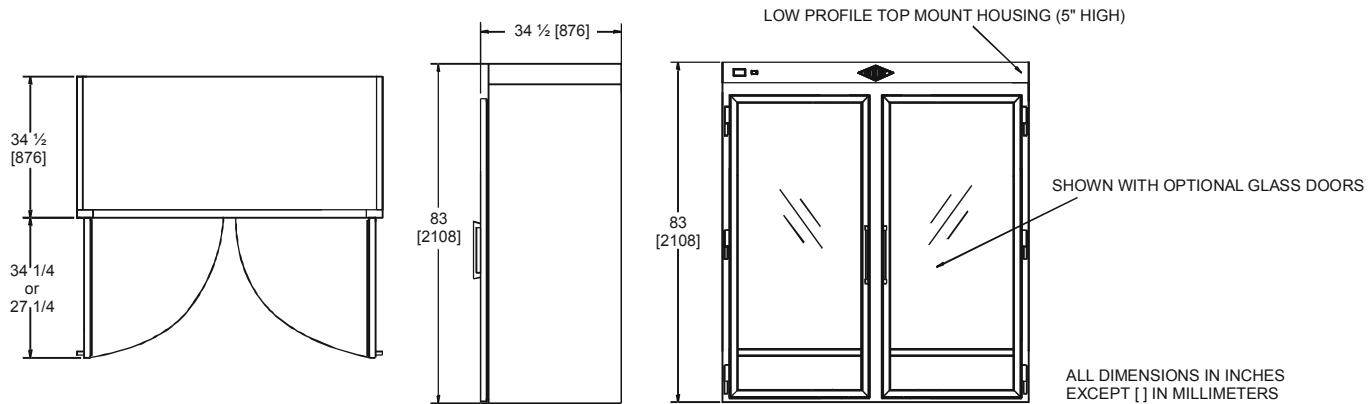

PRODUCT DATA (DATA IS FOR STD. MODELS: OPTIONS MAY CHANGE SPECIFICATIONS)	RIR-30	RIR-375 Extra Wide Door	RIR-60	RIR-75 2 Extra Wide Doors	RIR-90
Width (overall)	30"	37.5"	60"	75"	90"
Depth (overall)	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"
Height	83"	83"	83"	83"	83"
Depth (door open 90 deg.)	62"	69"	62"	69"	62"
Door opening (net width)	23 1/4"	30 3/4"	23 1/4"	30 3/4"	23 1/4"
Cart width, maximum	23"	30 1/2"	23"	30 1/2"	23"
Cart height, maximum	66"	66"	66"	66"	65"
Cart ht., max. (with optional mullion coil)	N/A	N/A	72"	72"	72"
Cart depth, maximum	29"	29"	29"	29"	29"
B.T.U req. (90° F amb., 20° F evap., 20' max. line length)	2360	2830	4470	5760	8560
Voltage (dedicated circuit required)	115	115	115	115	115
Amperage (with solid doors; consult factory for glass door amperages)	10.4	10.4	11.9	10.7	12.3
NEMA plug configuration	5-15P	5-15P	5-15P	5-15P	5-15P
Ship weight (lbs.)	605	740	1010	1184	1220
Ship volume (cu. ft.)	90	110	165	205	240
Crated dimensions (87" H)	33 1/2"W x 38 1/2"D	41"W x 38 1/2"D	63 1/2"W x 38 1/2"D	78 1/2"W x 38 1/2"D	93 1/2"W x 38 1/2"D

SPECIFICATIONS

Cabinet Exterior - Exterior sides are constructed of heavy gauge stainless steel or aluminum. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Top-mount housing and louver rails are stainless steel. Exterior digital thermometer. Cabinet body is 100% CFC free, foamed-in-place polyurethane insulation.

Cabinet Interior - All heavy gauge stainless steel construction with radius corners. Stainless steel cart guides and entrance ramps. Automatic interior light with concealed actuator (solid doors only). High output fluorescent lamp on glass door models. Door openings protected by impact-resistant PVC breaker strip. Optional cabinet modification allows storage of carts up to 72" high.

Doors - All stainless steel construction with magnetic snap-in gasket. Door perimeters have built-in energy saving condensate heaters. In order to prevent damage to door during installation, doors are equipped with self-closing lift-off cam hinges for easy door removal. Doors stay open at 120 degrees for easy access to interior. Optional glass doors have two panes for maximum refrigeration efficiency. The optional heated glass prevents condensation in humid environments. Standard hinging is left door hinged left, center and right doors hinged right (other configurations available; please specify.)

Refrigeration - R-404a refrigerant. Thermostatic expansion valve for superior performance and efficiency, faster temperature recovery, shorter running time and lower energy consumption. Electrical condensate evaporator.

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY REFRIGERATOR

Manufacturers of The Finest Quality Refrigeration Equipment Since 1931
10029 Bradley Ave. Pacoima, CA 91331
(818) 899-8300 Fax (818) 899-8335
www.utilityrefrigerator.com



UTILITY® IS PROUDLY MADE IN THE USA

RIRREM-GL