

General Information

Project Name: _____

Consultant: _____

Item #: _____

Model #: _____

Quantity: _____



Shown with
SG-PR Perforated
Grating



Specifications

IDFD Indirect Drain/Floor Sinks are 16GA type 300 series stainless steel, fully welded with a brush satin finish. Units are 11½" x 11½" square, 6½" deep. Top flange is sloped to the floor.

Weep holes and clamping flange provide pathway for floor leaks to be captured by a waterproof membrane and guided into the drain.

Coved bottom assures complete draining of all the waste water. 4" diameter drain pipe with perforated strainer is located at the center.

Grating is perforated 12GA stainless steel as shown. Other grating options are available.

Product Guide

Use in all facilities as an indirect or dedicated drain. NSF construction allows carts and foot traffic movement without impediment.

Weep holes and clamping flange for a waterproof membrane allow all leaks to be captured and prevents leaks in ceilings and floors.

Options*



- ☐ **DOD** - 3", 3½", 5", 6", 8" OD Tube (circle one)
- ☐ **WTO** - Waste Tube over 3" Long
- ☐ **AW** - Additional Wastes
- ☐ **WCP** - Waste Cup Strainers
- ☐ **BH** - Beehive Strainers (Each)
- ☐ **OCW** - Off Center Waste (Each)
- ☐ **ST12** - Scrap Tray Up to 18" Wide
- ☐ **PWT** - Perforated Waste Pipe
- ☐ **SF-2** - Special Size Setting Flange 2" Deep
- ☐ **SF-4** - Special Size Setting Flange 2" to 4" Deep
- ☐ **OWT** - Oversize Waste Tube
- ☐ **FSG** - Seepage Flange w/ Weep Holes
- ☐ **ST20** - Scrap Tray 20" Long
- ☐ **DSE** - Drain on the End
- ☐ **ROD** - Rim on Drain
- ☐ **BSPC** - Basket Strainer w/ Handle & Chain
- ☐ **BXD** - Box Type Drain
- ☐ **BSX** - Beehive Strainer for Box Drain
- ☐ **GA-12** - 12GA Upgrade

*See Price List for Complete Options

IDFD-90 0321



DRAWINGS

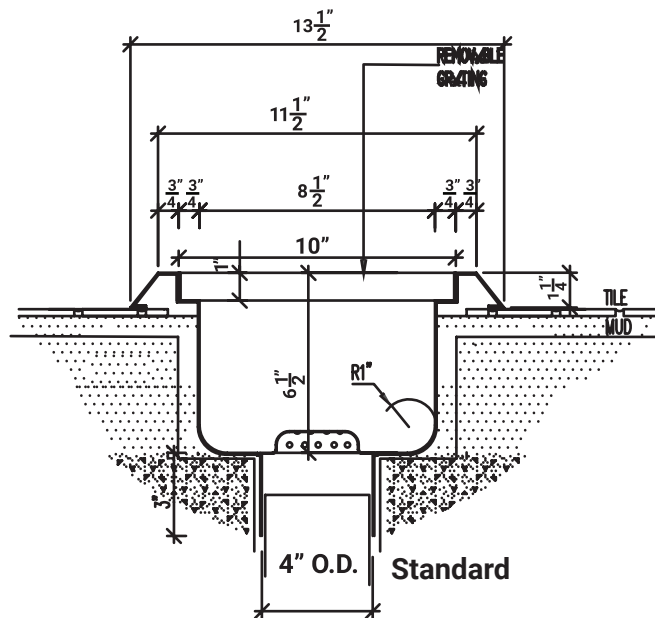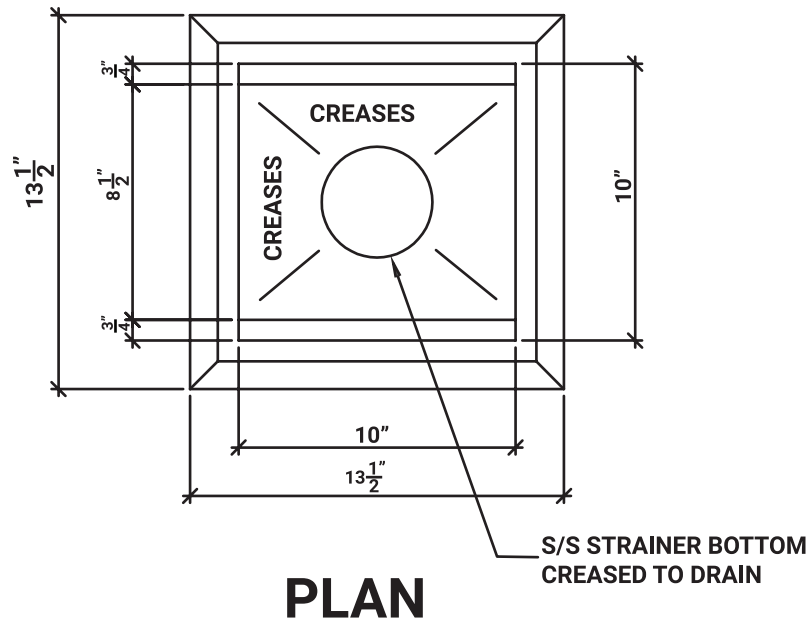

INDIRECT FLOOR DRAIN

Model	Size (W x L)
□ IDFD	11 1/2" x 11 1/2"

Specifications subject to change without notice.

IDFD-90 0321