PERLICK®

C COMMERCIAL

SELF-CONTAINED BACK BAR REFRIGERATOR

NSF c(UL)us 5 Year Compressor Warranty

SDBS108 shown

SDBS108 all black shown

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS
SDBS60
SDBS108

KEY PRODUCT FEATURES AND BENEFITS

- Self-closing sliding glass doors available in two or four door models
- Sliding glass door can be propped open for easy stocking
- All stainless steel interior with stainless steel or black top for long life durability and easy to clean hygienic storage
- 2″ Foamed-in-place insulation provides energy savings using Ecomate™, a blowing agent that has zero-ozone depletion and zero global warming potential
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- End wall compressor & evaporator design increases storage capacity by 14% compared to top mounted designs
- All sliding door models come with black framed glass doors
- Drawers not available on sliding door models

QUICK FEATURES

- Choose between all stainless exterior or all black option featuring Cerakote finished black handles and door locks.
- Choose compressor mounted on left or right side of cabinet to match your space
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges
    – Refrigerator (34°F–42°F) Factory set to 38°F
    – White Wine (40°F–65°F) Factory set to 45°F
    – Red Wine (40°F–65°F) Factory set to 60°F
- Choose between 6000K white LED lighting or cool blue display lighting
- Choose between flat shelving and wine racks for each compartment
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty

OPTIONS

MODEL NOS.	DESCRIPTION
SDBS60	2-Door Model
SDBS108	3-Door Model

Form No. 95178
Rev. 05.29.25

PERLICK®

COMMERCIAL

SELF-CONTAINED BACK BAR REFRIGERATOR

MODEL NUMBERS		SDBS60	SDBS108
NUMBER OF DOORS		2	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	60 (1524)	108 (2743)
	Depth - in. (mm)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34⁹⁄₁₆ (878)	34⁹⁄₁₆ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)	92 (2337)
	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	28½ (724)	28½ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		14.8 (419)	30.9 (875)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	353/553	753/1183
	STAGGERED - 12 OZ. BOTTLE/CAN	381/592	815/1272
SHIPPING WEIGHT Lbs. (kg.)		380 (172)	630 (286)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	2.5	4.2
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital control	Digital control
	Lighting Type	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/5	1/4
	Refrigerant	R290	R290
	Refrigerant Charge gm.	100	90
	Heat Rejection at 75F BTU/hr	1900	2300
	Factory Temperature Setting - Refrigerator F (C)	38° (3.3°)	38° (3.3°)
	Temperature Range - Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting - White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting - Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range - Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube
	Pull-Out Condensing Unit	Yes	Yes
	Front Vented	Yes	Yes
PLUMBING	Floor Drain Included	Yes	Yes
	Evaporator Condensate	Automatically	Automatically

Wine Temperature refrigerators do not carry NSF Rating for open food storage.
Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.

PERLICK®

COMMERCIAL

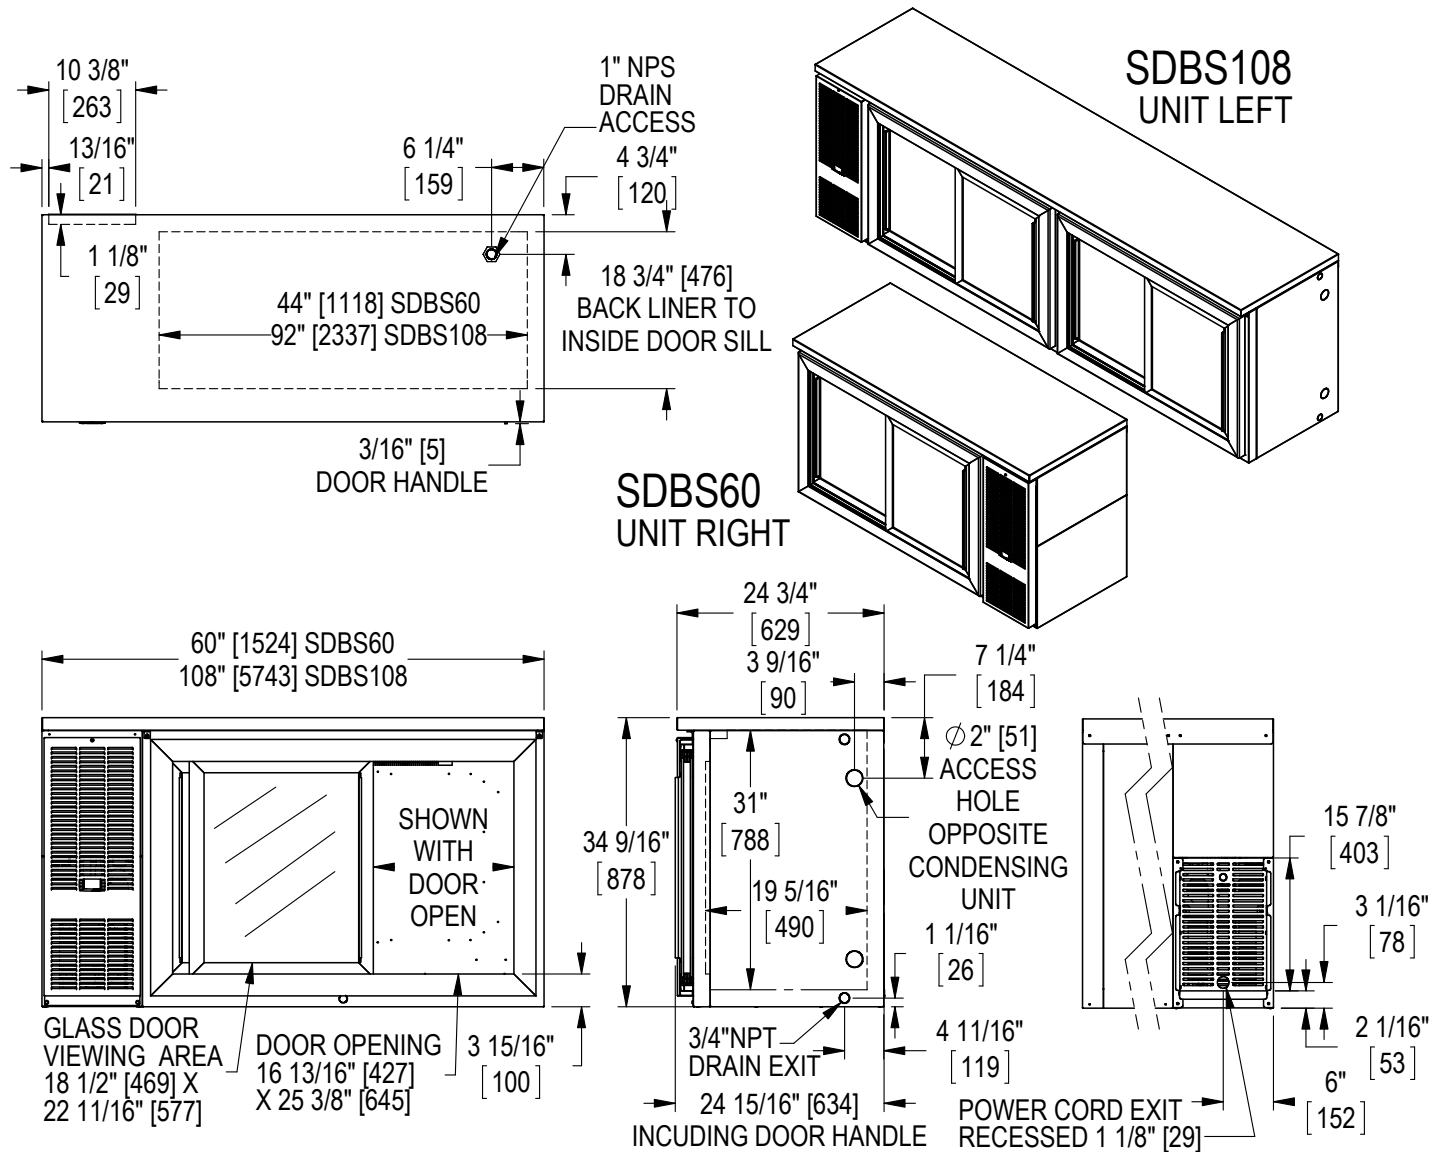## SELF-CONTAINED BACK BAR REFRIGERATOR

Note: Open floor drain not provided on models intended for non-packaged food.

SDBS108
UNIT LEFT

SDBS60
UNIT RIGHT

10 3/8" [263]

13/16" [21]

1 1/8" [29]

6 1/4" [159]

1" NPS DRAIN ACCESS

4 3/4" [120]

44" [1118] SDBS60
92" [2337] SDBS108

18 3/4" [476] BACK LINER TO INSIDE DOOR SILL

3/16" [5] DOOR HANDLE

60" [1524] SDBS60
108" [5743] SDBS108

SHOWN WITH DOOR OPEN

GLASS DOOR VIEWING AREA
18 1/2" [469] X 22 11/16" [577]

DOOR OPENING
16 13/16" [427] X 25 3/8" [645]

3 15/16" [100]

24 3/4" [629]

3 9/16" [90]

7 1/4" [184]

Ø 2" [51] ACCESS HOLE OPPOSITE CONDENSING UNIT

34 9/16" [878]

31" [788]

19 5/16" [490]

1 1/16" [26]

3/4"NPT DRAIN EXIT

4 11/16" [119]

24 15/16" [634] INCUDING DOOR HANDLE

15 7/8" [403]

3 1/16" [78]

2 1/16" [53]

6" [152]

POWER CORD EXIT RECESSED 1 1/8" [29]

⚠ **WARNING: California Prop 65 Notice**
These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at **perlick.com**. Or to find out more about Prop 65, go to **P65Warnings.ca.gov**.

Form No. 95178
Rev. 05.29.25