

Cuisine Series Heavy Duty Broiler W/Adjustable Racks

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- | | | | |
|-----------|-----------|-----------|-----------|
| • C36-ABR | • C24-ABS | • C36-ARR | • C24-ARS |
| • C36-ABC | • C36-ABS | • C36-ARC | • C36-ARS |



Model C36-ABR
 Range with 36" Broiler
 with Adjustable Racks

Standard Features

- Stainless steel front and sides
- Stainless steel stub back
- Stainless steel front rail
- Stainless steel burner box
- Individual burner controls
- 1 1/4" NPT front gas manifold
- 6" (152mm) Stainless Steel adjustable legs
- Can be installed individually or in a battery except the oven based models C36-ABR/C and C36-ARR/C, which can only be connected with other C36-ABR/C or C36-ARR/C broilers
- Briquettes (B) or cast iron radiants (R)
- Tilting adjustable grates (A)
- Extra large grease container
- Porcelain oven interior
- R model - 4 rack positions
 C model - 3 rack positions
- R model - 1 chrome plated racks
 C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°- 500°F (66°-260°C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A

Options & Accessories

- Stainless steel back
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Extra oven rack
- Single or double deck height back riser
- Stainless steel door(s) for cabinet base units
- Gas shut-off valves - 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Rear gas connection: 3/4" NPT (max 200,000 BTU's)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extension for 1/9 pans

Specifications

Garland Cuisine Series Range Match Char-Broiler, Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides and 6" (152mm) stainless steel legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).


Broilers - Radiant broilers have an 18K BTU individual burner rating. 24" and 36" offerings with adjustable grates. Briquette broilers have a 45K BTU burner rating. 24" and 36" offerings with adjustable grates.

NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Broiler W/Adjustable Racks

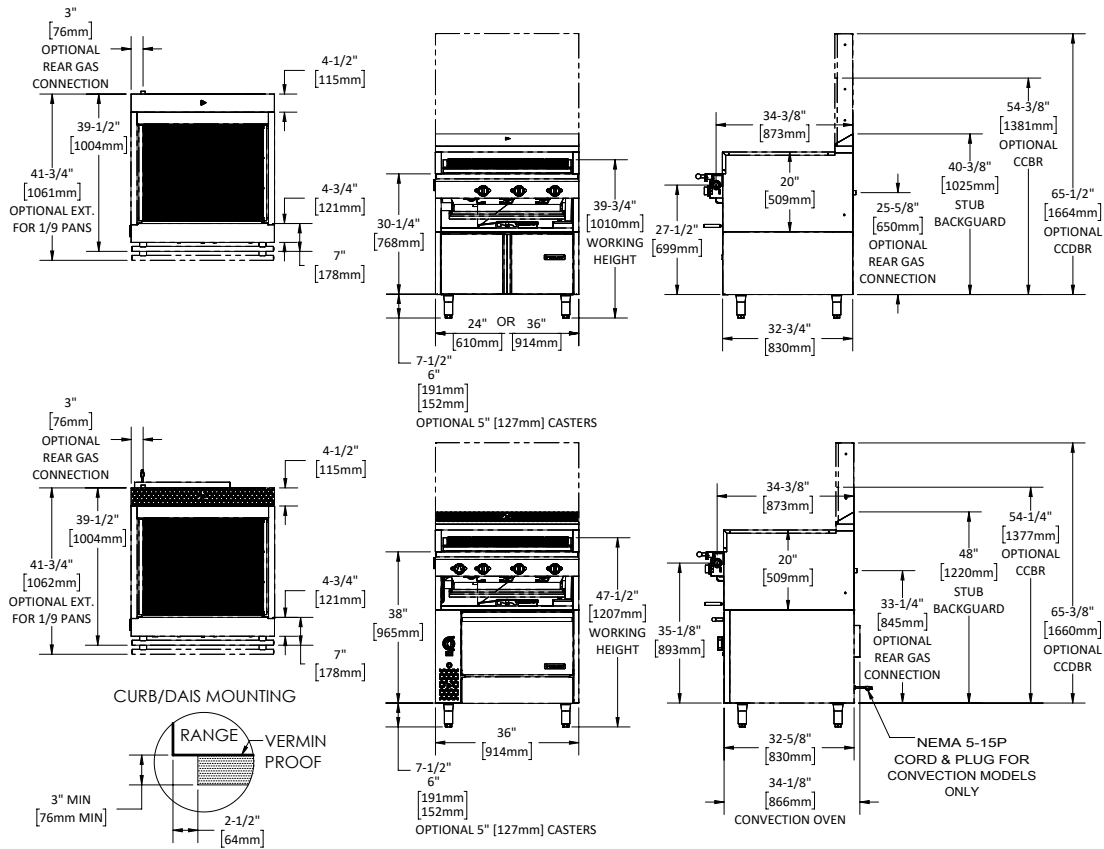

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C36-ABR	Briquettes w/Adjustable Grates, 36"W, w/standard oven	175,000	170,000	58	655 (297)
C36-ABC	Briquettes w/Adjustable Grates, 36"W, w/convection oven	172,000	170,000	70	655 (297)
C24-ABS	Briquettes w/Adjustable Grates, 24"W, w/storage base	90,000	90,000	58	390 (177)
C36-ABS	Briquettes w/Adjustable Grates, 36"W, w/storage base	135,000	135,000	58	480 (218)
C36-ARR	CI Radiants w/Adjustable Grates, 36"W, w/standard oven	148,000	143,000	70	635 (288)
C36-ARC	CI Radiants w/Adjustable Grates, 36"W, w/convection oven	145,000	143,000	70	635 (288)
C24-ARS	CI Radiants w/Adjustable Grates, 24"W, w/storage base	72,000	72,000	70	320 (145)
C36-ARS	CI Radiants w/Adjustable Grates, 36"W, w/storage base	108,000	108,000	70	342 (155)

*Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
CI = Cast-Iron

Individual Burner Ratings (BTU/h)		
Burner	NAT.	PRO.
Briquettes	45,000	45,000
Cast Iron Radiant	18,000	18,000
Standard Oven	40,000	35,000
Convection Oven	37,000	35,000

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)
Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)
36" Cabinet Base	14 (356)	32-1/4 (819)	31 (787)
24" Cabinet Base	14 (356)	20.5 (521)	31 (787)

Gas Pressure		NAT.	PRO.
Minimum Supply		7" WC	11" WC
Manifold Operating Pressure		6" WC	10" WC
Gas Manifold 1-1/4" NPT			

Combustible Wall Clearance	
Sides	Back
10" (254mm)	6" (152mm)

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7893A
01/24

