

E-LINE

REFRIGERATED | PASTRY | DESSERTS | PREPARED FOODS




Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Refrigerated Merchandiser

Standard Features:

- Ventilated cooling system
- LED lighting under each shelf
- Refrigerated lower deck with ambient/ dry shelves
- Self-Contained - with condensation pan (no floor drain required)
- Electronic digital control panel
- White exterior - RAL 9003, standard
- Adjustable equipment legs
- Straight glass (VD), standard
- Front glass opens for easy cleaning access
- Cord & plug (6ft cord)
- Plexi glass rear sliding doors
- Heavy duty casters, standard

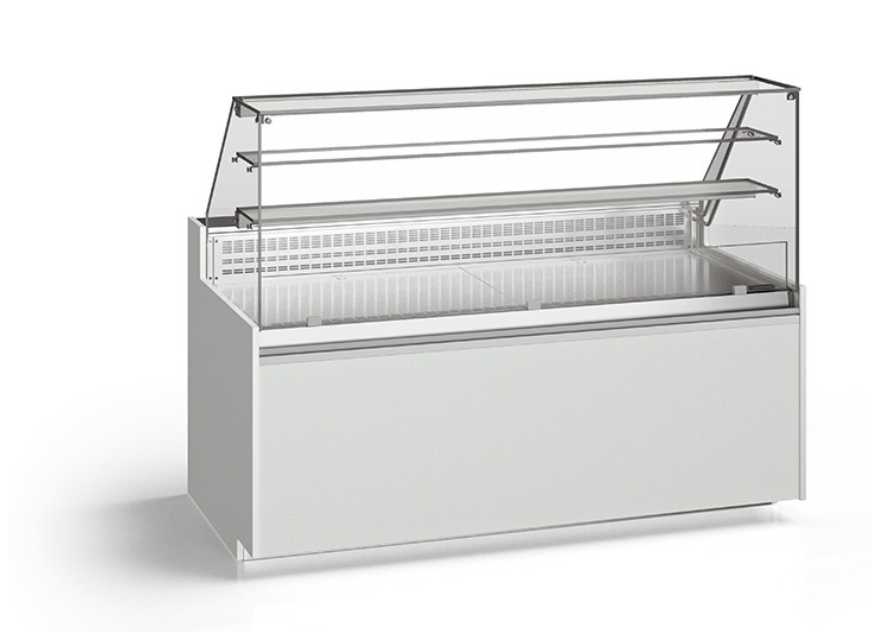

Optional Accessories:

- Channel Kit (to seam two separate cases together without side panels)
- Slim depth (24 $\frac{1}{4}$ ")
- Curved glass (VC)
- Remote (ask for specifications)
- Paint exterior panes, customer choice of RAL color




E-LINE


REFRIGERATED DISPLAY CASE




Top View

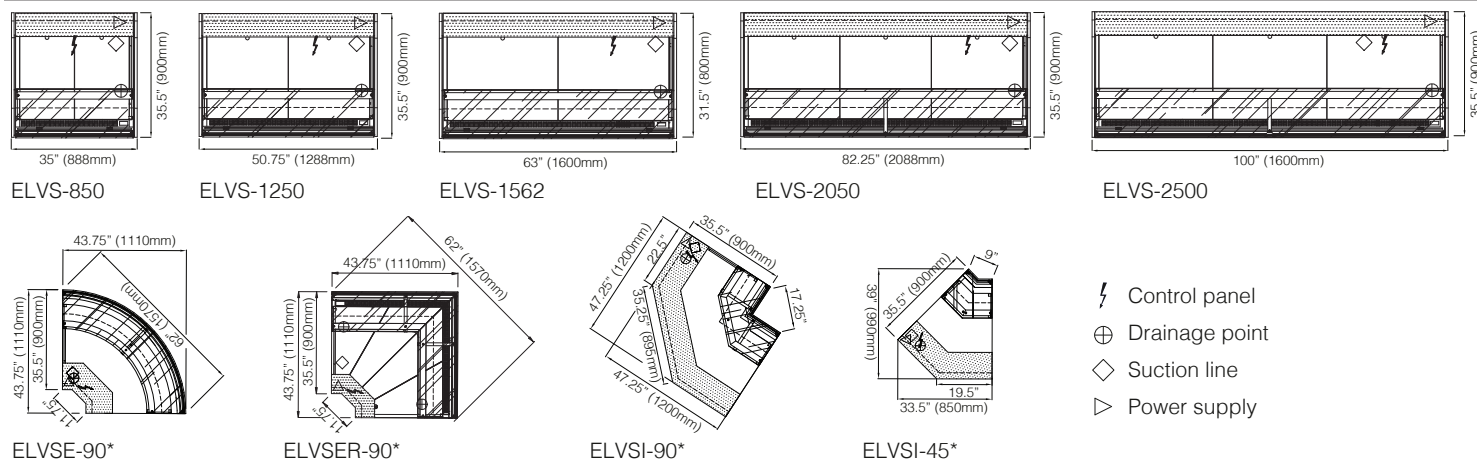

Side View

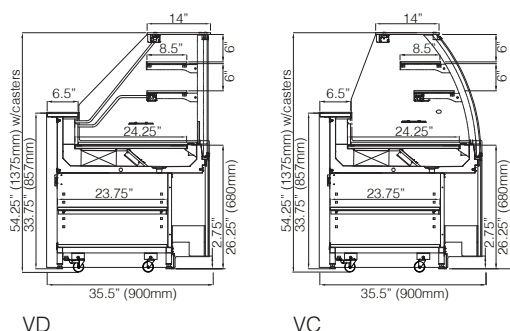


Rear View

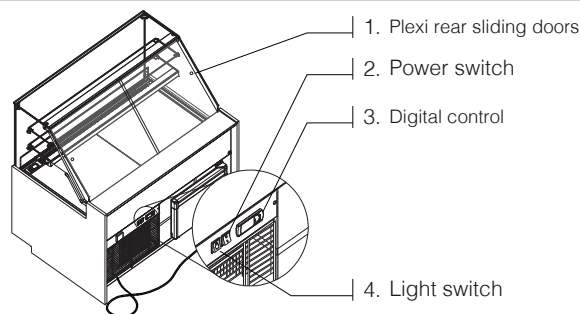

Technical Specifications & Electrical Requirements

Model #	Straight Glass	Cuved Glass	Dimensions W x D x H (In.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
ELVS-850	VD	VC	35" x 35.5" x 54.25"	7	1/3	6-15P	1.84
ELVS-1250	VD	VC	50.75" x 35.5" x 54.25"	8	1/3	6-15P	2.72
ELVS-1562	VD	VC	63" x 35.5" x 54.25"	9	1/2	6-15P	3.57
ELVS-2050	VD	VC	82.25" x 35.5" x 54.25"	10	1/2	6-15P	4.45
ELVS-2500	VD	VC	100" x 35.5" x 54.25"	11	1/2	6-15P	5.44
ELVSE-90*	VD	VC	62" x 35.5" x 54.25"	8	1/3	6-15P	2.84
ELVSER-90*	VD	VC	62" x 35.5" x 54.25"	8	1/3	6-15P	2.12
ELVSI-90*	VD	VC	17.25" x 35.5" x 54.25"	7	1/3	6-15P	2.43
ELVSI-45*	VD	VC	9" x 35.5" x 54.25"	6	1/3	6-15P	1.20

* Dimensions are without side panels on corner cases. Add 3/4" per side panel.



Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.