




New ASP-160(L) Reinforced Self-Empty Spiral Mixer

FEATURES

- Voltages available: 220V, 380V, 400V, 440V, 50Hz/60Hz, 3phase
- Simple to use, manual or automatic digital control panel.
- Hydraulic lifting and lowering system.
- Equipped with European Spiral Hook, Dough Knife and Bowl.
- Easy dough extraction controlled by the bowl jog switch.
- possible discharge height: into Divider at 1900 mm
- Possibility of bowl reverse rotation in 1st speed.
- Mixers designed with electronic control panel for higher efficiency.
- 2 powerful heavy duty motors, one for Bowl and one for the Hook
- Bowl, Dough Knife and Spiral Hook are S/steel.
- Superior torque transmission which eliminates vibration and noise For heavy loads.
- Metal-rubber composite gear type, non-slipping.
- Heavy duty frame with lead-free baked painting for easy cleaning.
- Motor overload protection.
- NSF, CE, ETL approval.

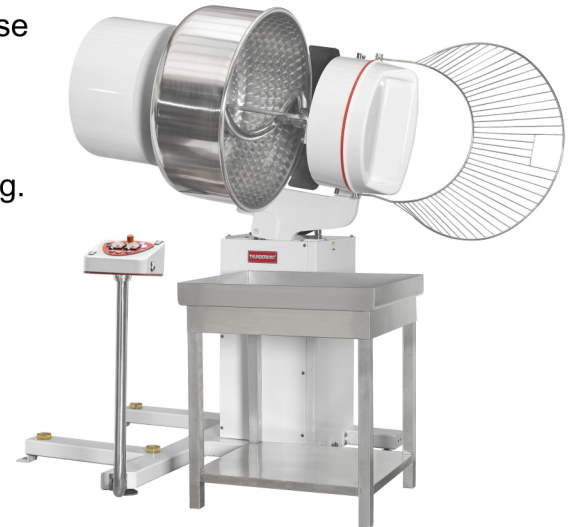

Technical Data

Power	Flour Capacity	Dough Capacity	Bowl Capacity	Dimension	Machine Weight t
12+2Hp	220 lbs Or 100 kgs	352 lbs Or 160 kgs	266 ltrs	77"(L)x65"(W)x71"(H) Or 1950 (L)X1650(W)X1800mm(H)	3113 lbs Or 1415 kgs

Specifications and Design subject to Change Without Notice

THUNDERBIRD FOOD MACHINERY INC.

4602 BRASS WAY. DALLAS, TX, 75236 U.S.A P.O. BOX 4768, BLAINE, WA, 98231 U.S.A
TEL: 1-214-331-3000 (8 lines), 1-866-7-MIXERS, 1-800-7-MIXERS
1-888-839-7789, 1-800-626-5168, 1-360-366-9328, 1-866-451-1668
FAX: 1-214-331-3581 (2 lines) 1-360-366-0998, 1-604-576-8527, 1-972-274-5053
Website: www.thunderbirdfm.com. www.thunderbirdfm.net E-Mail: tbfm@tbfm.com