



**REFRIGERATED
EQUIPMENT STAND
SELF-CONTAINED
LOW PROFILE
-SULP-SERIES**

ITEM # _____


QTY. _____

PROJECT:

CONSULTANT:

30" DEEP UNITS

CONSTRUCTION FEATURES

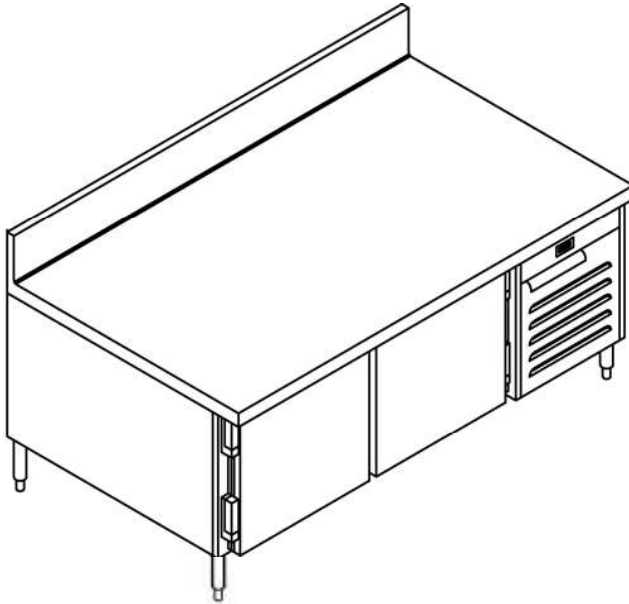

#SULP6430S

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT AND SIDES, TURN DOWN WITH 6" BACKSPLASH.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS ARE FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DOORS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DOORS ARE SELF CLOSING AND USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - ALL REFRIGERATORS USE R-448A REFRIGERANT. COMPRESSOR WITH HOT GAS CONDENSATE EVAPORATOR IS MOUNTED AT RIGHT END. BLOWER IS INSTALLED WITH EXPANSION VALVE. THERMOSTAT IS MOUNTED IN APRON REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **ELECTRICAL CONNECTION** - 115 VOLTS, 60 CYCLE, SINGLE PHASE, ALL UNITS PROVIDED WITH 6'-0" CORD AND PLUG-NEMA 5-15P.

OPTIONS AND ACCESSORIES

- | | | |
|---|---|--|
| ☐ INVERTED "V" EDGE | ☐ PLASTIC LAMINATE FRONT | ☐ SPECIAL BODY HEIGHT |
| ☐ RAISED ROLLED EDGE | ☐ PLASTIC LAMINATE LEFT END | ☐ CYLINDER LOCKS |
| ☐ RAISED CHANNEL EDGE | ☐ PLASTIC LAMINATE RIGHT END | ☐ FLANGED FEET |
| ☐ SPECIAL HEIGHT SPLASH | ☐ PLASTIC LAMINATE REAR | ☐ S/S KICK PLATES |
| ☐ LEFT END RETURN SPLASH | ☐ DIAL THERMOMETER | ☐ S/S CHANNEL BASE |
| ☐ RIGHT END RETURN SPLASH | ☐ FULL LENGTH RECESSED HANDLES | ☐ OMIT BACKSPLASH (TURNDOWN EDGE) |
| ☐ STAINLESS STEEL BACK | ☐ COATED BLOWER COIL | |
| ☐ LEFT SIDE COMPRESSOR | ☐ 208 VOLT SINGLE PHASE | ☐ OTHER: _____ |
| ☐ 5" DIAMETER POLY CASTERS | ☐ 208 VOLT THREE PHASE | |
| | ☐ 50 CYCLE FOR SPECIAL APPLICATION | |

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-19-1**



**REFRIGERATED
EQUIPMENT STAND
SELF-CONTAINED LOW
PROFILE -SULP- SERIES**


ITEM # _____

QTY. _____

PROJECT: _____

CONSULTANT: _____

30" DEEP UNITS

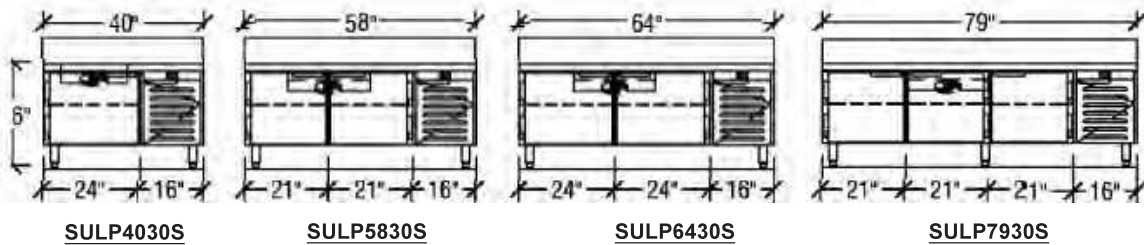


SULP4030S

SULP5830S

SULP6430S

SULP7930S

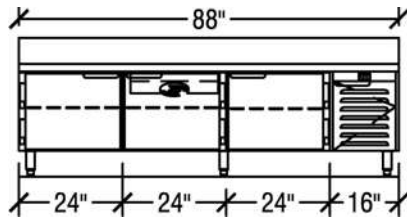

SULP8833S



SPECIFICATION DATA

MODEL	DOORS	CUBIC FEET	VOLTAGE	COMP. HP	AMPS	CRATED WEIGHT
SULP4030S	1 - 24"	4.45	115/60/1	1/4	4.0	340
SULP5830S	2 - 21"	8.50	115/60/1	1/4	4.0	410
SULP6430S	2 - 24"	9.68	115/60/1	1/4	4.0	450
SULP7930S	3 - 21"	13.14	115/60/1	1/4	4.8	495
SULP8830S	3 - 24"	14.92	115/60/1	1/4	4.8	545

MECHANICAL DATA

LEGEND

- C CONDENSING UNIT WIRED TO JUNCTION BOX/HARNESS
JB JUNCTION BOX/HARNESS WITH 6'-0" CORD AND PLUG (NEMA 5-15P)

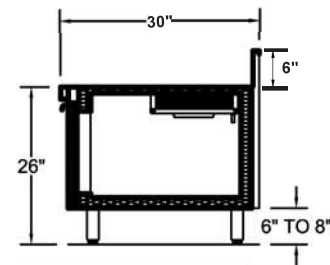

SECTION VIEW



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-19-2**