

Item No.:

Qty.:

Project:

## MF 350.2 2T Large Pass Thru

ROLL IN Blast Chiller and Shock Freezer



MultiFresh®: the multi-function assistant that will organize your production and processes with flexibility 24 hours a day.

MultiFresh is the first and only machine in the world that can run operating cycles with temperatures from 185°F to -40°F preserving its consistency, moisture content, and nutritional properties.

Multifunction 7" touchscreen display, product specific cycles, wide range of options, customization of all the parameters for each cycle.

### Capacity

Capacity: 2 x Combi Oven Trolley (sized for 18"x26" pans)

Capacity: 6 x SLIM Rack (sized for 12"x20" pans)

### Yield

Blast chilling capacity (194°F to +37°F) 772 Lbs. (within 90 min or less)

Shock freezing capacity (194°F to 0°F) 772 Lbs. (within 240 min or less)

R452a gas: Blast Chilling and Shock Freezing.

R448a gas: Blast Chilling only.

### Product Warranty Protection

- 2 years, parts and labor.
- 5 years, compressor.

### Certification



### Standard Construction Features

- CABINET + REMOTE CONDENSING UNIT.
- All type 304 stainless steel construction.
- CFC-free high-density polyurethane insulation.
- Full width door with low-temperature resistant magnetic gasket.
- MultiSensor® 5-point probe for perfect temperature control.
- Automatic switch from manual mode (timed) to automatic mode (with probe) when probe is not inserted.
- The approved R452A refrigerant, used in a sealed system, is suitable for both blast chilling and shock freezing. The approved R448A refrigerant, used in a sealed system, is suitable for blast chilling only.
- High efficiency evaporators with multiple injection points.
- Data port & Wi-Fi capable data transfer to HACCP software.
- Door hinged right.
- End-of-cycle hold mode.
- Self-contained, air-cooled energy efficient condensing unit.
- Manual defrosting required at the end of the day.
- SANIGEN sanitation system.
- 2-1/4" thick insulated floor.
- Sunken Floor.
- Drain on left side (different position on request).
- Knocked down.

### Unique Design and Performance Features

- 4 cycles in standard mode, 43 product specific cycles in dynamic mode; ability to record up to 20 replicable cycles into customized recipe book.
- Indirect air distribution and special airflow pattern to ensure perfect temperature uniformity.
- Moisture preservation system by "delta-t" control.
- MultiFresh® touch screen.
- Smudge-resistant controller touch pad.
- Easily accessible evaporators and waterproof fans.
- 30-40% more energy efficient than average competitor models with faster chilling times, all while preserving freshness, fragrance and organic properties of the food.

### Option and Accessories

- Door hinged left.
- Ramp.
- Sous-vide core probe.
- 120° or 100° Door Stop.
- City line or Water Tower Remote Condensing unit.
- Pass thru version.
- Mirror Unit.
- Additional core probe.
- Magnetic Door Stop.
- Freshcloud Connection Kit.
- Winter Package.
- Correctional Packages.
- Anti-Vibration Feet for Condensing Unit.
- Cabinet Lighting.
- 14" or 24" Ramp Options.

- Available PLUS model version with heat cycles: THAWING, HOLDING (hot or cold), REGENERATION, PASTEURIZATION, PROOFING, LOW TEMPERATURE COOKING.

Item No.:

Qty.:






Project:

## CABINET

FRONT VIEW

SIDE VIEW

TOP VIEW

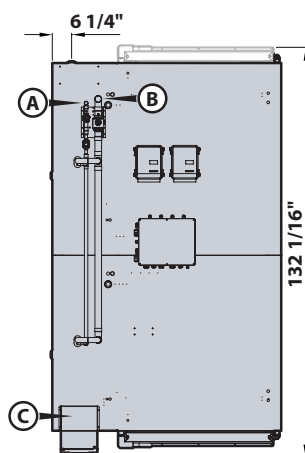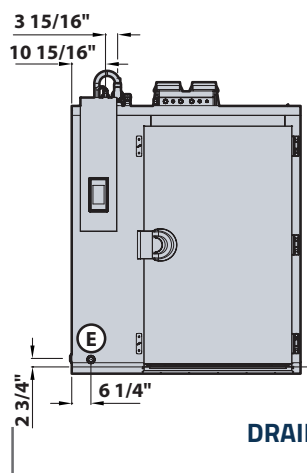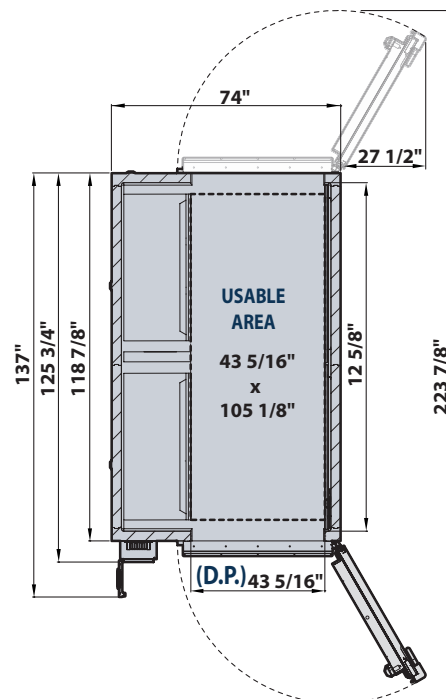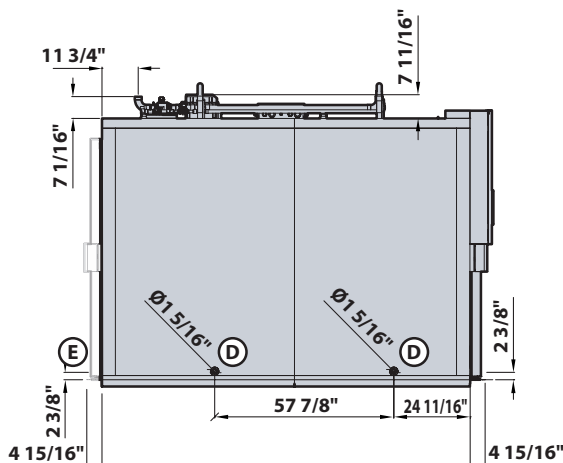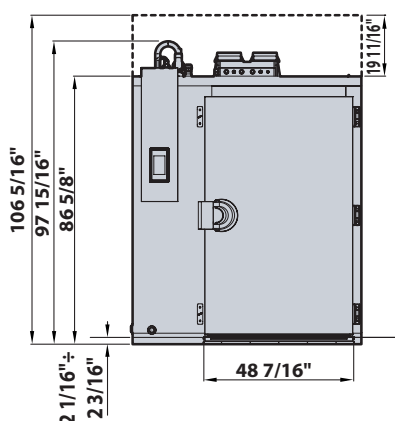

DRAIN POSITION

### GENERAL CHARACTERISTICS

(A) Liquid line connection

(B) Suction line connection

(C) Communication power cable inlet

(D) Standard drainage discharge       $\varnothing$ In (ømm)      1" 1/4 DN32

(E) Drainage discharge on request       $\varnothing$ In (ømm)      1" 1/4 DN32

(D.P.) = Door passage

The back door is optional and on request

### STANDARD PACKING

Gross Weight	Lb	2602
Dimensions (W x D x H)	In	138" 9/16 x 79" 15/16 x 100" 3/8 N°1
Volume	ft <sup>3</sup>	643.35

Item No.:

Qty.:

Project:

## TECHNICAL DATA

Electric supply:		208V-3+PE 60Hz	
Variants		Standard	PLUS
Power rating	kW	6.7	22.2
Current rating	A	20.9	62.0
Minimum circuit amps (MCA)	A	21.0	73.0
Max overcurrent protection device (MOPD)	A	25.0	70.0
Main power cable	AWG	10AWG/4C	2AWG/4C
Section of electrical cable between cell and unit	AWG	14AWG/5C	
Refrigerant type:		R452a / R448a	
Maximum ambient air temperature:	°F	90	
Cabinet weight:	Lb	2205	
Effective internal Cell volume	ft³	214	
Sunken floor (standard)		✓	
Maximum height of the cell with sunken floor	In	94" 5/16	
Pit Dimensions(Sunken Floor Version) W x D x H	In	74" 7/16 x 119" 5/16 x 2" 3/16	
Floor with ramp option		✓	
Maximum height of the cell with ramp	In	96" 7/16	
Standard ramp length	In	23" 5/8	
Optional ramp length	In	14"	
Ramp height	In	2" 5/16	
Ventilated floor with ramp option		✓	
Maximum height of the cell with ramp and ventilated floor	In	97" 1/4	
Ramp length	In	23" 5/8	
Ramp height	In	2" 5/16	

## TUBES CONNECTING TO THE CONDENSING UNIT

Liquid Line Connection	øIn (ømm)	7/8" (22.22 mm)
Suction line connection	øIn (ømm)	1" 5/8 (41.27 mm)
Valid for condensing units installed up to a distance of	ft	95 *

\*: If a lineset is longer than 95ft to please contact the manufacturer for any changes to line sizes and p-trap placement.

## BLAST CHILLER SIZE

		R452a	R448a
Yield for blast chilling cycle: (194/+37°F)	Lb	772	772
Yield for shock freezing cycle: (194/-0°F)	Lb	772	-

R452a gas: Blast Chilling and Shock Freezing.

R448a gas: Blast Chilling only.


Specification could change without notice due to continuous product development.

Item No.:

Qty.:

Project:

## UNIT

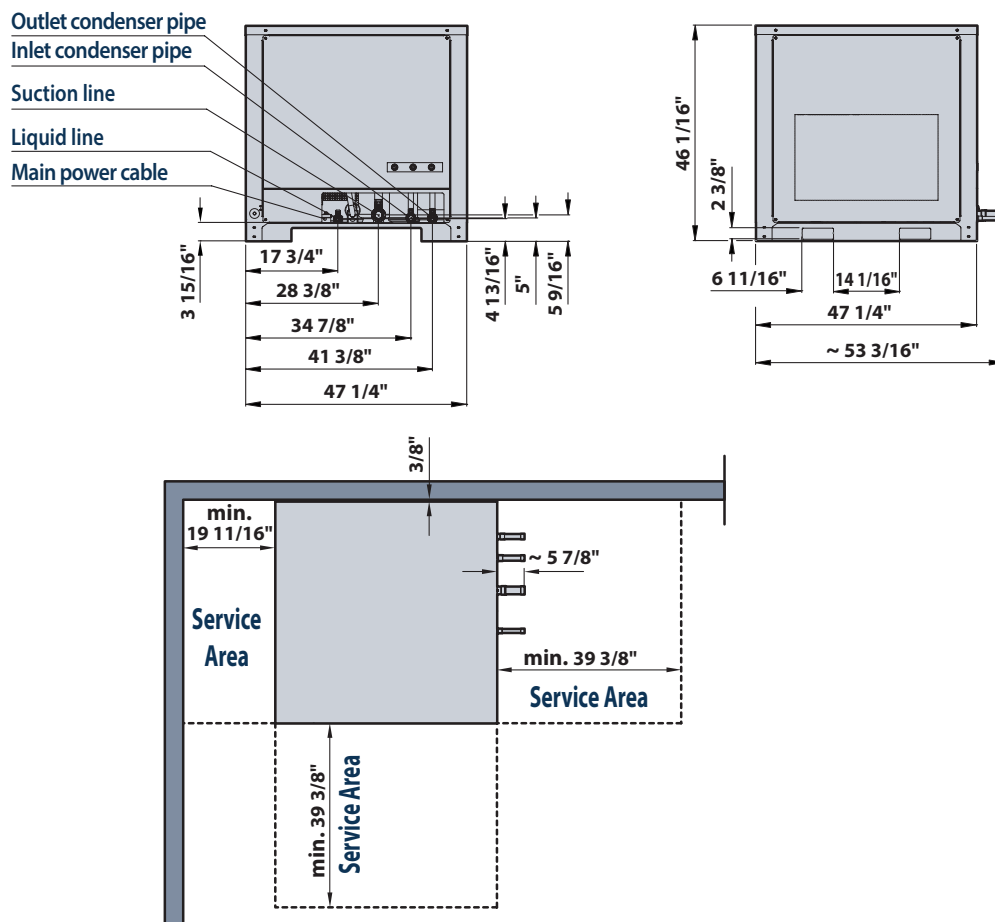

### STANDARD PACKING

Gross Weight	Lb	988.00
Dimensions (W × D × H)	In	58" 1/4 × 58" 1/4 × 68" 15/16 × N° 1
Volume	ft³	137.00

Item No.:

Qty.:

Project:

## TECHNICAL DATA

Electric supply:	-	208V-3+PE 60Hz
Power rating	kW	33.8
Current rating	A	107.9
Minimum circuit amps (MCA)	A	132
Max overcurrent protection device (MOPD)	A	225
Main power cable	AWG	2-0AWG/3C + 2AWG/1C
Cabinet - condensing unit connection cable	AWG	14AWG/5C
Condensing unit - condenser connection cable	AWG	14AWG/11C
Compressor rating	HP	25
Max cabinet refrigeration power at 14/104 °F (R452a/R448a)	btu/h	172624 / 163063
Max condenser heat dissipation at 14/104 °F (R452a/R448a)	btu/h	236367 / 220520
Refrigerant type:	-	R452a / R448a
Refrigerant PRE-load	oz. gas	846.5
Liquid Line Connection	øIn (ømm)	7/8" (22.22 mm)
Suction line connection	øIn (ømm)	1" 5/8 (41.27 mm)
Inlet remote condenser line	øIn (ømm)	1" 1/8 (28.58 mm)
Outlet remote condenser line	øIn (ømm)	1" 1/8 (28.58 mm)
Compressor displaced volume	ft³/h	3136.6
Maximum ambient air temperature:	°F	108
Remote unit weight:	Lb	882
Oil Charge	gal	1.20


Specification could change without notice due to continuous product development.

Item No.:

Qty.:

Project:

## CONDENSER

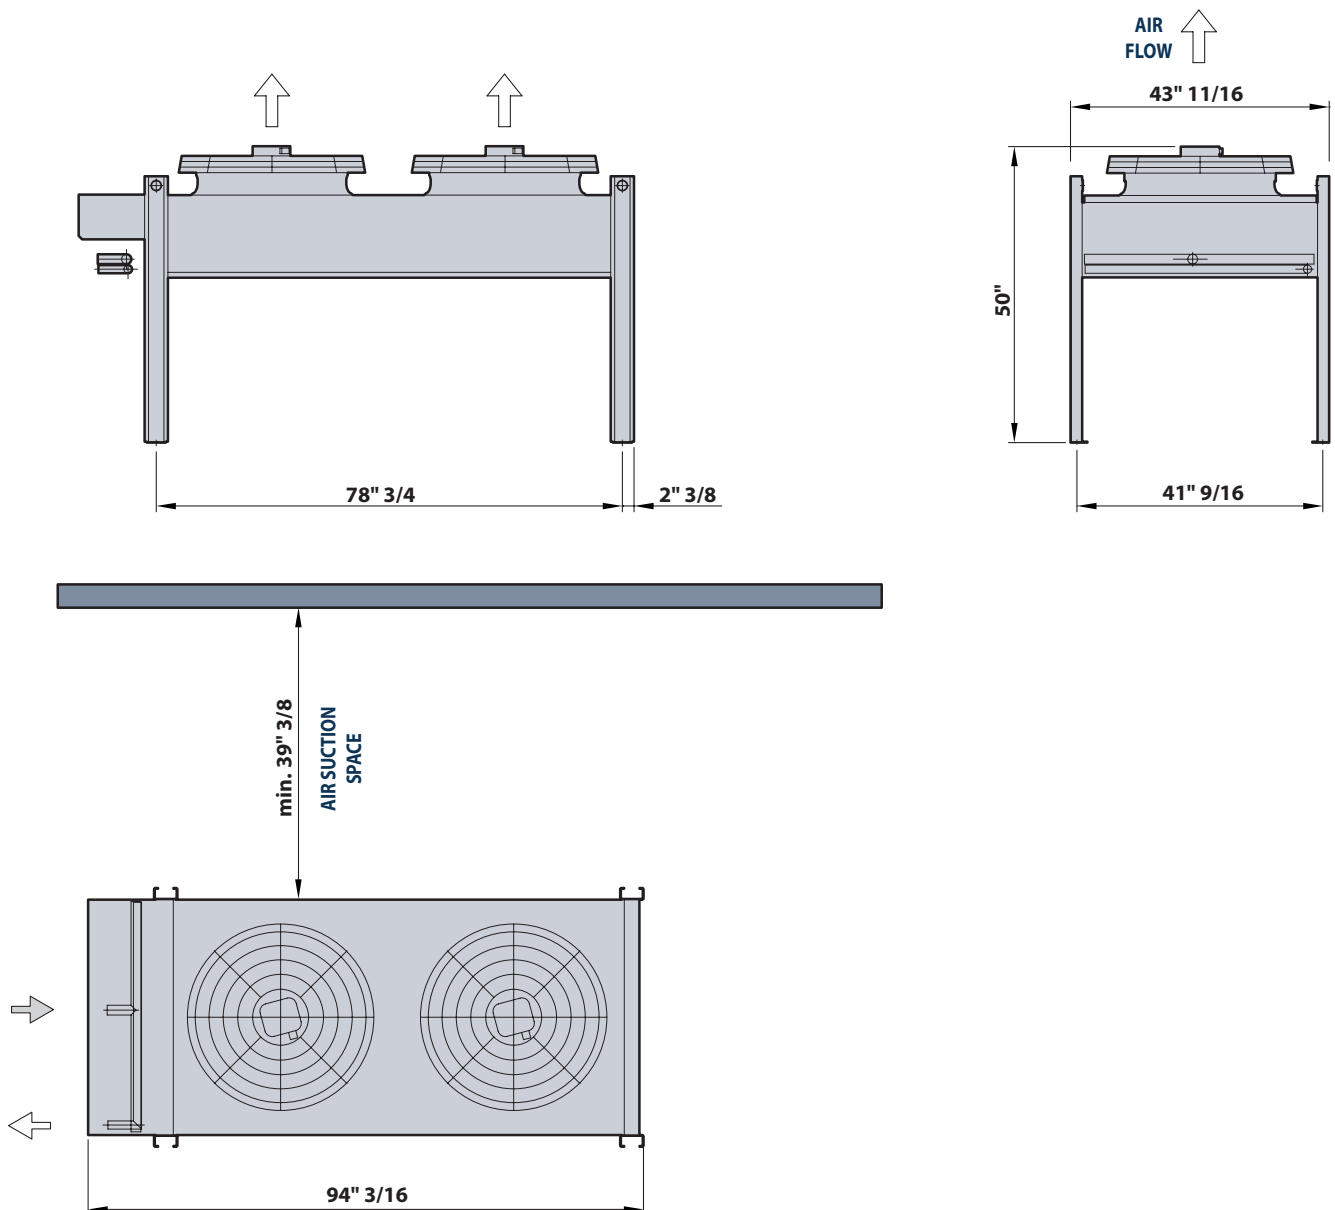

### REMOTE CONDENSER

Mains frequency:	-	60 Hz
Condenser noise (max) 32.8 ft	dB(A)	68.0
Total air flow:	ft <sup>3</sup> /h	738332
Fan Quantity		2
Maximum ambient air temperature:	°F	108
Condenser weight:	Lb	408
Valid for remote condenser installed up to a distance of	ft	135*

### STANDARD PACKING

Gross Weight	Lb	450.00
Dimensions (W x D x H)	In	126" x 23" x 34" x N° 1
Volume	ft <sup>3</sup>	215.00

\*: If a lineset is longer than 135ft to please contact the manufacturer for any changes to line sizes and p-trap placement.

Specification could change without notice due to continuous product development.

### Irinox North America

9990 NW 14th Street Suite 107 Miami FL 33172

Phone. (786) 870 5064 Fax. (786) 391 2467

www.irinoxprofessional.com/usa/ | info@irinoxnorthamerica.com