





Specifications

F.O.B. Sedalia, Missouri 65301

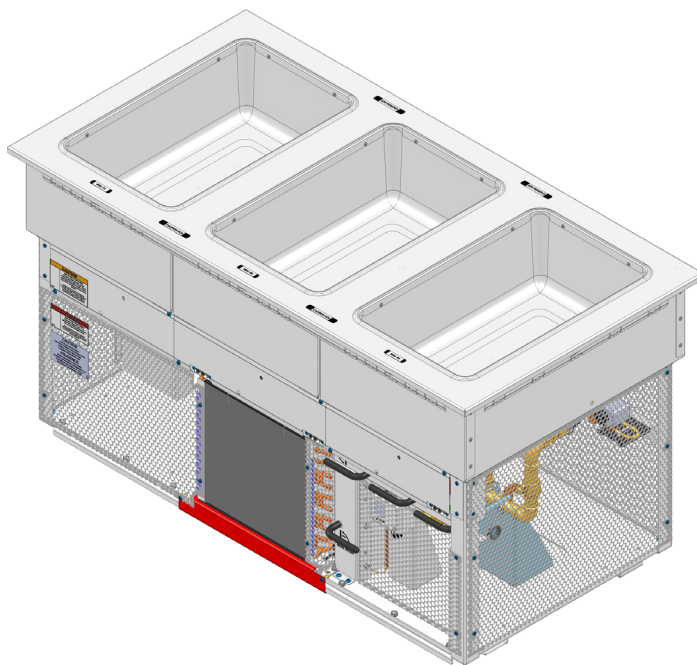

Model HCF-3 Shown



**Touch Screen Control
can be mounted in cabinet body**

OPTIONS:

- ☐ No drain, dry heat only with removable non-stick liner

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1283 Duke HotColdFreeze - R290

Specification subject to change



Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Duke HotColdFreeze™

- | | |
|--------------------------------|---------|
| ☐ HCF-1 | 1 Wells |
| ☐ HCF-2 | 2 Wells |
| ☐ HCF-3 | 3 Wells |
| ☐ HCF-4 | 4 Wells |
| ☐ HCF-5 | 5 Wells |

BODY:

- Top Mount with flush mount pans
- Stainless Steel - formed, welded, and polished to high finish
- Sealing gasket
- Drains at each well

CAPACITIES:

- Standard 12" x 20" steam table pans
- 2-1/2", 4" and 6" deep

CONTROLS:

- Intuitive, easy to use touch screen control changes mode of operation
- 3 wet heat, 3 dry heat, 3 refrigerated and 1 freeze mode.
- 1 control per food well
- Controls have a built-in Wifi modem and redundant controls capabilities for future activation.
- Unit shipped with 10" cable installed between control and touchscreen. Six foot cord is supplied if needed.
- Complies with part 15 of the FCC rules.

Refrigeration:

- 5 Year compressor replacement
- Compressor slides out 15.375" for easy service.
- Compressor enclosed in perforated Aluminum
- R290 Refrigerant 

Serviceability:




- Unit can be serviced in counter, no need to remove.
- Six foot Cord and plug supplied.

CERTIFICATIONS:




ANSI/ NSF 169
REV B 01/21/2025


Duke HOTCOLDFREEZE™

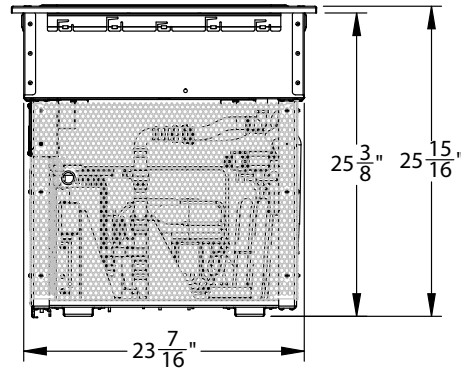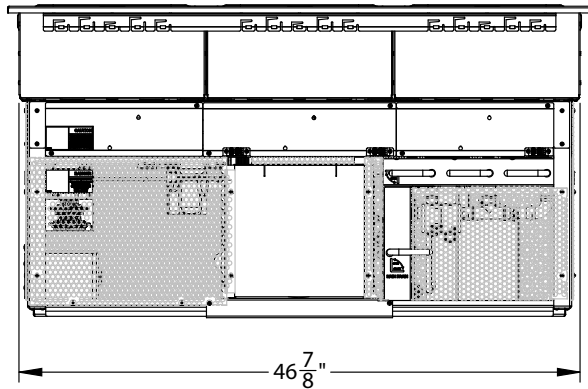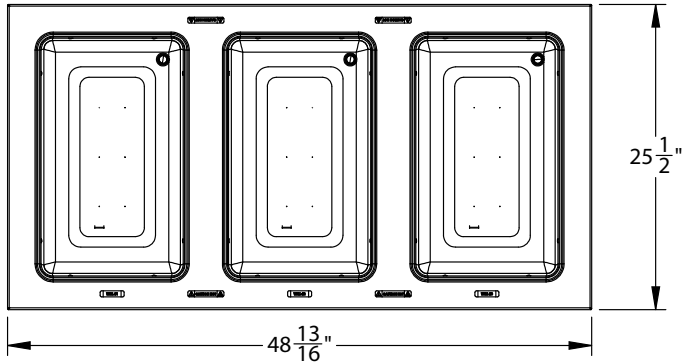


Model HCF-3 Shown

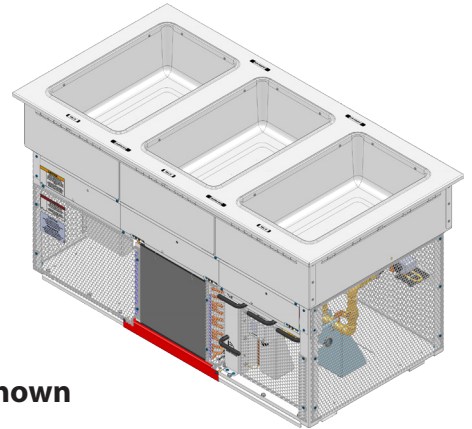

Control Specifications



Control Cutout



Note: Controls can be mounted in cabinet body

ELECTRICAL SPECIFICATIONS:

Model	120V/60Hz		120 / 208V 60Hz		120 / 240V 60Hz		Refrigeration				≥Am² Minimum Room Floor Area Required	
	Amps	NEMA	Amps	NEMA	Amps	NEMA		HP	Refrig.	Grams	(A) Square Meters (m²)	Square Feet (F²)
HCF-1	5.5	5-15P	5.5	L14-20P	5.5	L14-20P		1/3	R290 	100	4.785	51.51
HCF-2	10.7	5-15P	10.0	L14-20P	10.0	L14-20P		1/3	R290 	170	8.134	87.55
HCF-3	18.4	L5-30P	18.4	L14-30P	18.4	L14-30P		1/2	R290 	220	10.526	113.30
HCF-4	23.6	L5-30P	18.4	L14-30P	18.4	L14-30P		1/2	R290 	300	14.354	154.51
HCF-5	29.1	5-50P	28.4	14-50P	28.4	14-50P	Sys-1	1/3	R290 	170	10.526	113.30
							Sys-2	1/2	R290 	220		

DIMENSIONS:

Model	Unit dimensions								Drain Location				Cutout Dimensions				Cube ft. Crated	Weight	
	Length		Depth		Height		Liner Widths		D1		D2		Length		Width			lbs	kg
	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm	in	cm			
HCF-1	17.50	44.45	25.5	64.77	25.94	65.89	23.82	60.50	2.81	7.14	2.94	7.47	16.00	40.64	24.00	60.96	12.5	95	43
HCF-2	33.19	79.22	25.5	64.77	25.94	65.89	23.82	60.50	22.44	57.0	2.31	5.87	31.69	80.50	24.00	60.96	21.0	145	65.8
HCF-3	48.82	124.00	25.5	64.77	25.94	65.89	23.82	60.50	7.63	19.38	7.31	18.57	47.38	120.35	24.00	60.96	28.9	198	89.8
HCF-4	64.50	163.82	25.5	64.77	25.94	65.89	23.82	60.50	23.0	58.42	7.63	19.38	63.00	160.02	24.00	60.96	38.0	287	130.2
HCF-5	80.19	203.68	25.5	64.77	25.94	65.89	23.82	60.50	38.94	101.45	7.31	18.57	79.00	200.66	24.00	60.96	45.0	340	154.2

FREIGHT CLASS: 100



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com Printed in U.S.A.
© 2025, Duke Manufacturing Co.