



SPEC SHEET

Reserve 24 in. Commercial and Residential Undercounter Dry Aging Refrigerator in Stainless Steel

Model: KM-DAR-34SS

FEATURES

- **KoolMore Reserve Collection:** Premium dry aging unit from KoolMore's high-end Reserve line.
- **Precision Aging Environment:** Maintains a consistent temperature of 36–43°F, and 80% humidity to create ideal conditions for aging a wide range of foods.
- **UVC and Humidity Control:** Features an active UVC-ventilated disinfection system and automatic humidity control for a clean, stable aging environment.
- **Digital Controls:** Front LCD control panel for precise temperature and humidity settings.
- **Dual LED Lighting:** 160-lumen white LEDs on both sides provide full interior visibility without added heat, with a built-in light switch.
- **High-Quality Stainless-Steel Construction:** Crafted from food-grade 304 stainless steel throughout the interior and exterior.
- **Tempered Glass Door:** Equipped with a tempered glass door with reversible hinge options.
- **Auto Defrost and Air Circulation:** Automatic defrost system and internal fan ensure even cooling and prevent frost buildup.
- **Compact Undercounter Design:** Fits 24 in. W x 23 in. D x 34.13 in. H, ideal for under-counter or built-in commercial installations.
- **Complete Setup Kit:** Includes shelves, hanger bar, hooks, drip pan, UVC bulb, charcoal filter, and handle.
- **Commercial Certified and Warranty:** ETL certified for commercial use and backed by a 3-year manufacturer's warranty.



CLOSE UP IMAGES



Technical Specs

Dimensions & Weight

Length	23.39 in.
Width	22.64 in.
Height	33.86 in.
Interior Depth	17.32 in.
Interior Width	19.41 in.
Interior Height	20.4 in.
Weight	130 lbs
Shelf Depth	23.2 in.
Shelf Width	21.7 in.
Depth Excluding Handles	22.64 in.
Depth Including Handles	24.37 in.
Depth Less Door	20.87 in.
Depth With Door Open 90 Degrees	44.69 in.
Height to Top of Door Hinge In	34 in.
Counter Depth	Yes
Minimum Back Air Clearance	Not Required
Minimum Side Air Clearance In	0.25 in.

Electric & Certifications

Certifications	ETL Listed for Safety and Sanitation
Amps	3
Hertz	60
Phase	1
Voltage	115
Wattage	250
Plug Type	NEMA 5-15P
Power Cord Length	70.87 in
Energy Consumption kWh Year	660 KWH/year
Horsepower	0.25


Capacity

Gross Cubic Feet	5.3
Net Cubic Feet	3.82
Individual Shelf Capacity	60 lbs
Temperature Range	36-54 F
Ambient Temperature Range	60-110 F

Features & Materials

Installation Type	Freestanding or Built-in
Defrost Type	Automatic
Refrigerant Type	R-600a
Cooling Unit Type	Automatic
Number of Doors	1
Door Style	Swing
Number of Shelves	2
Temperature Control Type	Digital
Humidity Control	Yes
Humidity Alarm	Yes
Interior Lights	LED
Interior Lights Color	White
Digital Temperature Control	Yes
Digital Humidity Display	Yes
Color Finish	Stainless Steel
Color Door Handles	Stainless Steel
Door Material	Stainless Steel and Glass
Shelf Material Type	Stainless Steel
Noise	43 dB
Thermostat Type	Digital
Shelves Adjustable	Yes
Glass Type	Tempered with UV Protection
Gauge of Stainless Steel	24
Hanger Capacity	110 lbs
Hanger Material	Stainless Steel
Safety Lock	Yes
Reversible Door	Yes

Plan View

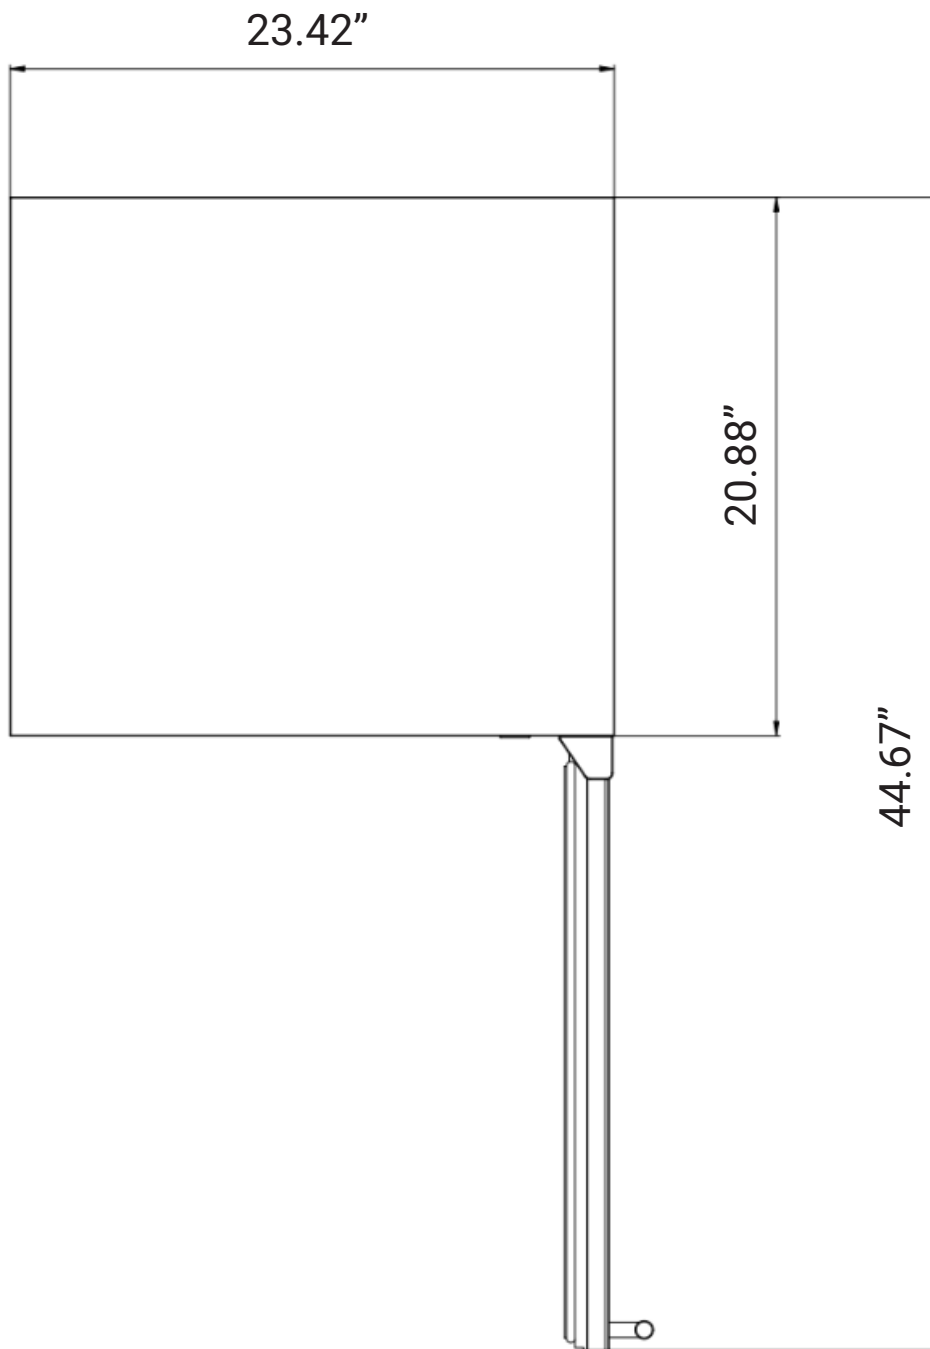

CERTIFICATIONS



718-576-6342
info@koolmore.com