

UNDERCOUNTER FREEZERS

MODEL: MVF29UHC MVF48UHC MVF60UHC



MVF29UHC



MVF48UHC



MVF60UHC


Maxx Cold V-Series Undercounter Freezers are designed for performance – holding your products at their ideal storage conditions. These undercounter freezers make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans
-

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


NET STORAGE CAPACITY (Cu Ft)

MVF29UHC.....	7.8 Cu Ft (221 L)
MVF48UHC.....	14.1 Cu Ft (399 L)
MVF60UHC.....	18.5 Cu Ft (524 L)

TEMPERATURE

Holding temperature 0°F to 10°F (-18°C to -23°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

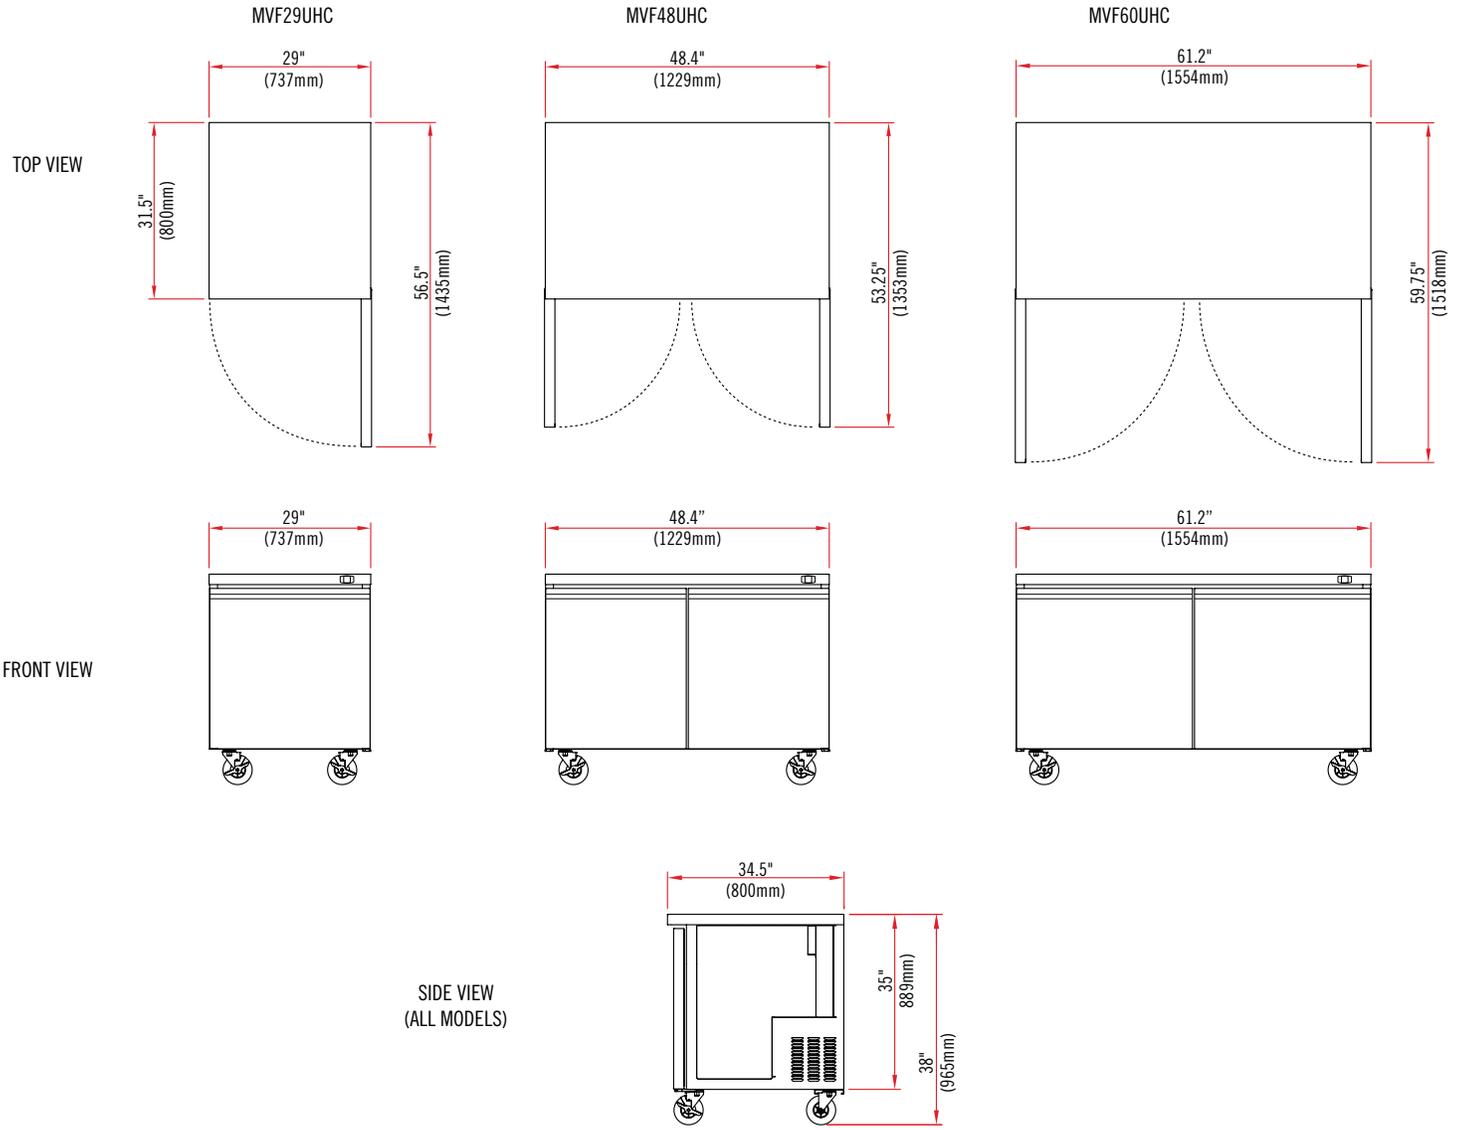

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MVF29UHC	29" x 31.5" x 38" (737 x 800 x 965 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7.8 Cu Ft (221 L)	0°F to 10°F (-18°C to -23°C)	2.5A	132 lbs (60 kg)	R290a 1.23 oz (35 g)	1 / 1	115V / 60Hz / 1Ph
MVF48UHC	48.4" x 31.5" x 38" (1229 x 800 x 965 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	14.1 Cu Ft (399 L)	0°F to 10°F (-18°C to -23°C)	4.7A	181 lbs (82 kg)	R-290a 2.12 oz (60 g)	2 / 2	115V / 60Hz / 1Ph
MVF60UHC	61.2" x 31.5" x 38" (1554 x 800 x 965 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	18.5 Cu Ft (524 L)	0°F to 10°F (-18°C to -23°C)	4.5A	212 lbs (96 kg)	R-290a 212 oz (60 g)	2 / 2	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements