

"ST4R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

14GA Top w/1.5" Riser - Stainless Steel Legs & Fixed Undershelf

FEATURES:

- 14GA Stainless Steel Top
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- Top Is Sound Deadened
- Reinforced With 1"x2" Channel Running Length Of Table
- 1-1/2" Stallion Edge On Front And 1-1/2" Backsplash On Rear With Side Edges 90 Degree Bend Down For Table Line-Up
- Stainless Steel Base With Fixed Undershelf
- Adjustable Bullet Feet
- Ships Welded

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Top: 14GA, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Shelf: 18GA Stainless Steel, (36" Wide Tables, 16 GA Lower Shelf)
- Legs: 1-5/8" Round O.D. , 16GA Tubular Stainless Steel
- Gussets: Stainless Steel
- Feet: 1" Adjustable Stainless Steel Bullet Feet



ST4R1.5-3048SSW

CERTIFICATIONS:



ACCESSORIES

DESCRIPTION

Drawer

Drawer Lock

Casters

Overshelves

Sinks


Pot Rack

"ST4R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SSW	46	1000	ST4R1.5-3024SSW	52	1000	ST4R1.5-3624SSW	61	1000
30"	ST4R1.5-2430SSW	52	1000	ST4R1.5-3030SSW	58	1000	ST4R1.5-3630SSW	70	1000
36"	ST4R1.5-2436SSW	58	1000	ST4R1.5-3036SSW	67	1000	ST4R1.5-3636SSW	81	1000
48"	ST4R1.5-2448SSW	72	1000	ST4R1.5-3048SSW	82	1000	ST4R1.5-3648SSW	100	1000
60"	ST4R1.5-2460SSW	85	720	ST4R1.5-3060SSW	98	720	ST4R1.5-3660SSW	120	720
72"	ST4R1.5-2472SSW	98	470	ST4R1.5-3072SSW	113	470	ST4R1.5-3672SSW	139	470
84"	ST4R1.5-2484SSW	119	1500	ST4R1.5-3084SSW	137	1500	ST4R1.5-3684SSW	168	1500
96"	ST4R1.5-2496SSW	132	1500	ST4R1.5-3096SSW	153	1500	ST4R1.5-3696SSW	188	1500
108"	ST4R1.5-24108SSW	145	1500	ST4R1.5-30108SSW	168	1500	ST4R1.5-36108SSW	209	1500
120"	ST4R1.5-24120SSW	158	1330	ST4R1.5-30120SSW	184	1330	ST4R1.5-36120SSW	229	1330
132"	ST4R1.5-24132SSW	171	1060	ST4R1.5-30132SSW	200	1060	ST4R1.5-36132SSW	248	1060
144"	ST4R1.5-24144SSW	184	830	ST4R1.5-30144SSW	216	830	ST4R1.5-36144SSW	268	830

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

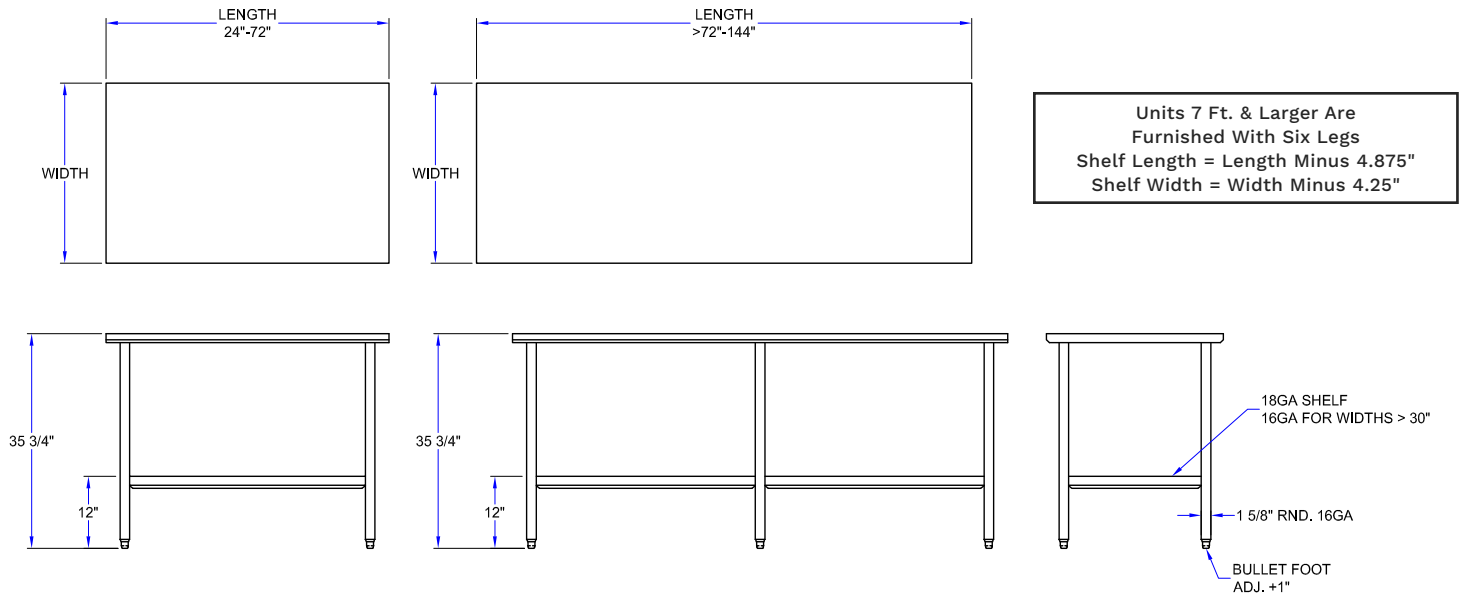

MODEL # STRUCTURE

1.5 = Ht. Of Riser w/Turndown

R = Top w/Riser

4 = 14GA Work Surface

ST = Stainless Steel Top



"ST4R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SSW	46	1000	ST4R1.5-3024SSW	52	1000	ST4R1.5-3624SSW	61	1000
30"	ST4R1.5-2430SSW	52	1000	ST4R1.5-3030SSW	58	1000	ST4R1.5-3630SSW	70	1000
36"	ST4R1.5-2436SSW	58	1000	ST4R1.5-3036SSW	67	1000	ST4R1.5-3636SSW	81	1000
48"	ST4R1.5-2448SSW	72	1000	ST4R1.5-3048SSW	82	1000	ST4R1.5-3648SSW	100	1000
60"	ST4R1.5-2460SSW	85	720	ST4R1.5-3060SSW	98	720	ST4R1.5-3660SSW	120	720
72"	ST4R1.5-2472SSW	98	470	ST4R1.5-3072SSW	113	470	ST4R1.5-3672SSW	139	470
84"	ST4R1.5-2484SSW	119	1500	ST4R1.5-3084SSW	137	1500	ST4R1.5-3684SSW	168	1500
96"	ST4R1.5-2496SSW	132	1500	ST4R1.5-3096SSW	153	1500	ST4R1.5-3696SSW	188	1500
108"	ST4R1.5-24108SSW	145	1500	ST4R1.5-30108SSW	168	1500	ST4R1.5-36108SSW	209	1500
120"	ST4R1.5-24120SSW	158	1330	ST4R1.5-30120SSW	184	1330	ST4R1.5-36120SSW	229	1330
132"	ST4R1.5-24132SSW	171	1060	ST4R1.5-30132SSW	200	1060	ST4R1.5-36132SSW	248	1060
144"	ST4R1.5-24144SSW	184	830	ST4R1.5-30144SSW	216	830	ST4R1.5-36144SSW	268	830

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.