### **GARLAND**

## Cuisine Series Heavy Duty Combination Top Range

Project	
Item	_
Quantity	
CSI Section 11400	
Approved	
Date	

#### Models

- C36-11R
- C36-11S
- C36-11C
- C36-11M



Model C36-11R 18" Front-Fired Hot Top and 18" Even-Heat Hot Top

#### Standard Features

- 37,500 BTU/h 18" (457mm) front-fired Hot Top
- 32,500 BTU/h 18" even-heat hot top
- Full-range valve control 3 per 18" (457mm) section
- Removable lids and rings on front fried hot top section
- · Stainless steel front and sides
- · Stainless steel front rail
- Stainless steel burner box
- 1-1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- · Porcelain oven interior
- R model 4 rack positions
- C model 3 rack positions
- R model 1 chrome plated rack
- C model 3 chrome plated racks
- $\bullet \ \ \text{Fully insulated oven interior} \\$
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°-260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

# Options & Accessories

- Stainless steel oven interior in lieu of porcelain oven interior NC
- Single or double deck high shelf or back riser
- Full-height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- · Stainless steel back
- Continuous plate shelf, 48" 72" for battery installations
- Gas shut-off valves 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Rear gas connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extra oven rack
- Extension for 1/9 pans

### Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model \_\_\_\_\_ with total BTU/h rating of \_\_\_\_\_ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

**Ovens** - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150°F (low) to 500°F (66°-260°C).

Front-Fired Hot Top - 18" (457mm) Section. 12,500 BTU/h each burner with three per section.

**Even-Heat Hot Top** - 18" (457mm) Section. 32,500 BTU/h each burner with one burner per section.

Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges suppled with casters must be installed with an approved restraining device.










## **GARLAND**°

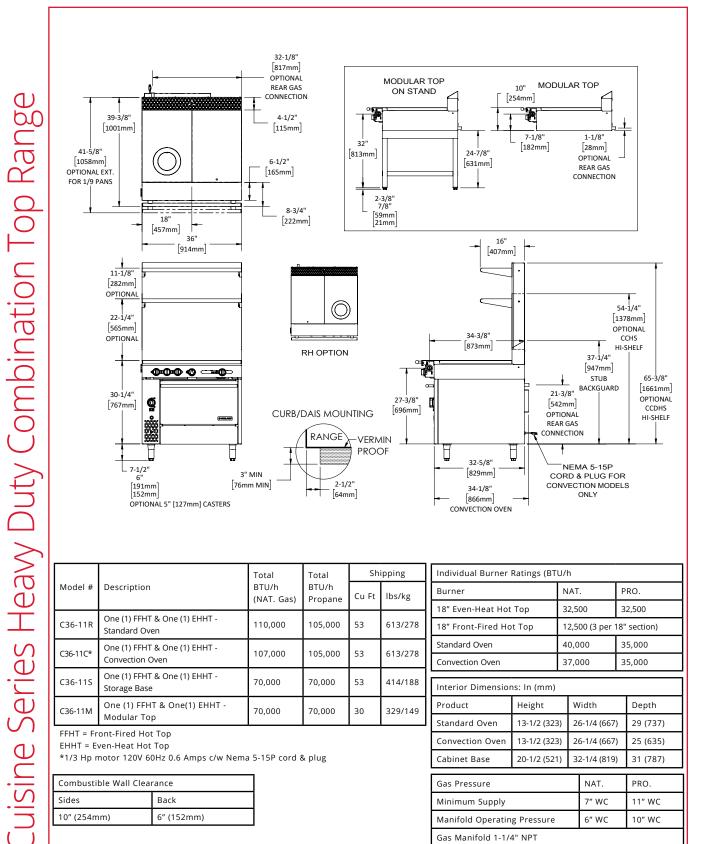

Model #	Description	Total BTU/h (NAT. Gas)	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C36-11R	One (1) FFHT & One (1) EHHT - Standard Oven	1 110 000 I 105		53	613/278
C36-11C*	C36-11C* One (1) FFHT & One (1) EHHT - Convection Oven	107,000	105,000	53	613/278
C36-11S	One (1) FFHT & One (1) EHHT - Storage Base	70,000	70,000	53	414/188
C36-11M	One (1) FFHT & One(1) EHHT - Modular Top	70,000	70,000	30	329/149

FFHT = Front-Fired Hot Top EHHT = Even-Heat Hot Top

\*1/3 Hp motor 120V 60Hz 0.6 Amps c/w Nema 5-15P cord & plug

Combustible Wall Clearance		
Sides	Back	
10" (254mm)	6" (152mm)	

Individual Burner Ratings (BTU/h			
Burner	NAT. PRO.		
18" Even-Heat Hot Top	32,500	32,500	
18" Front-Fired Hot Top	12,500 (3 per 18" section)		
Standard Oven	40,000	35,000	
Convection Oven	37,000	35,000	

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2 (323)	26-1/4 (667)	29 (737)
Convection Oven	13-1/2 (323)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

Gas Pressure	NAT.	PRO.
Minimum Supply	7" WC	11" WC
Manifold Operating Pressure	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

Garland reserves the right to make changes to the design or specifications without prior notice.

