



REVERSIBLE DOUGH SHEETER



Reversible Dough Sheeter, Floor Model, 20 Speeds, 19 11/16" Stainless Steel Rollers, Adjustable Roller Gap (1-40mm), Enamel Coated Stainless Steel Construction, Hand and Foot Belt Controls, 1 HP, CE & ETL Listed



PROJECT _____
ITEM NO. _____
NOTES _____
MODEL NUMBER: LMA620 , LMA624 , LMA630

FEATURES

- ☐ 20 Adjustable Speeds
- ☐ Fold Up Belts for Easy Storage
- ☐ Removable Arms
- ☐ Synchronized Belt System
- ☐ Adjustable Thickness from 1/32" - 1 1/2" (1 - 40 mm)
- ☐ Control Belt by Either Dual Hand or Foot Controls
- ☐ Emergency Stop
- ☐ 30 lb. Dough Capacity
- ☐ Thermal Overload Protection on Motor
- ☐ Easy to Remove & Adjust Scrapers
- ☐ Protective Guards with Motor Shut-Off Feature

CONSTRUCTION

- ☐ Polyurethane Belts
- ☐ Stainless Steel Rollers
- ☐ Stainless Steel Catch Pans (each side)
- ☐ Plastic Food Grade Reservoir (above rollers)
- ☐ Low Profile Casters for Mobility
- ☐ [2] Polyurethane Rolling Pins

OPTIONS & ACCESSORIES


- ☐ Stainless Steel Construction (Suffix I)
- ☐ Croissant Cutter for LMA630
 - For (3) 6 1/2" Wide Croissants (CPL001 & RCM001)
 - For (4) 5" Wide Croissants (CPL002 & RCM001)

CLEARANCES

- ☐ 6" (152mm) - All Sides (do not place anything below belt)

WARRANTY

- ☐ One Year Labor & Two Year Parts

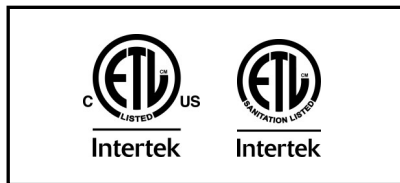

Model	Crated Weight	Overall Dimensions			Conveyor Dimensions		Electrical System		NEMA
		W	D	H	D	W	Volts	Amps	
LMA620	700 (318)	91.25" (2318)	39.48" (1003)	45.74" (1162)	22.83" (580)	78.74" (1000 x 2)	120	8.3	5-15P
LMA624	815 (370)	107" (2718)	39.48" (1003)	45.74" (1162)	22.83" (580)	94.48" (1200 x 2)	120	8.3	5-15P
LMA630	900 (409)	130.74" (3321)	39.48" (1003)	45.74" (1162)	22.83" (580)	118.11" (1500 x 2)	120	8.3	5-15P

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION B | 6/3/2025

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca







PROJECT

ITEM NO.

NOTES


MODEL NUMBER: LMA620 , LMA624 , LMA630

DRAWINGS

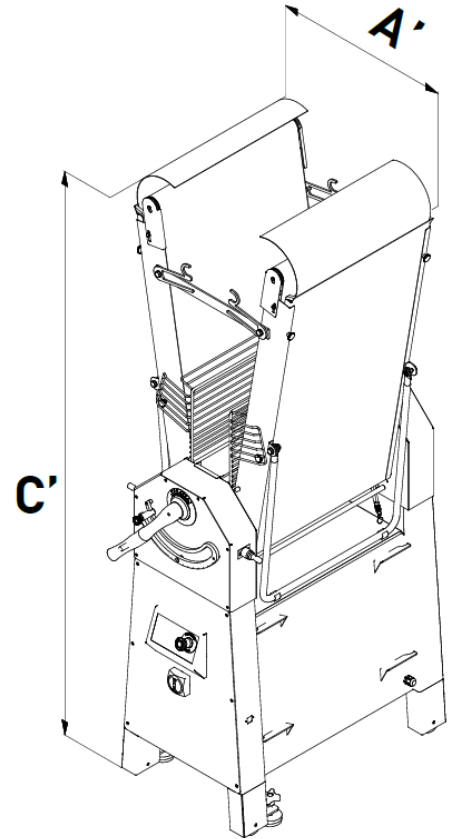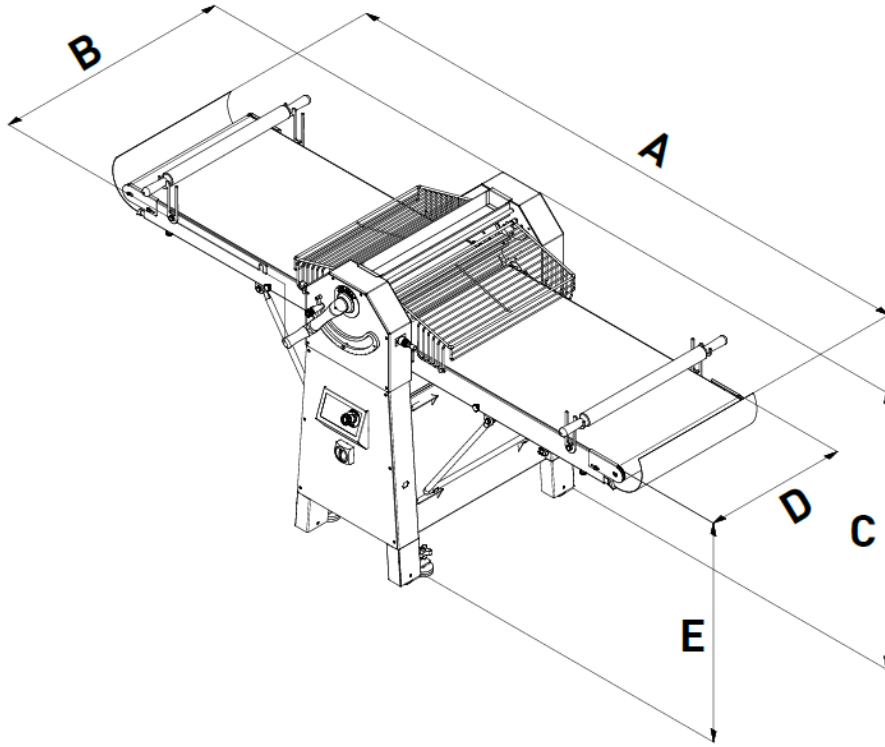

	LMA620	LMA624	LMA630
A	90 ⁹ / ₁₆ "	106 ⁵ / ₁₆ "	129 ¹⁵ / ₁₆ "
A'	26 ¹⁵ / ₁₆ "	35 ⁷ / ₁₆ "	34 ¹⁵ / ₁₆ "
B	40 ³ / ₈ "	40 ³ / ₈ "	40 ³ / ₈ "
C	46 ¹ / ₁₆ "	46 ¹ / ₁₆ "	46 ¹ / ₁₆ "
C'	72 ¹³ / ₁₆ "	80 ¹¹ / ₁₆ "	92 ¹ / ₂ "
D	23 ⁵ / ₈ "	23 ⁵ / ₈ "	23 ⁵ / ₈ "
E	36 ¹ / ₄ "	36 ¹ / ₄ "	36 ¹ / ₄ "

NEMA 5-15 PLUG



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION B | 6/3/2025

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

