



Job: _____ Item No.: _____
 Notes: _____
 Model Number: PH125 PH128
 PH129

Heated Transport Carts

SPECIFICATIONS



PH128

DESCRIPTION

PH Series Heated Food Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a top-mounted heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include welded, turned-in seam construction, insulated top, sides and bottom, recessed door, and heavy-duty casters.

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with recessed door and flush-mounted transport latch. Top-mounted, convection heater. Removable stainless steel tray racks with fixed channel tray slides on 2.75" centers for 12"x20"x2.5" steam table pans. Polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1000 watts, 8.3A, six-foot 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

FEATURES

- Top mounted, 1000 watt, convection heating system
- Dial thermometer with remote sensing bulb
- Capable of heating to 200°F (93°C); pre-heat to 160°F (71°C) in approximately 25 minutes
- All welded, turned-in seam, stainless steel construction
- 14 ga. stainless steel full depth bolsters; 1"x1" perimeter channel supports
- Flush mounted, double panel door with 1" thick high-density fiberglass insulation, gasketless design
- Welded-on, stainless steel butt hinges with 3/8" pin
- Flush mounted sliding latch
- All-swivel rubber casters; two fitted with brakes
- Removable tray racks with fixed tray slides on 2.75" centers
- Accommodates 12"x20"x2.5" steam table pans

OPTIONS AND ACCESSORIES

- Menu card holder
- Rack hold down device
- Heater hold down device
- Tamper-resistant fasteners
- Transport latch with padlock hasp
- Alternate electrical configuration
- Alternate caster sizes and types
- 4" legs in lieu of casters
- Wrap-around bumper

CERTIFICATIONS



WARRANTY

One-year warranty for parts and labor.



CARTER-HOFFMANN
 1551 McCormick Avenue, Mundelein, IL 60060
 847.362.5500 • 800.323.9793
 www.carter-hoffmann.com

Follow us



Form
 PH129 Series_0821






Job: Item No.:
 Notes:
 Model Number: PH125 PH128
 PH129

Heated Transport Carts

SPECIFICATIONS

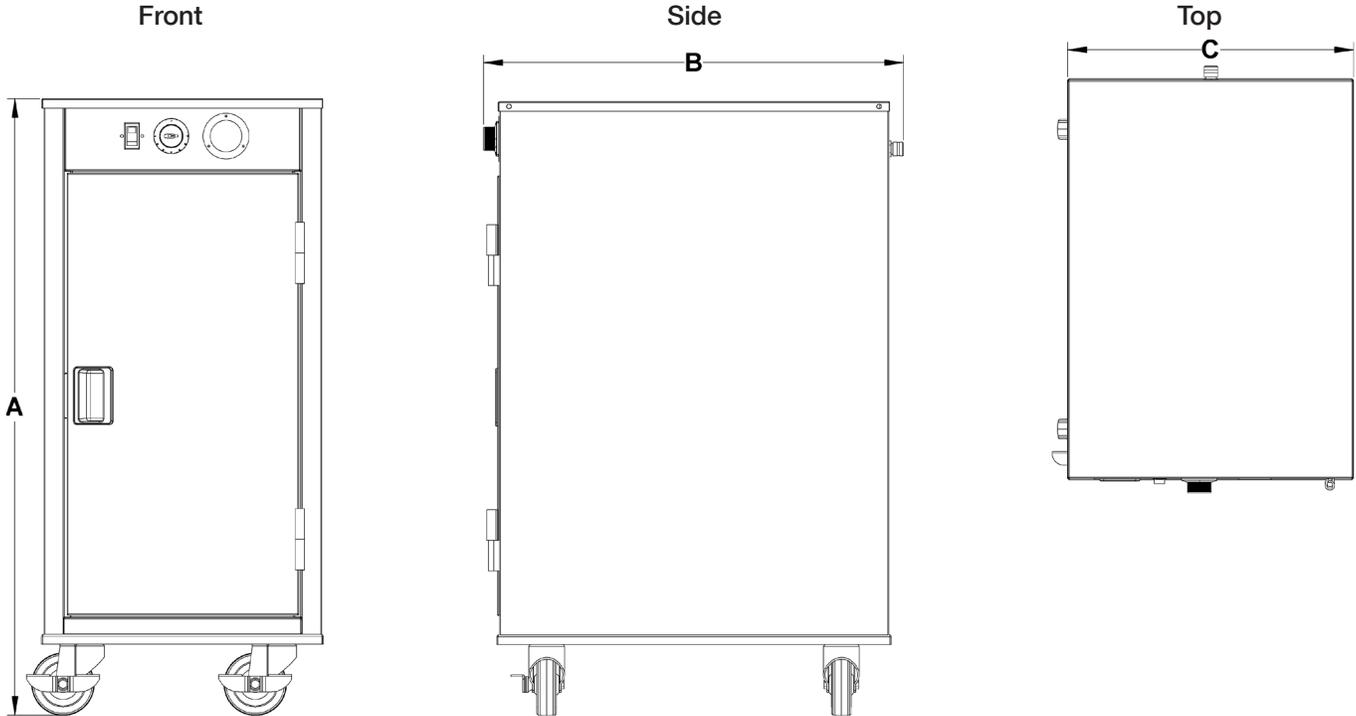

CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

ELECTRICAL DATA

Single electrical connection.
 120 Volts, 1000 Watts, 8.3 Amps, 60Hz, single phase.
 Six-foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P



Model Number	Pan Capacity*	Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
	12"x20"x2.5"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
PH125	5	20 ^{1/2}	521	28 ^{1/2}	724	25 ^{1/8}	638	17 ^{7/8}	454	3	76	110	50
PH128	8	23 ^{5/8}	600	37 ^{3/4}	946	25 ^{1/8}	638	17 ^{7/8}	454	4	102	128	58
PH129	9	26	660	40 ^{1/2}	1029	25 ^{1/8}	638	17 ^{7/8}	454	4	102	134	61

*Pan spacing at 2.75" (89mm).

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.