



Project _____ Item# _____

UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU REFRIGERATORS



MODEL RTR-75-SS-2G-2G
SHOWN WITH OPTIONAL GLASS DOORS

MODEL NO.	DESCRIPTION
☐ RIR-30-SS-1S-L	30" Wide, One Door
☐ RIR-375-SS-1S-L	37.5" Wide, One Extra Wide Door
☐ RIR-60-SS-2S-L	60" Wide, Two Doors
☐ RIR-68-SS-2S-L	68" Wide, Two Doors
☐ RIR-75-SS-2S-L	75" Wide, Two Extra Wide Doors
☐ RIR-90-SS-3S-L	90" Wide, Three Doors

OPTIONS	MODEL NO. MODIFICATION
☐ Glass Doors	Change "S" to "G"
☐ Roll-Thru	Change "RI" to "RT"

STANDARD FEATURES

- Stainless steel exterior
- Stainless steel interior
- Heavy-gauge, reinforced stainless steel floor
- Standard width models for end-loading racks
- Extra-wide models for side-loading racks and dollies
- Self-closing door hinges with stay-open feature at 120 degrees (standard door hinging: Single door units hinged on left; Two door units, left door hinged on left, right door hinged on right; Three door units, left door hinged on left, center and right doors hinged on right. Other configurations available)
- Full-length recessed Unigrip door handle with security heavy-duty built-in cylinder lock on solid doors
- Automatic interior light (solid doors only; switch concealed in door hinge)
- Stainless steel entrance ramps (removable)
- Stainless steel cart guides and bumpers
- Condensate heaters around door openings
- Three hinges per door
- Snap-in magnetic door gaskets
- Expansion valve refrigeration system
- Top-mounted compressor
- Digital thermometer
- R-404a refrigerant for superior temperature recovery and pulldown
- Condensate evaporator
- Impact-resistant PVC breaker strip
- 5 year compressor, 5 year parts, 1 year labor warranty

OPTIONS & ACCESSORIES

- ☐ Modifications to permit storage of racks up to 72" in height (Change "-L" suffix to "-H")
- ☐ Configuration for remote applications (Add "-X" suffix)
- ☐ Stainless steel back
- ☐ Stainless steel bottom
- ☐ Glass doors
- ☐ Heated glass doors
- ☐ Door locks for glass doors
- ☐ Correctional facilities package
- ☐ Water-cooled condensing unit



UTILITY REFRIGERATOR

Manufacturers of Quality Refrigeration Equipment Since

1931

(818) 764-6200 Fax (818) 764-6211

www.utilityrefrigerator.com

PROUDLY MADE IN THE USA






Project _____ Item# _____

UTILITY REFRIGERATOR

ROLL - IN / ROLL-THRU REFRIGERATORS

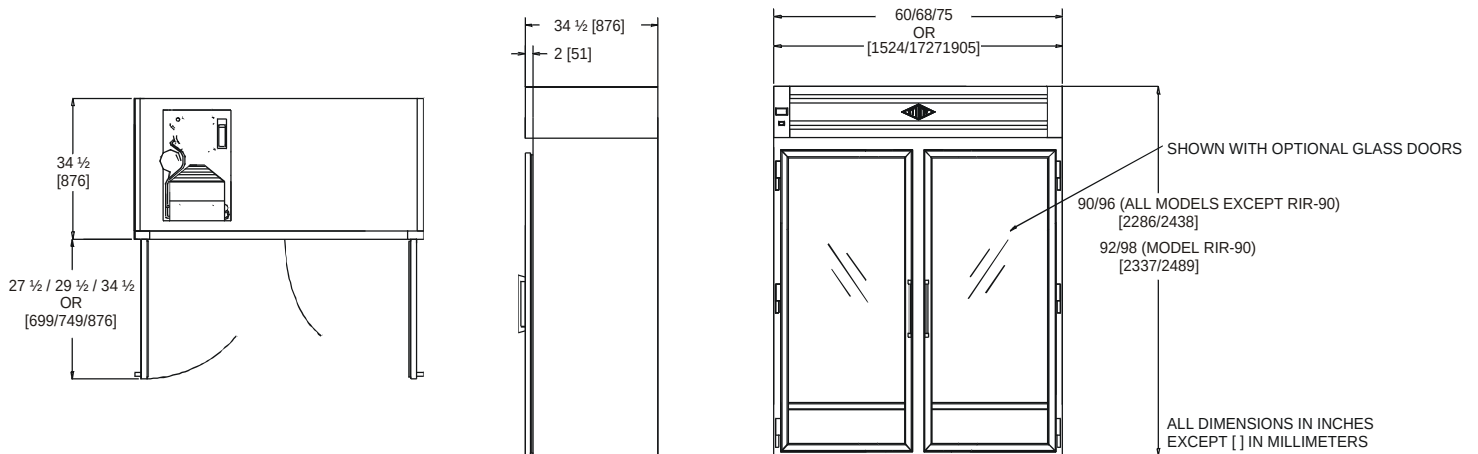

PRODUCT DATA (DATA IS FOR STD. MODELS; OPTIONS MAY CHANGE SPECIFICATIONS)	RIR-30	RIR-375 Extra Wide Door	RIR-60	RIR-68	RIR-75 2 Extra Wide Doors	RIR-90
Width (overall)	30"	37.5"	60"	68"	75"	90"
Depth (overall)	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"	34 1/2"
Height	90"	90"	90"	90"	90"	92"
Height (with optional modification)	96"	96"	96"	96"	96"	98"
Depth (door open 90 deg.)	62"	69"	62"	66"	69"	62"
Door opening (net width)	23 1/4"	30 3/4"	23 1/4"	27 1/4"	30 3/4"	23 1/4"
Cart width, maximum	23"	30 1/2"	23"	27"	30 1/2"	23"
Cart height, maximum	66"	66"	66"	66"	66"	65"
Cart ht., max. (with optional modification)	72"	72"	72"	72"	72"	72"
Cart depth, maximum	29"	29"	29"	29"	29"	29"
Voltage (dedicated circuit required)	115	115	115	115	115	115
Amperage (with solid doors; consult factory for glass door amperages)	10.1	10.2	15.0	15.2	15.8	24.5
NEMA plug configuration	5-15P	5-15P	5-20P	5-20P	5-20P	No Cord
Ship weight (lbs.)	605	740	1010	1102	1184	1220
Ship volume (cu. ft.)	90	110	141	159	205	240
Crated dimensions (100"/106"H)	33 1/2"W x 38 1/2"D	41"W x 38 1/2"D	63 1/2"W x 38 1/2"D	71 1/2" W x 38 1/2" D	78 1/2"W x 38 1/2"D	93 1/2"W x 38 1/2"D

SPECIFICATIONS

Cabinet Exterior - Exterior sides are constructed of heavy gauge stainless steel. Exterior back and bottom are constructed of heavy gauge galvanized or optional stainless steel. Stainless steel top-mount housing. Exterior digital temperature control. Cabinet body is 100% CFC free, foamed-in-place polyurethane insulation.

Cabinet Interior - All heavy gauge stainless steel construction with radius corners. Stainless steel cart guides, bumpers, and entrance ramps. Automatic interior light with concealed actuator (solid doors only; manual on/off switch on glass door models). Door openings protected by impact-resistant PVC breaker strip. Optional cabinet modification allows storage of carts up to 72" high.

Doors - All stainless steel construction with magnetic snap-in gasket. Door perimeters have built-in energy saving condensate heaters. Doors are equipped with self-closing lift off cam hinges for easy door removal in order to prevent damage to door during installation. Doors stay open at 120 degrees for easy access to interior. Optional glass doors have two panes for maximum refrigeration efficiency. The optional heated glass prevents condensation in humid environments. Standard hinging is left door hinged left, center and right doors hinged right (other configurations available-please specify.)

Refrigeration - Top-mounted fully hermetic compressor with R-404a refrigerant. Thermostatic expansion valve for superior performance and efficiency, faster temperature recovery, shorter running time, and lower energy consumption. Integral condensate evaporator. Pressure control prevents compressor burnout in case of loss of refrigerant.

In line with its policy to continually improve its products, Utility Refrigerator reserves the right to change materials and specifications without notice.



UTILITY IS PROUDLY MADE IN THE USA

RIRSC-CS



UTILITY REFRIGERATOR

Manufacturers of Quality Refrigeration Equipment
Since 1931
12160 Sherman Way North Hollywood, CA 91605
(818) 764-6200
www.utilityrefrigerator.com