



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

## MVI115F SELF-CONTAINED ICE MACHINE

MODEL: ☐ MVI115F



The MVI115F self-contained, air-cooled ice machine is perfect for any free-standing or built-in application. Each unit features a self-contained storage bin and a durable, easy to clean stainless steel and black plastic trim exterior. The easy-to-use controls, front-breathing design with vertical evaporator and proven ice making technology will deliver years of reliable ice production.

### FEATURES AND CONSTRUCTION

- Stainless steel exterior with black plastic trim
- Air cooled compressor
- Programmable, solid state, digital electronic control system.
- Built-in self cleaning mode
- Automatic shut off / overflow protection
- Includes scoop
- Polyethylene storage bin liner for improved sanitation

### DAILY ICE PRODUCTION

Air Temp 70°F (21°C) / Water Temp 50°F (10°C)

MVI115F ..... 120 lbs (54.4 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

MVI115F ..... 97 lbs (44 kg)

### ICE BIN STORAGE CAPACITY

MVI115F ..... 35 lbs (15.9 kg)

### OPERATING REQUIREMENTS

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C)

Water Temperature Range ..... 41° to 90°F (5° to 32°C)

Water Usage per 100 lbs of ice..... 22 Gallons (83.3L)

Water Supply Line Connection ..... 3/8" FPT

Water Pressure Range:

Min PSI..... 15                      Max PSI ..... 75\*

Min Bar ..... 1.0                      Max Bar..... 5.5

\*Above 75 PSI requires a regulator

Energy Consumption per 100 lbs of ice:


MVI115F ..... 11.3 kWh/100 lbs

### ELECTRIC

120V / 60Hz / 1Ph

International voltage available

6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

### 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 12



Intertek

Certified to ANSI UL 563



Zero Ozone Depletion Potential


### MAXX ICE WARRANTY (USA / CANADA)

1 Year Compressor Only Warranty; 6 Months Parts & Labor


For more information, contact:

TechnicalServices@TheLegacyCompanies.com or 877.368.2797


FRONT VIEW

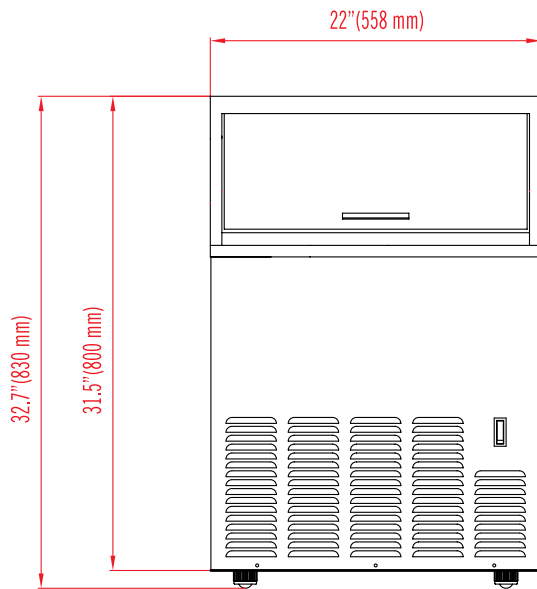


SIDE VIEW

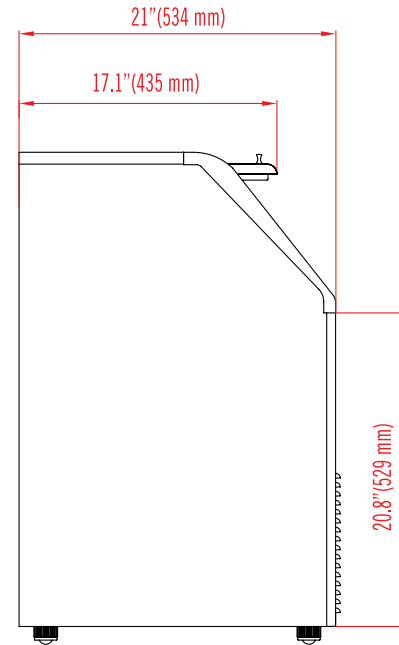

REAR VIEW

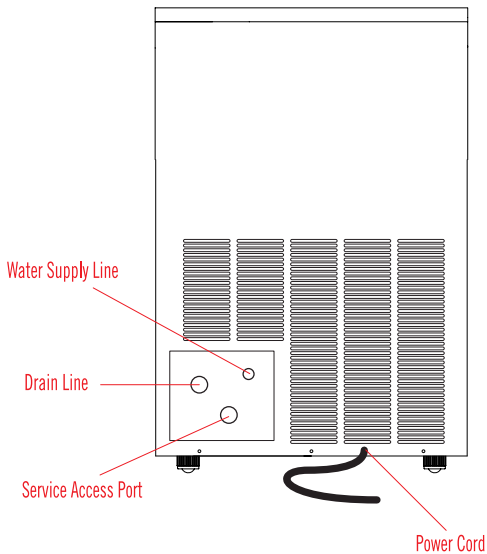

FULL DICE CUBE (ACTUAL SIZE)

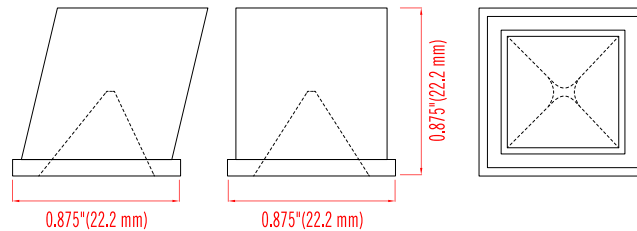

MODEL	EXTERNAL DIMENSIONS	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE CAPACITY	NET WEIGHT / SHIPPING WEIGHT	AMP DRAW (NOMINAL/MAX)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MVI115F	22" x 21" x 32.7" (558 x 534 x 830 mm)	120 lbs (54.4 kg)	35 lbs (15.9kg)	110 lbs (50 kg) 129 lbs (58.5 kg)	7.5A / 11.8A	R-134a 8.47oz (240g)	115V / 60Hz / 1Ph

## INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended