



MODEL NUMBERS - SDPR48

## SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR



SDPR48 Shown



SDPR48 Shown

|           |  |
|-----------|--|
| JOB       |  |
| AREA      |  |
| ITEM NO.  |  |
| MODEL NO. |  |

| MODELS |
|--------|
| SDPR48 |

### KEY PRODUCT FEATURES AND BENEFITS

- Remote back bar refrigerators allow customers to mount the compressor in an alternate location, ideal for remote servicing and noise isolation
- Self-closing sliding glass door keep narrow profile in tight bar environment
- Easy access from both sides with pass-thru sliding doors
- All stainless steel interior with stainless steel or black top for long life durability and easy to clean hygienic storage
- 2" Foamed-in-place insulation provides energy savings using Ecomate™, a blowing agent that has zero-ozone depletion and zero global warming potential
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage

#### Additional Features:

- Choose between all stainless exterior or all black option featuring Cerakote finished black handles and door locks.
- Choose between 6000K white LED lighting or cool blue display lighting
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty
- Made in the USA

#### OPTIONS

| MODEL NOS. | DESCRIPTION  |
|------------|--------------|
| SDPR48     | 4-Door Model |

Form No. SDPR.1  
Rev. 04.10.25



## SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

| MODEL NUMBERS                         |                                 | SDPR48                         |
|---------------------------------------|---------------------------------|--------------------------------|
| NUMBER OF DOORS                       |                                 | 4                              |
| EXTERIOR CABINET DIMENSIONS           | Length - in. (mm)               | 48 (1219)                      |
|                                       | Depth - in. (mm)                | 24 $\frac{1}{16}$ (678)        |
|                                       | Height - in. (mm)               | 34 $\frac{1}{16}$ (878)        |
| INTERIOR CABINET DIMENSIONS           | Length - in. (mm)               | 44 (1118)                      |
|                                       | Depth - in. (mm)                | 18 $\frac{3}{4}$ (476)         |
|                                       | Height - in. (mm)               | 28 $\frac{1}{2}$ (724)         |
| INTERNAL VOLUME Net. Cu. Ft. (Litres) |                                 | 14.1 (399.27)                  |
| PRODUCT CAPACITY                      | CASE PACKED - 12 OZ. BOTTLE/CAN | 314/515                        |
|                                       | STAGGERED - 12 OZ. BOTTLE/CAN   | 339/552                        |
| SHIPPING WEIGHT Lbs. (kg.)            |                                 | 274 (124)                      |
| ELECTRICAL SPECIFICATIONS             | Electrical Supply               | 120 VAC/60 Hz/1 Ph             |
|                                       | Running Load Amps               | 1.6                            |
|                                       | Electrical Connection           | Hard wired                     |
|                                       | Defrost Initiation              | Automatic                      |
|                                       | Defrost Type                    | Off cycle                      |
|                                       | Lighting Type                   | LED                            |
| REFRIGERATION SPECIFICATIONS          | Expansion Device                | TXV                            |
|                                       | Evaporator Capacity-Remotes     | 1900 Btu/Hr @ 20° F Evaporator |
|                                       | Remote Refrigerant Options      | R134a & R404a                  |
| PLUMBING                              | Floor Drain Included            | Yes                            |
|                                       | Evaporator Condensate           | Field plumbed                  |

Wine Temperature refrigerators do not carry NSF Rating for open food storage.

Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.

- Remote units are made to order and non-returnable





# PERLICK®




MODEL NUMBERS - SDPR48

## SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

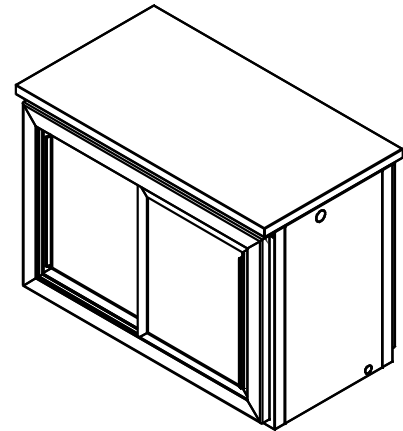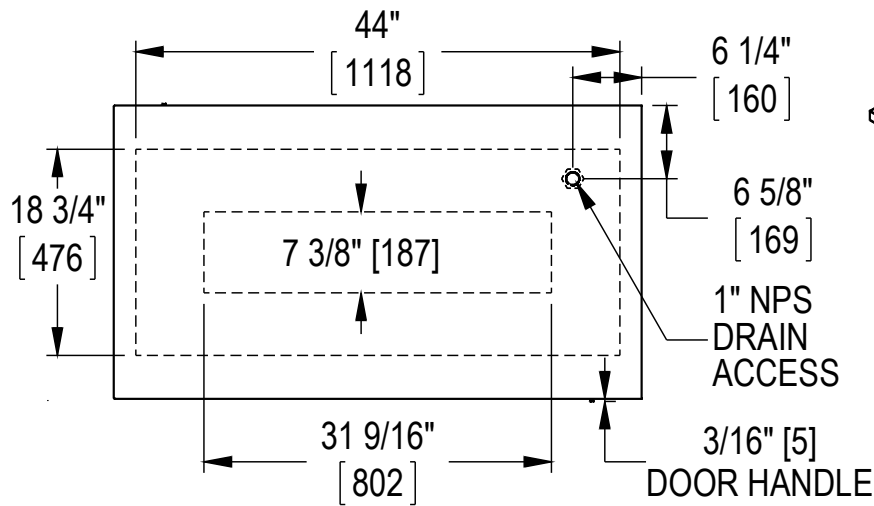

**SDPR48**

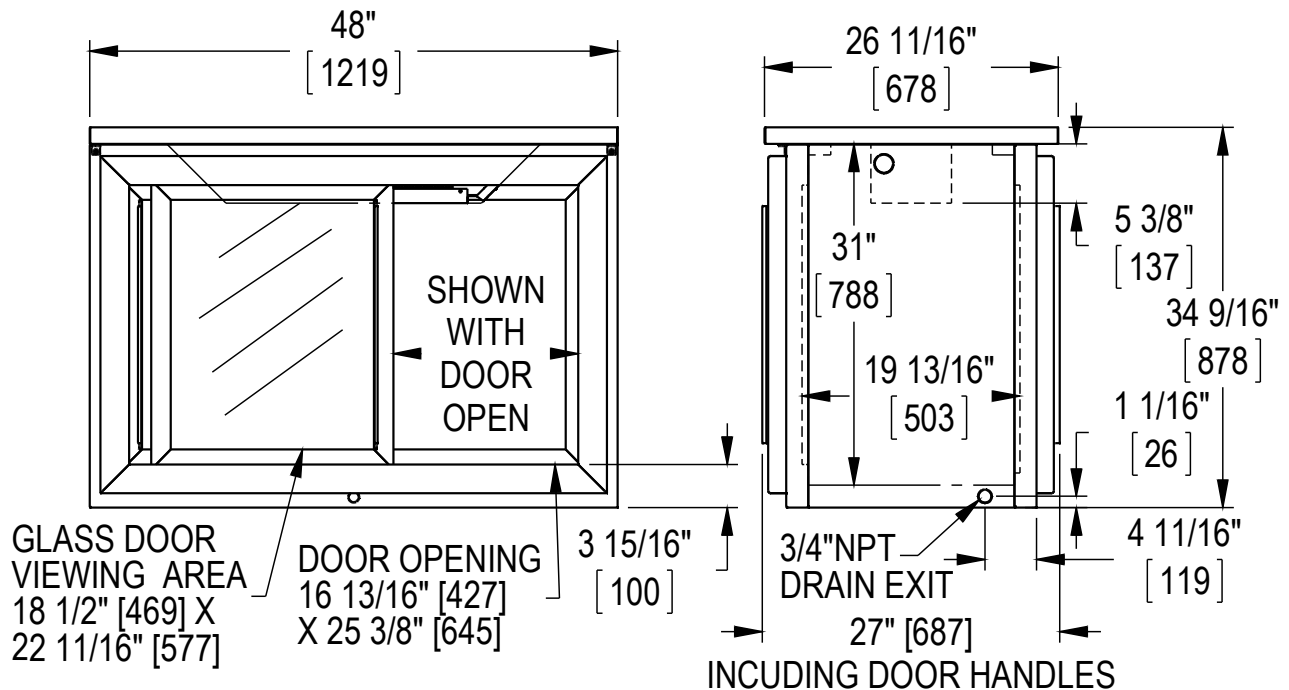

### WARNING: California Prop 65 Notice

These products may expose you to chemicals including Chromium, which are known to the state of California to cause cancer and birth defects or other reproductive harm. For more information on whether a product in this list contains these chemicals, please refer to the specific product page at [perlick.com](http://perlick.com). Or to find out more about Prop 65, go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov).

Form No. SDPR.1  
Rev. 04.10.25