



SPEC SHEET

24 In. Commercial Hood-Type High-Temperature Dishwasher, 40 Racks/Hour, 90-Second Cycle, 208V in Stainless-Steel


Model: KM-HTD-HT

FEATURES

- **Up to 40 Racks Per Hour:** High-capacity door-type design supports fast dishwashing throughput for busy commercial foodservice operations.
- **High-Temperature Sanitizing:** Designed for high-temperature washing and sanitizing to meet the demands of professional kitchens.
- **Four Wash Cycle Options:** Select from 90-, 120-, 180-, or 600-second cycles to accommodate different loads and cleaning requirements.
- **Integrated Booster Heater and Electric Tank Heat:** Built-in heating systems support the elevated water temperatures required for high-temperature operation.
- **Digital Temperature Display:** Front-mounted digital controls provide convenient access to cycle settings and operating temperature information.
- **Low Water Consumption:** Uses approximately 0.66 gallons of water per cycle to support efficient commercial ware washing.
- **Generous 16.5-Inch Loading Height:** Accommodates a variety of plates, cookware, and other commercial kitchen wares.
- **Durable Stainless-Steel Construction:** Features a 304 stainless-steel wash tank, stainless-steel nozzles, and durable stainless-steel exterior construction.



CLOSE UP IMAGES



Technical Specs

Dimensions & Weight

Length without Handle	24.25 in.
Length with Handle	28.2 in.
Width without Handle	29 in.
Width with Handle	31.75 in.
Height Closed	55.5 in.
Height Opened	73.8 in.
Weight	188.49 lbs.
Interior Width	23 in.
Interior Height	29 in.
Interior Depth	23 in.
Rack Size	20x20 in.

Electric & Certifications

Voltage	240
Wattage	9860
Amps	35
Hertz	60
Phase	3
Power Cord Included	No
Electrical Installation Type	Hardwired
Energy Consumption	86373.6 kWh/Year
Certifications	CSA Certified for Safety and Sanitation




Capacity

Number of Cycles	4
Cycles	90s/120s/180s/600s
Racks Per Hour	40
Tank Capacity	6.9 Gal.
Water Consumption Per Cycle	.66 Gal.

Features & Materials

Control Location	Exterior Front
Control Type	Digital
Temperature Range	Wash Temp.: 131°F-140°F Rinse Temp.: 180°F-194°F
Digital Led Display	Yes
Installation Type	Freestanding, Straight Through
Interior Material	Stainless-Steel 304
Exterior Material	Stainless-Steel 201
Gauge of Stainless Steel	22
Color Finish	Stainless-Steel
Door Handle Color	Stainless-Steel
Door Style	Hood Type
Noise	58 dB
Legs Adjustable	Yes, .8 in.
Number of Feet	4
Feet Material	Polyamide
Commercial / Residential	Commercial
High Temperature Sanitizing	Yes
Water Pump	710w
Rinsing Pump	150w
Water and Drain Lines Included	Yes
Dishwasher Racks	2: 1 Peg and 1 Flatware
Electric Tank Heat	Yes
Diameter of Water Line Connection	.75
Diameter of Drain Line Connection	1.25

Plan View

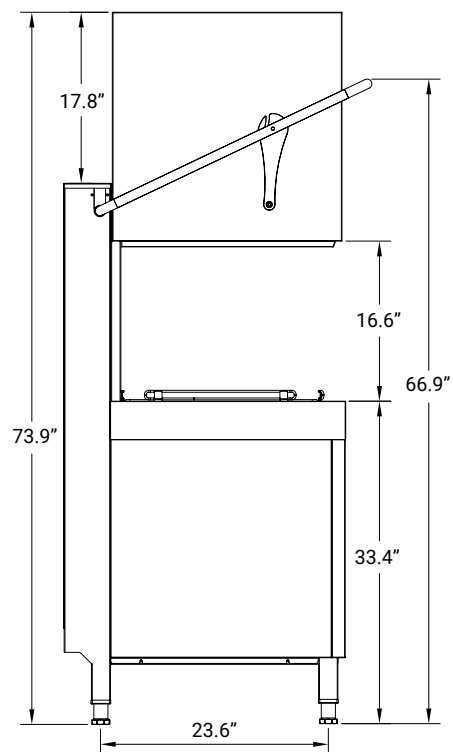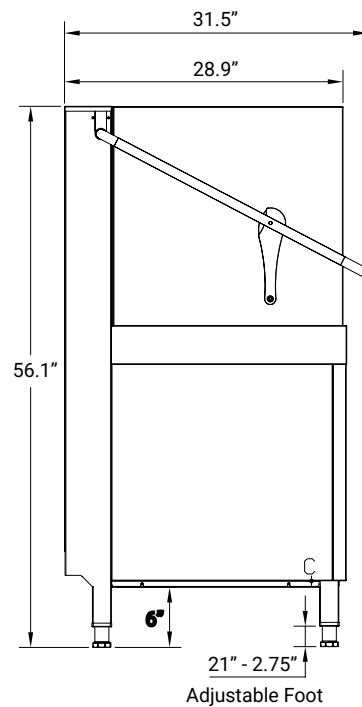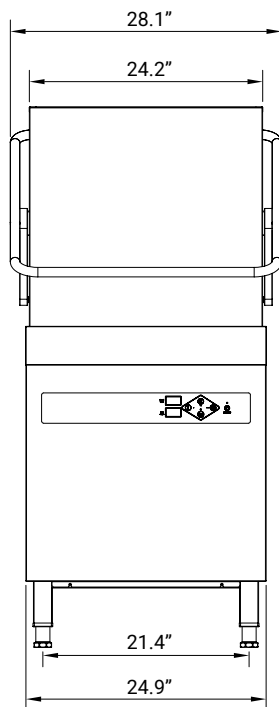

718-576-6342
info@koolmore.com

CERTIFICATIONS

