REACH-INS SERIES ★

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375'' H





MODEL NO.	DESCRIPTION	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	HP/BTUs	POWER CORD	EST. SHIP WEIGHT
GR19BM	1 Door	26.5''	33.0"*	78.375"	115	10.2	1/3	5-15P	466
GR42BM	2 Doors	52.25''	33.0"*	78.375"	115	11	1/3	5-15P	675
GR65BM	3 Doors	78.0''	33.0"*	78.375"	115	13.8	1/2	5-20P	976
GR88BM	4 Doors	103.75''	33.0"*	78.375"	115/208-230	6.40/7.10	3/4	L14-20P	1184

SC = Self Contained R = Remote B = Black S = Stainless Steel LED = LED lighting

*Depth without Handle

831 East Cayuga St.
Philadelphia, PA 19124 USA
Phone: 1-800-344-8222
Fax: (215) 969-4890
E-Mail: sales@howardmccray.com
Website: www.howardmccray.com

092026 - Revision Date: Sept 2026

REACH-INS SERIES

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375”

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

INTERIOR

- White aluminum ends and rear (optional black and SS)
- White Aluminum floors (optional black and SS)
- Aluminum evaporator fan housing
- 4 Heavy duty epoxy coated shelves per door

REFRIGERATION

- Bottom mounted condensing unit
- Electronically controlled with audio alarm
- Automatic air defrost
- ECM evaporator fan motors
- Copevap system
- Remote: Solenoid valve (Required)
- Dixell controller

EXTERIOR

- White aluminum ends and front (optional black and SS)
- Doors - chrome finish (white and stainless steel)
- Doors - black finish (black)

CONSTRUCTION

- CUL/UL Classified to NSF/ANSI 7
- Heavy Duty Construction
- Foamed in place CFC free foam
- Removable front grille for easy servicing
- 1, 2, 3, 4 Door models available
- Heavy duty edge mounted hinges

LIGHTING

- Vertical LED light strips - standard
- 1 Dr = 2 LED light strips
- 2 Dr = 3 LED light strips
- 3 Dr = 4 LED light strips
- 4Dr = 5 LED light strips

ELECTRICAL REQUIREMENTS

- 10' Cord and plug
- (Self Contained only)
- CUL/UL listed
- 1, 2, 3 Door units 115V
- 4 Door units 115V/208-230V

OPTIONAL ACCESSORIES

- ☐ Door swing change (left or right)
- ☐ Custom, laminate, or paint exterior
- ☐ Door locks
- ☐ Cantilever shelves
- ☐ Digital thermometer
- ☐ Price tag molding

REACH-INS SERIES

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375”

TECHNICAL DATA

Model No.	SC (Self contained) R (Remote)	GR19BM R-GR19BM	GR42BM R-GR42BM	GR65BM R-GR65BM	GR88BM R-GR88BM
Length		26.5"	52.25"	78.0"	103.75"
Height		78.375"	78.375"	78.375"	78.375"
Depth without handle (Dimensions are +/- 1/4")		33.00"	33.00"	33.00"	33.00"
Operating temperature		35°F to 39°F	35°F to 39°F	35°F to 39°F	35°F to 39°F
System type		Expansion valve	Expansion valve	Expansion valve	Expansion valve
Compressor size HP	SC	1/3	1/3	1/2	3/4
Refrigration system		Electronic controlled	Electronic controlled	Electronic controlled	Electronic controlled
Defrost per day (24 hours)	Air Defrost R	Electronic controlled 2 per day	Electronic controlled 2 per day	Electronic controlled 2 per day	Electronic controlled 2 per day
BTU's at +20°F Evap. Temp.	R	1300	1900	2600	3000
Voltage	SC	115	115	115	115/208-230
Amperage	SC	10.2	11	13.8	6.40/7.10
Voltage	R	115	115	115	115
Amperage, lights, fans	R	2.6	3.4	4.1	6.4
Cord and plug	SC R	5-15P NO	5-15P NO	5-20P NO	L14-20P NO
Exterior color		W, B, S	W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S	W, B, S
Doors size		(1) 23.75" x 58.25"	(2) 23.75" x 58.25"	(3) 23.75" x 58.25"	(3) 23.75" x 58.25"
Total shelves		4	8	12	16
Shelf size		(4) 21.25" x 22.5"	(8) 22.75" x 21.50"	(8) 22.75" x 21.50" (4) 25.00" x 21.50"	(8) 22.75" x 21.50" (8) 25.00" x 21.50"

IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

IMPORTANT NOTE

- Cases are designed to operate at **75 degrees Fahrenheit and 55% relative humidity**
- Drain is required; check your local building codes for connection requirements
- This unit is intended for maintaining cold product temperatures, but not for making warm items colder
- Specification subject to change without notice


REACH-INS SERIES

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375”


DRAWINGS

TOP VIEW


1 DOOR

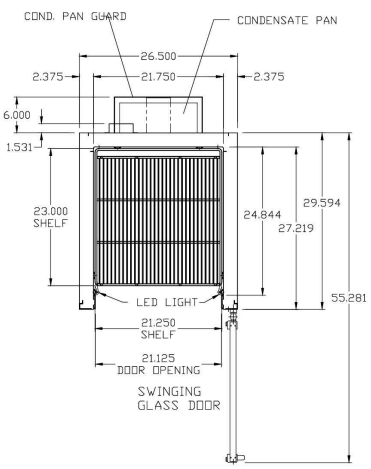


2 DOORS

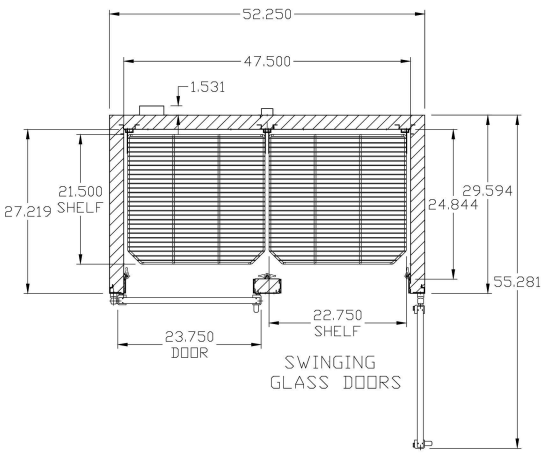

3 DOORS

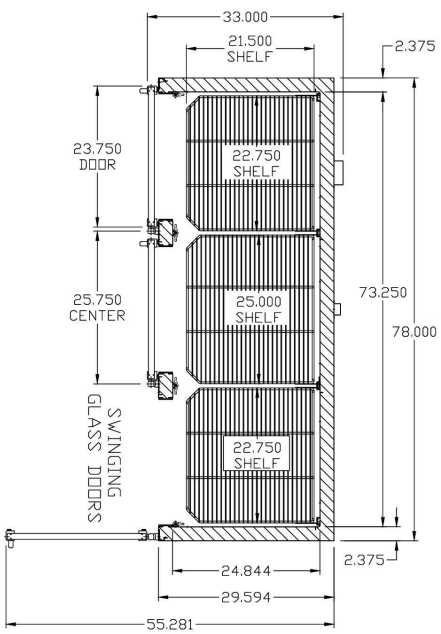

4 DOORS

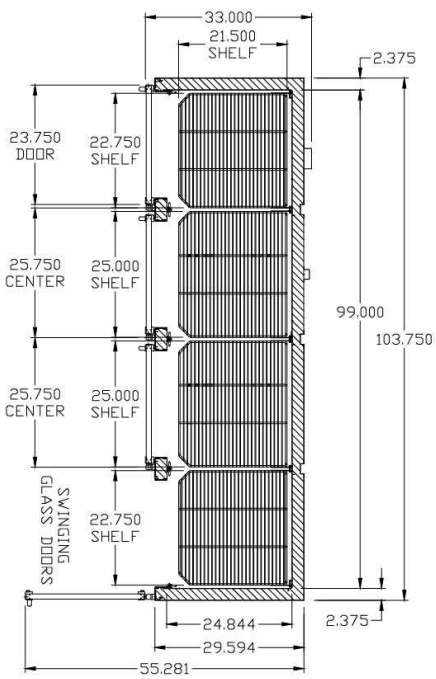


REACH-INS SERIES

GR SERIES - HINGED GLASS DOORS
BOTTOM MOUNT REFRIGERATORS - 78.375”


DRAWINGS

FRONT VIEW

SWINGING GLASS DOORS

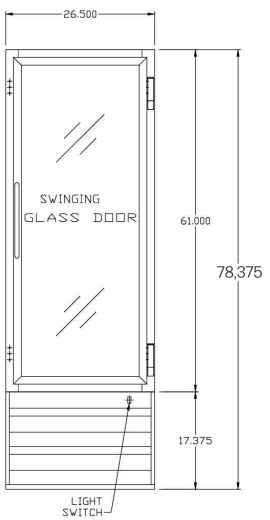



1 DOOR

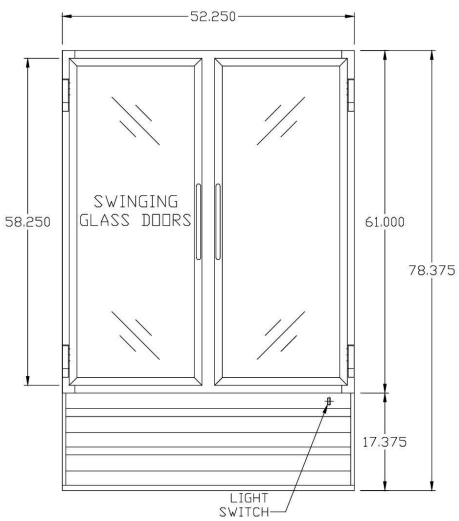


2 DOORS

SIDE VIEW

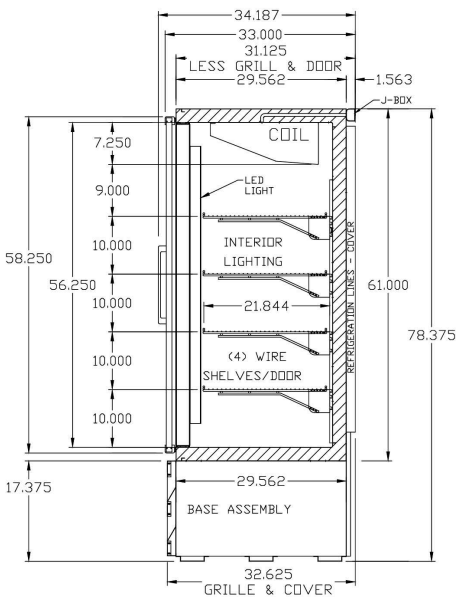

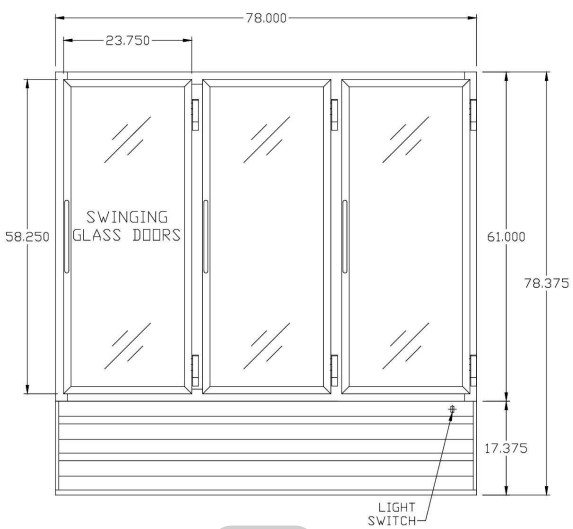

3 DOORS

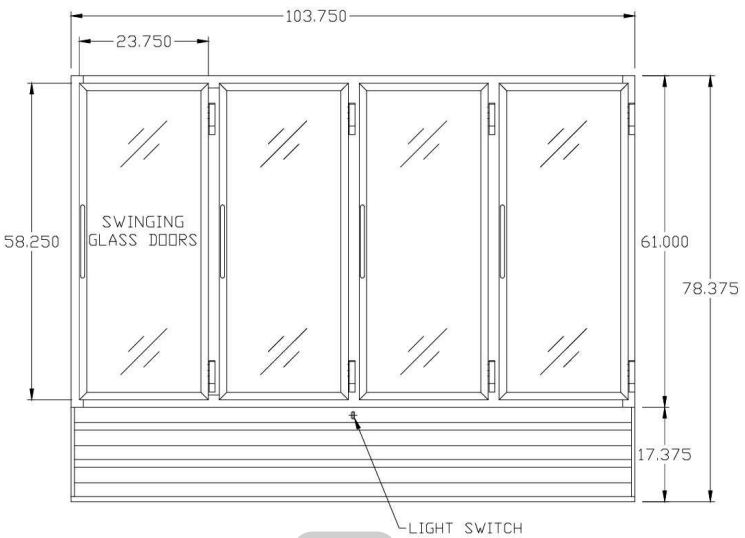

4 DOORS

831 East Cayuga St. - Philadelphia, PA 19124 USA - Phone: 1-800-344-8222 - Fax: (215) 969-4890
sales@howardmccray.com - www.howardmccray.com