



Special Features:

- ✓ 1 solid sliding door
- ✓ 2 shelves and bottom rack standard
- ✓ 13/16"W x 27 1/16"D x 34 7/8"H
- ✓ -5F to -2F temperature range
- ✓ Stainless Steel interior, Stainless steel black painted exterior
- ✓ HC refrigerant
- ✓ Forced-air cooling
- ✓ Full electronic control
- ✓ Built-in condensate evaporator system
- ✓ ETL, ETL Sanitation
- ✓ Tested and conforms to NSF-7 Standard

Product Description:

The Empura E-KBGF36 Glass Froster is a commercial-grade refrigeration unit designed for precise temperature control and reliable performance in foodservice environments. It operates within a -5°F to -2°F temperature range, ideal for maintaining frozen product quality and ensuring food safety. Powered by a 115v/60hz/1ph electrical system with a NEMA-5-15P power cord, it employs HC refrigerant and forced-air cooling for efficient temperature stabilization. Its stainless steel interior and black painted exterior provide durability and ease of sanitation, while the full electronic control system offers precise temperature management.

Intended For Commercial Use Only. Empura assumes no liability for component failure, factory defects or any other damages for units installed in non-commercial foodservice or residential applications.

About Empura Glass Frosters:

The Empura Glass Froster Series is the ultimate finishing tool for bars, pubs, and restaurants dedicated to serving the perfect draft beer or crisp chilled salad. Designed to maintain sub-zero temperatures, these top-loading units rapidly chill glassware and plates, creating a thick, sanitary layer of frost that keeps beverages ice-cold and enhances the visual appeal of service. Available in multiple footprint sizes (e.g., 24", 36", 50"), they fit seamlessly under standard bar counters, ensuring bartenders have immediate access to frosted mugs right at the point of service.



TECHNICAL SPECS

Dimensions	
Exterior Width	36.9"
Exterior Depth	27.1"
Exterior Height	34.8"
Interior Width	29.6"
Storage Capacity	4.3 Ft. ³
Power Cord Length	110"
Refrigeration	
Refrigerant	R600A
Temperature Range	-5 to -2 °F
Compressor Horsepower	1/5 HP
Compressor Style	Reciprocating
Compressor Location	Rear Mounted
Defrost Cycle	Auto
BTU (LBP)	866 BTU/h




Construction	
Display / Control Type	Digital
Insulation	C5H10 Foam
Construction Materials	Stainless Steel
Number of Doors	1
Door Type	Solid / Sliding Door
Installation	Freestanding
Electrical	
V / HZ / Ph	115V/60Hz/1Ph
Amps	1.5 Amps
Plug Type	NEMA 5-15P
Power Cord	Included
Shipping	
Ship Weight	187 lbs.

UNIT VIEW

Front View

Side View

Top View

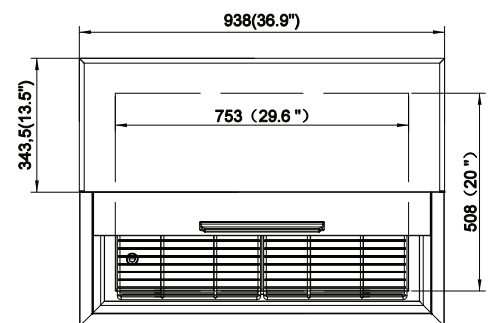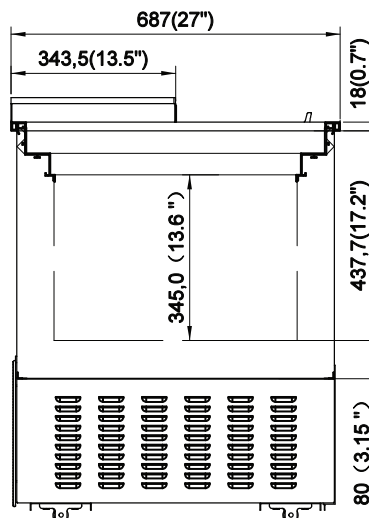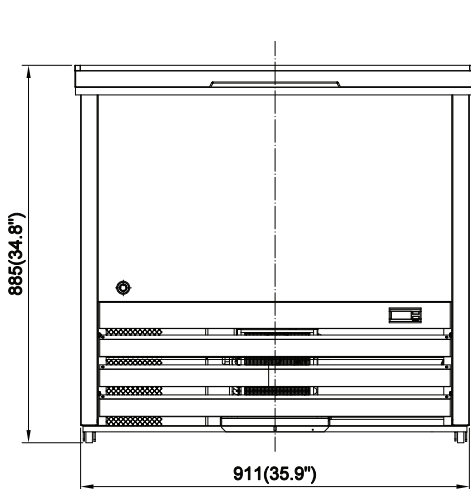

Attention CA Residents: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov



NEMA 5-15P Plug:
This unit comes with a NEMA 5-15P plug