

# Megatop Sandwich Prep Table HKN-SPMT61R2S



**HURAKAN**

Item #: HKN-SPMT61R2S Project: \_\_\_\_\_  
Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_



## Features

- ✓ Exterior SS430, interior pre-coated aluminum
- ✓ Self-closing hinged door, foamed cabinet, magnetic door gaskets
- ✓ Ventilated (air-cooled) system; bottom-mounted HUAYI NUT70NR compressor; finned-aluminum condenser & evaporator; condenser & circulation fans
- ✓ Digital thermostat (Dixell/CAREL)



ETL, US



5-15P



ETL Sanitation

Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.

[www.equip.me](http://www.equip.me)

## Technical Data

|                          |             |
|--------------------------|-------------|
| Width                    | 61 ¾ Inches |
| Depth                    | 35 ½ Inches |
| Height                   | 47 ½ Inches |
| Power Cord Length        | 118 Inches  |
| Cutting Board Width      | 9 ½ Inches  |
| Interior Width           | 57 ¼ Inches |
| Right Door Opening Width | 51 ¾ Inches |
| Cutting Board Depth      | 5 Inches    |
| Interior Depth           | 25 ¾ Inches |




## Technical Data

|                        |                                                                   |
|------------------------|-------------------------------------------------------------------|
| Interior Height        | 28 7/8 Inches                                                     |
| Work Surface Height    | 38 5/8 Inches                                                     |
| Amps                   | 3.5 A                                                             |
| Hertz                  | 60 Hertz                                                          |
| Phase                  | 1 Phase                                                           |
| Voltage                | 115 Volts                                                         |
| 1/6 Size Pan Capacity  | 24                                                                |
| 1/9 Size Pan Capacity  | /                                                                 |
| Access Type            | Hinge (self-closing)                                              |
| Condenser / Evaporator | Finned aluminum                                                   |
| Capacity               | 16.74 cu. ft.                                                     |
| Casters                | 4 (2 with brake)                                                  |
| Compressor Location    | Bottom                                                            |
| Compressor Model       | HUAYI NUT55NR                                                     |
| Door Style / Type      | Hinged / Solid (foamed-in-place)                                  |
| Features               | Digital thermostat (CAREL/Dixell), Circulation Fan, Condenser Fan |
| Number of Doors        | 2 Doors                                                           |
| Number of Shelves      | 2 Shelves                                                         |
| Plug Type              | NEMA 5-15P                                                        |
| Shelf Type             | Plastic-coated iron wire                                          |
| Refrigerant Type       | R290                                                              |
| Refrigeration Type     | Ventilated (air-cooled)                                           |
| Temperature Range      | 32–46 °F                                                          |



## Plan View

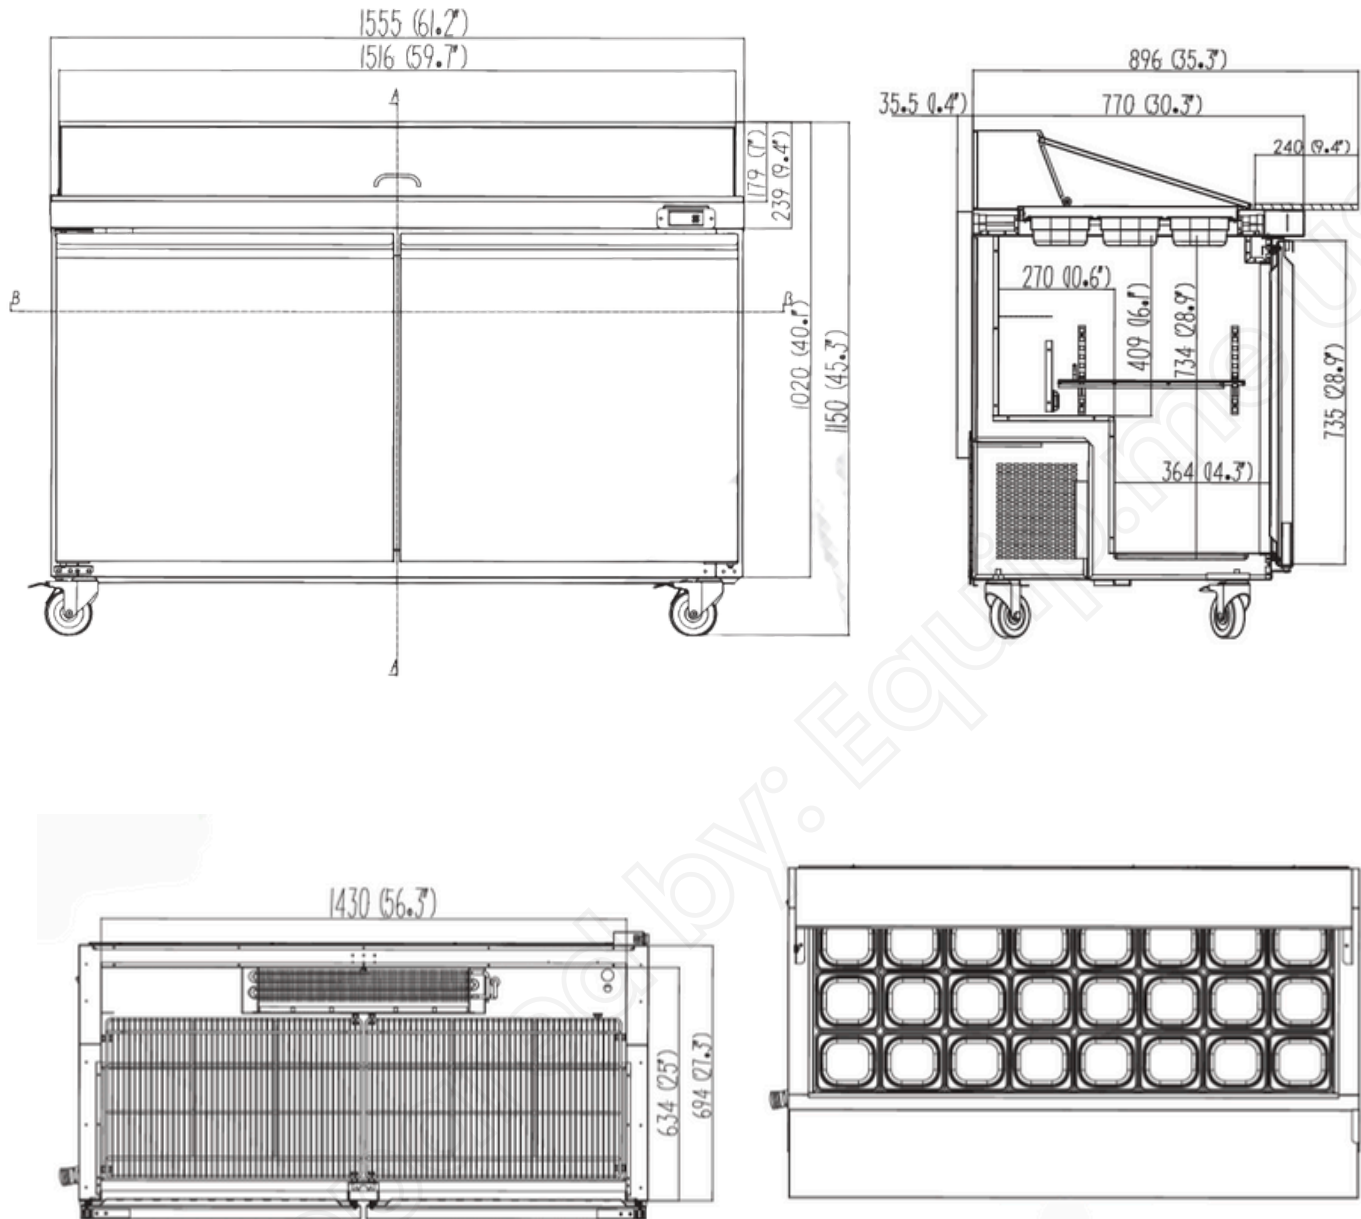



## Notes & Details — Mega Top Series

More ingredients within reach. The raised Mega Top rail keeps your full mise en place at eye level and within arm's reach for faster tickets and fewer steps. Accepts 1/6 pans (capacity varies by model).

Built for the line. SS430 stainless exterior with a pre-coated aluminum interior stands up to daily rushes and wipes clean in seconds.

Even, reliable cooling. Ventilated (air-cooled) system circulates cold air evenly to every corner for consistent holding temps across the cabinet and top rail.

Power you can trust. Bottom-mounted HUAYI compressor (model varies by size) with finned-aluminum condenser & evaporator, plus dedicated condenser and circulation fans for steady performance and quick recovery.

Set it and cook. Digital thermostat (CAREL/Dixell) holds a safe 32–46 °F range to keep ingredients fresh and within HACCP guidelines. Refrigerant: R290.

Line-friendly ergonomics. Comfortable 38 5/8" work-surface height, self-closing hinged door(s) with magnetic gaskets, and adjustable, plastic-coated wire shelves to fit changing menus.

Service & sanitation made easy. Smooth surfaces, lift-off components, and 4 casters (2 with brake) simplify nightly cleaning and maintenance access.

Plug-and-play. 115 V / 60 Hz / 1 Ph, NEMA 5-15P—no special wiring required.

### ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

### 5-15P



This unit comes with a NEMA 5-15P plug

### ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.