



Programmable Multi-Burner Countertop Induction Ranges

Models: IRNG-PHC4-24-3, -PHC4-29-3,
-PHC6-24-3, -PHC6-29-3

The Hatco Programmable Multi-Burner Countertop Induction Range is the only multi-burner programmable induction range of its kind, providing multi-stage cooking control across a single countertop system. Four or six independently controlled burners execute programmed recipes using time, power level, or temperature setpoints, helping maintain consistent results during service. The system stores up to eight recipes that can be accessed across all burners, allowing operators to standardize execution and repeat results in busy kitchen environments where precision and consistency matter most.

Standard features:

- Advanced programmability allows storage of up to eight recipes, each with up to six cooking stages based on time, power level, or temperature setpoints
- Powerful cooking performance with either 2400 or 2900 watts per burner rating
- Intuitive LCD control displays step-by-step instructions, alerts, and prompts to simplify operation
- Independent burner performance provides flexible control and consistent output across every cooking zone
- Precise power adjustment supports repeatable cooking performance across applications
- Digital display provides clear operational visibility during use
- Durable Schott Ceran glass top designed for high-use environments and routine cleaning
- Accessory Stainless Steel Equipment Stands – equipped with 6" (152 mm) locking casters and a lower storage shelf – provide a sturdy, mobile platform for transporting the range to wherever it's needed

Project _____
Item # _____
Quantity _____



Accessories

Stainless Steel Equipment Stands with Casters – For IRNG-PHCx models that bolt directly to the top of the Stand (Must be ordered with IRNG-PHCx model configured with Stand Option)

- ☐ IRNG-PHC4-STND – For IRNG-PHC4 models
- ☐ IRNG-PHC6-STND – For IRNG-PHC6 models

Stainless Steel Equipment Stands with Casters – For IRNG-PHCx models with 4" (102 mm) legs

- ☐ STAND-2424 – For IRNG-PHC4 models
- ☐ STAND-2436 – For IRNG-PHC6 models



For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com

customerservice@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)



[Document Library](#)





Programmable Multi-Burner Countertop Induction Ranges

Models: IRNG-PHC4-24-3, -PHC4-29-3, -PHC6-24-3, -PHC6-29-3

IRNG-PCH6 Model

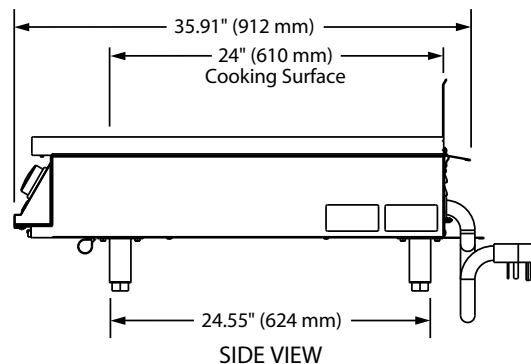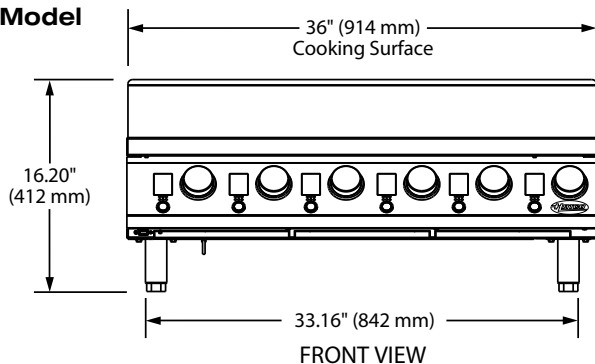

IRNG-PCH4 Model

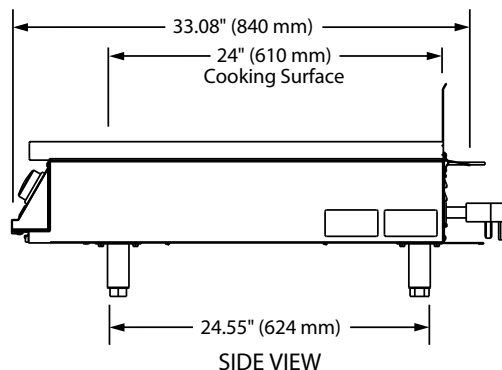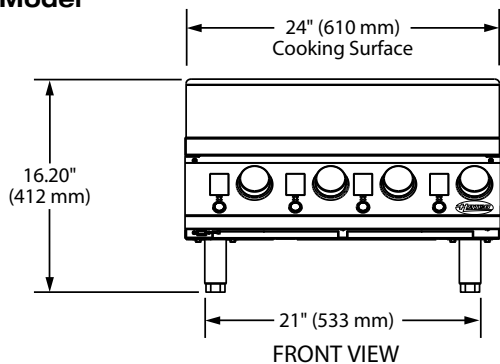

Model	Dimensions (Width x Depth x Height)	Volts	Phase	Watts	Amps	Hz	Plug	Cord Location	Ship Weight†
IRNG-PHC4-24-3	24" x 33.08" x 16.20" (610 x 840 x 412 mm)	208-240	3 Phase	9600	31.5-27.3	50/60	NEMA 15-50P	Rear left bottom base corner	141 lbs. (64 kg)
		230/400		9600	20.8	50/60	IEC-60309		
		220/380		9600	21.9	60	IEC-60309		
IRNG-PHC4-29-3		208-240		11514	37.8-32.8	50/60	NEMA 15-60P		
		230/400		11514	25	50/60	IEC-60309		
		220/380		11514	26.3	60	IEC-60309		
IRNG-PHC6-24-3	36" x 35.91" x 16.20" (914 x 912 x 412 mm)	208-240		14400	40	50/60	NEMA 15-50P		203 lbs. (92 kg)
		230/400		14400	21.9	50/60	IEC-60309		
		220/380		14400	21.9	60	IEC-60309		
IRNG-PHC6-29-3		208-240		17272	48	50/60	NEMA 15-60P		
		230/400		17272	26.3	50/60	IEC-60309		
		220/380		17272	26.5	60	IEC-60309		

† Shipping weight includes packaging and is approximate.







Programmable Multi-Burner Countertop Induction Ranges

Models: IRNG-PHC4-24-3, -PHC4-29-3, -PHC6-24-3, -PHC6-29-3

ACCESSORY IRNG-PCH4-STND

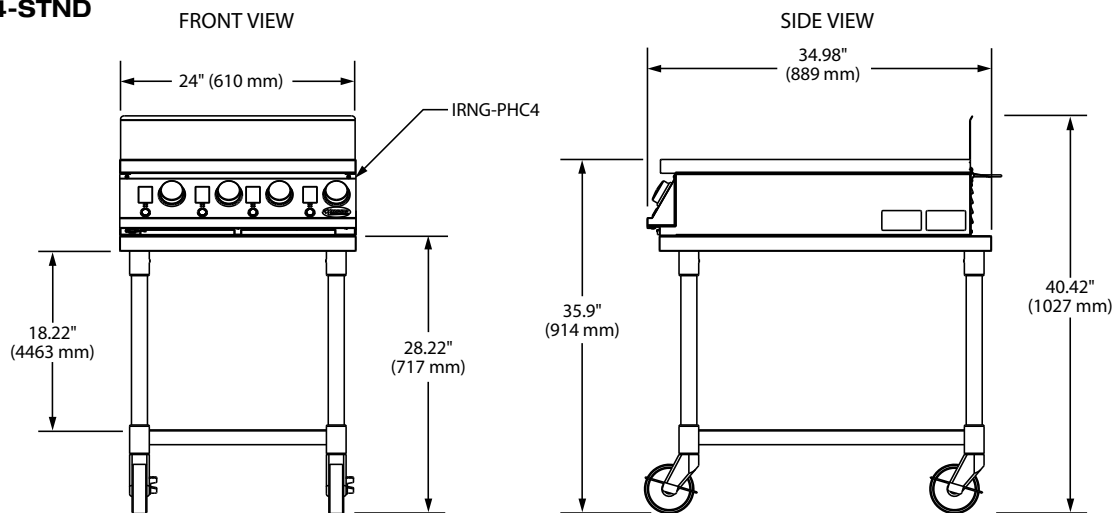

ACCESSORY IRNG-PCH6 STND

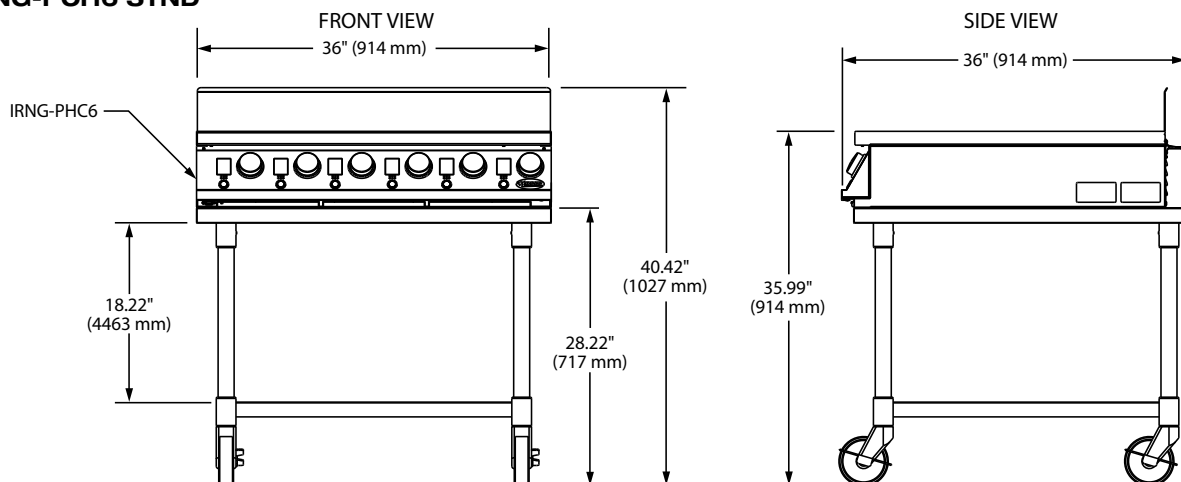

SPECIFICATIONS

Accessory IRNG-PHCx-STND Stainless Steel Equipment Stands with Casters
(For IRNG-PHCx Models that bolt directly to the top of the Stand)

Model	Dimensions (Width x Depth x Height)	Dimensions with Unit (Width x Depth x Height)
IRNG-PHC4-STND	24" x 34.98" x 28.22" (610 x 889 x 717 mm)	24" x 34.98" x 40.42" (610 x 889 x 1027 mm)
IRNG-PHC6-STND	36" x 36" x 28.22" (914 x 914 x 717 mm)	36" x 36" x 40.42" (914 x 914 x 1027 mm)

† Shipping weight includes packaging and is approximate.






Programmable Multi-Burner Countertop Induction Ranges

Models: IRNG-PHC4-24-3, -PHC4-29-3, -PHC6-24-3, -PHC6-29-3

ACCESSORY STAINLESS STEEL STANDS

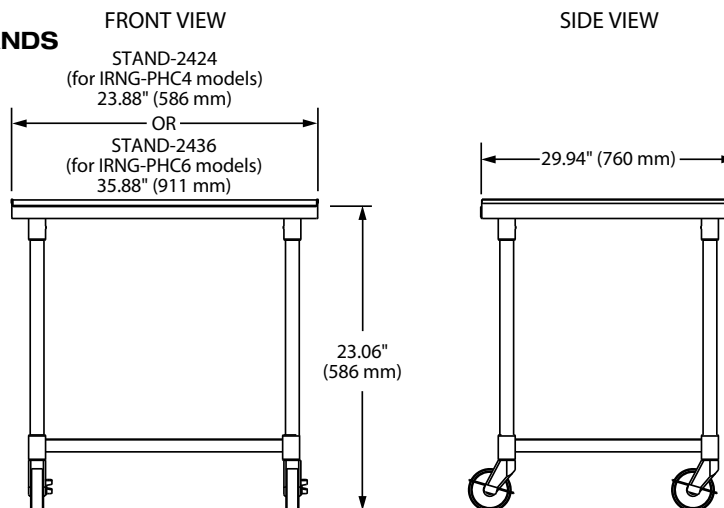


SPECIFICATIONS

Accessory Stainless Steel Equipment Stands with Casters [for IRNG-PHCx Models with 4\" (102 mm) Legs]

Model	Dimensions (Width x Depth x Height)	Ship Weight†
STAND-2424	23.88\" x 29.94\" x 23.06\" (586 x 760 x 586 mm)	80 lbs. (36 kg)
STAND-2436	35.88\" x 29.94\" x 23.06\" (911 x 760 x 586 mm)	96 lbs. (44 kg)

† Shipping weight includes packaging and is approximate.

PLUG CONFIGURATIONS

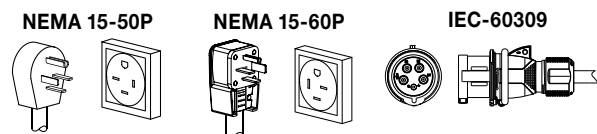

PRODUCT SPECS

Programmable Multi-Burner Countertop Induction Ranges

The Programmable Multi-Burner Countertop Induction Range shall be manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Countertop Induction Range shall be rated at ... watts, ... volts, three phase and be ... inches (... millimeters) in overall width. It shall consist of a stainless steel housing and an aluminum base with four or six induction coils underneath a single glass ceramic cooking surface. It shall include a USB port, a control panel with separate

controls for each burner including a Power/Select Button, Control Knob, and a Control Display, and an 86\" (218 mm) attached power cord with plug.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(414) 671-6350



www.hatcocorp.com

customerservice@hatcocorp.com

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)