5" POLYOLEFIN SWIVEL SHELVING CASTER FOR EQUIPMENT

Casters

Certifications:

NSF

Features:


- Pop-In Stem
- 5" Polyurethane Wheel
- Resistant to Chemicals and Solvents
- Temperature Range -45º to 180ºF
- With or Without Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4)





Material:

- Polyurethane Wheel

Part Number	Description	Brake
5SBR-1ST-PLY	5" Polyurethane Wheel Caster	None
5SBR-1ST-PLY-TBL	5" Polyurethane Wheel Caster w/ Brake	Top Lock Brake
5SBR-1ST-PLY-PS4	5" Polyurethane Wheel Caster 4 Pack w/ Brake	Top Lock Brake



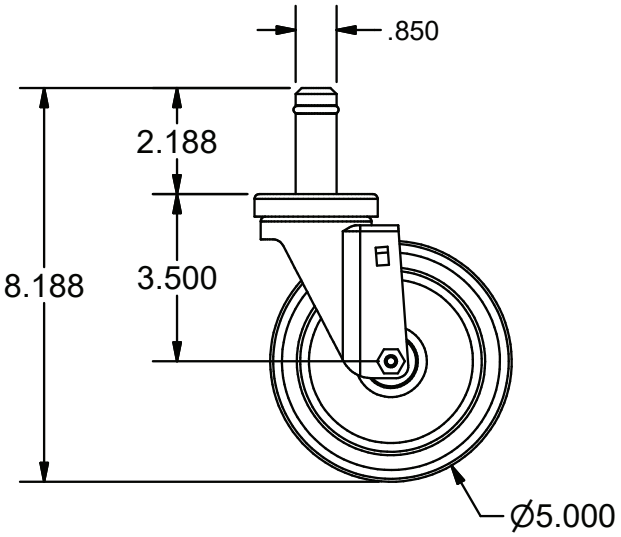

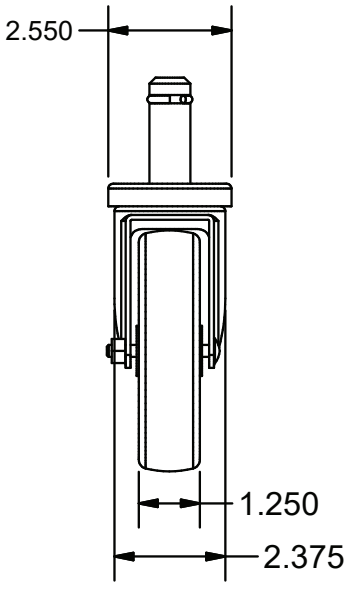

PRODUCT DATA SHEET

BK RESOURCES