5" POLYOLEFIN SWIVEL SHELVING CASTER FOR EQUIPMENT

Casters

Certifications:

NSF

Features:


- Pop-In Stem
- 5" Polyolefin Wheel
- Resistant to Chemicals and Solvents
- Temperature Range -45º to 180ºF
- With or Without Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4)

Material:


- Polyolefin Wheel



Part Number	Description	Brake
5SBR-1ST-LDP	5" Polyolefin Wheel Caster	None
5SBR-1ST-LDP-TBL	5" Polyolefin Wheel Caster w/ Brake	Top Lock Brake
5SBR-1ST-LDP-PS4	5" Polyolefin Wheel Caster 4 Pack w/ Brake	Top Lock Brake

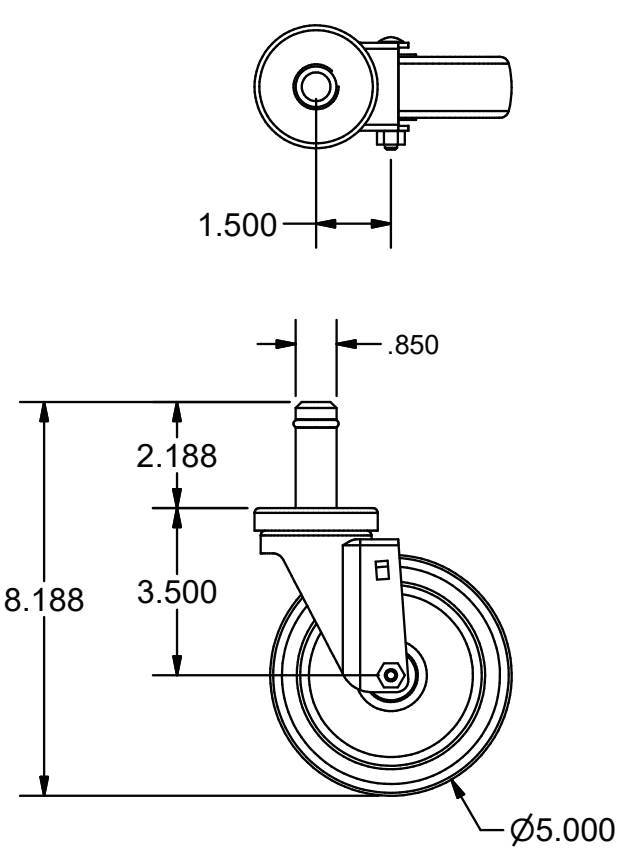

FRONT VIEW
Scale = 1:4

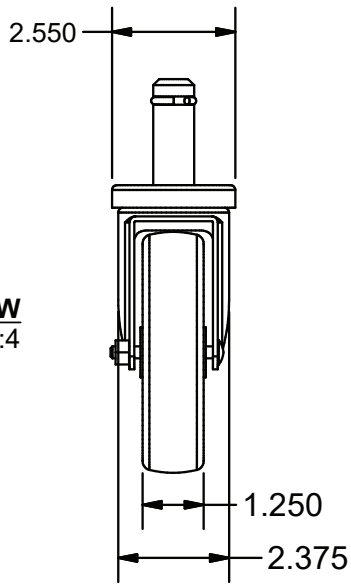

PRODUCT DATA SHEET

BK RESOURCES

© BK Resources August 2026