Top Plate Casters

2-3/8" Top Plate Caster with Polyolefin Wheel

Certifications:

NSF

Features:

- Double Ball Bearing Raceway for Long Wear and Added Strength
- With or Without Top Lock Brake
- 1/2" King Pin

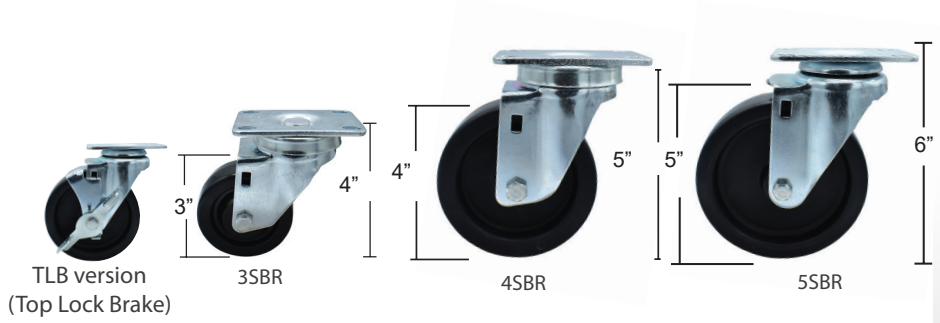



Material:

- Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F
- Zinc Plated
- Polyolefin Wheels

Part Number	Brake	Overall Height	Wheel Size	Capacity
3SBR-1PT-LDP	-	4"	3"	300 LBS
3SBR-1PT-LDP-TLB	TLB	4"	3"	300 LBS
4SBR-1PT-LDP	-	5"	4"	300 LBS
4SBR-1PT-LDP-TLB	TLB	5"	4"	300 LBS
5SBR-1PT-LDP	-	6"	5"	300 LBS
5SBR-1PT-LDP-TLB	TLB	6"	5"	300 LBS



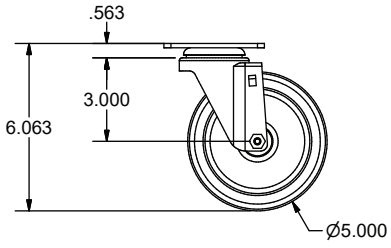

PRODUCT DATA SHEET

BK RESOURCES

© BK Resources August 2026