



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 2 Door Undercounter Refrigerator, in Stainless Steel

MVR48UHC



The Maxx Cold V-Series 2 Door Undercounter Refrigerator provides convenient refrigerated storage without sacrificing valuable floor space in your commercial kitchen. This compact undercounter refrigerator features a stainless steel exterior and powder coated aluminum interior for durability and ease of cleaning. Measuring 48 inches wide, it offers 14.1 cubic feet of storage and has two doors with easy-to-grip recessed handles. This stainless steel undercounter refrigerator has two wire shelves.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Two doors with easy-to-grip recessed door handles
- Provides 14.1 cu ft of refrigerated storage
- One adjustable heavy-duty wire shelf per section/door
- Includes four (4) 3" swivel casters (two with brakes) for easy mobility and cleaning
- Compact size maximizes kitchen space by fitting under counters and other work spaces
- Offers quick access to refrigerated ingredients
- Solid state digital control system
- LED temperature display
- Accommodates full-size sheet pans
- Temperature range of 33°F to 40°F to hold your products at their ideal storage conditions
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed

ELECTRIC

Voltage	Utility Frequency (Hz)	Power Phase	NEMA 5-15P
115V	60	1ph	

Cord Length (Inches): 10"
Plug Type: NEMA 5-15P
Cord set included

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



STORAGE CAPACITY


- Cubic Feet: 14.1 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 33° - 40°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


TOP VIEW

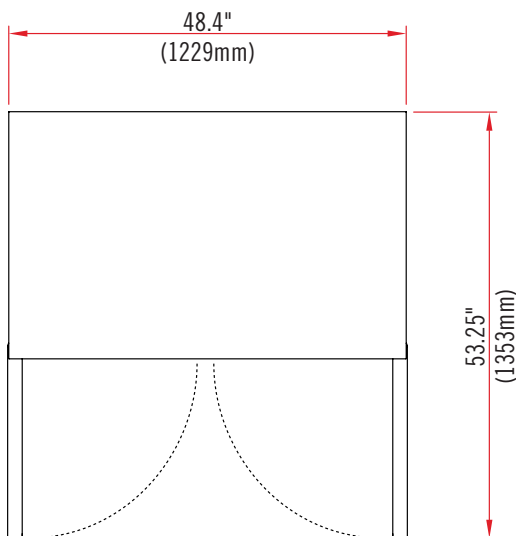

FRONT VIEW

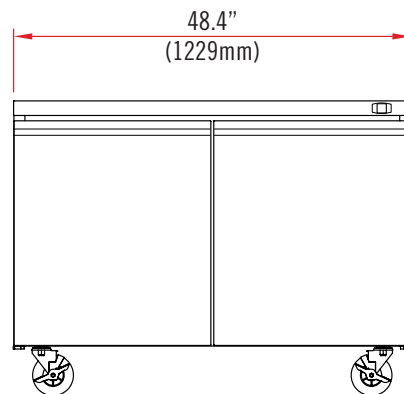

SIDE VIEW

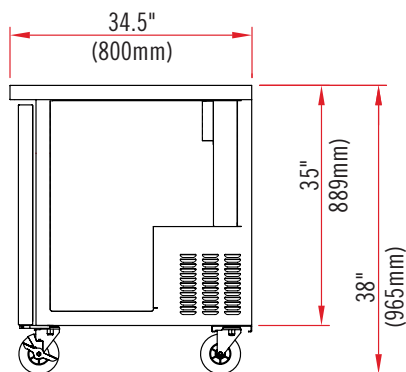

Undercounter

Doors	Shelves	Amps	Refrigerant Type / Oz.	Capacity	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
2	2	3.0A	R290 2.12	14.1 cu. ft.	34.50" x 48.40" x 38.00"	176.0	176.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.