

MAXX COLD® V-Series

Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series Double Glass Door Merchandiser Refrigerator, in Black

MVMR48B



The Maxx Cold V-Series Double Glass Door Merchandiser Refrigerator is a valuable asset for commercial establishments looking to showcase refrigerated products in a visually appealing way. This cost-effective commercial merchandiser refrigerator measures 54"W and has a capacity of 48 cubic feet. It is constructed of a powder-coated steel exterior and a powder-coated aluminum interior. The unit has an easily accessible bottom mount for cleaning and two double-pane insulated glass doors.

FEATURES AND CONSTRUCTION

- Automatic defrost system
- Easily accessible bottom mount for cleaning
- Constructed of a powder coated steel exterior and powder coated aluminum interior
- Two double-pane insulated glass self-closing swing doors allow customers to easily see the contents
- Interior LED lighting illuminates the contents of the merchandiser, enhancing product visibility and presentation
- 8 adjustable heavy-duty PE-coated wire shelves
- 4 rollers (2 with leveling feet)
- Holding temperature of 33°F to 41°F (1°C to 5°C)
- Storage capacity of 48 cu ft
- Includes lock and key set for security
- Illuminated top panel for advertising and promoting products
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed

ELECTRIC

Voltage 120V	Utility Frequency (Hz) 60	Power Phase 1ph	NEMA 5-15P
-----------------	------------------------------	--------------------	-------------------

Cord Length (Inches): 72"
Plug Type: NEMA 5-15P
Cord set included



3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



STORAGE CAPACITY


- Cubic Feet: 48 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 33° - 41°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


FRONT VIEW

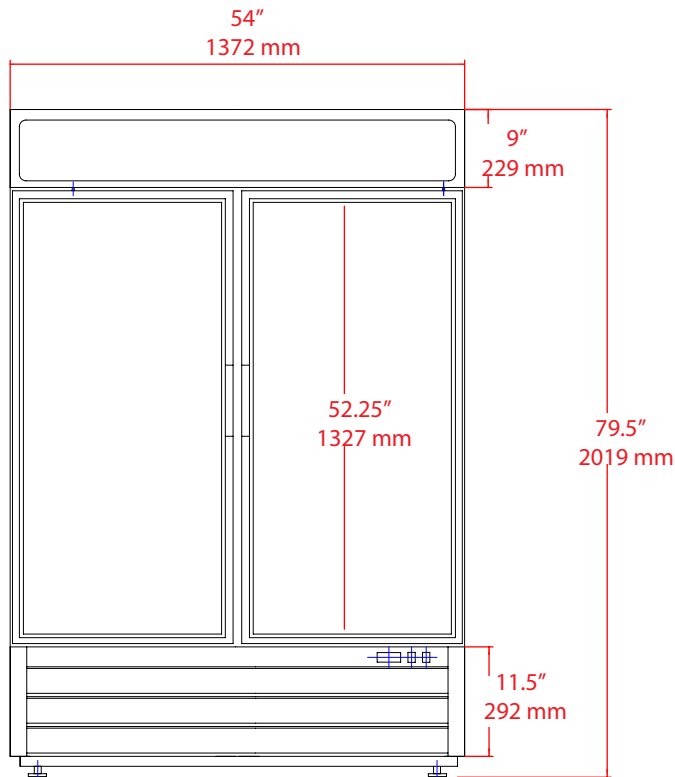

TOP VIEW

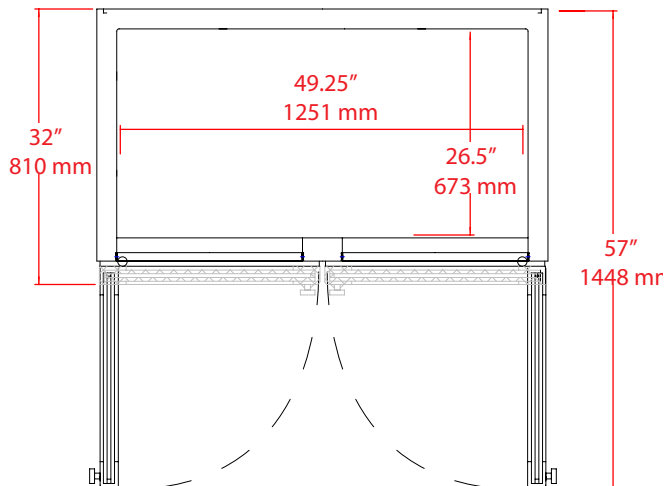

BACKLIT DISPLAY PANEL

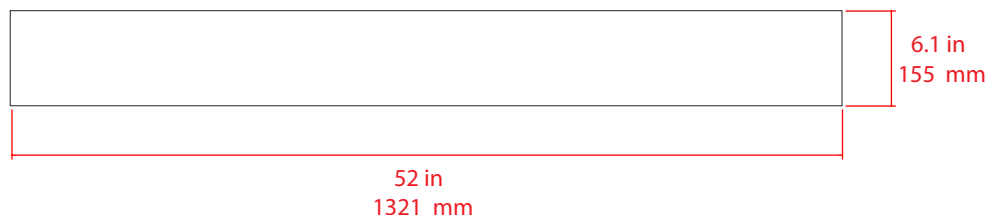

Merchandiser

Doors	Shelves	Amps	Refrigerant Type / Oz.	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
2	8	4.5A	R290A 3.7	32.00" x 54.00" x 79.50"	490.0	573.0

INSTALLATION

- Units are equipped with roller wheels and leveling feet. Swivel caster wheels are an available option for increased mobility.