

MAXX COLD® V-Series

Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 1 Door Undercounter Refrigerator, in Stainless Steel

MVR29UHC



The Maxx Cold V-Series 1 Door Undercounter Refrigerator provides convenient refrigerated storage without sacrificing valuable floor space in your commercial kitchen. This compact undercounter refrigerator features a stainless steel exterior and powder coated aluminum interior for durability and ease of cleaning. Measuring 29 inches wide, it offers 7.8 cubic feet of storage and has one door with an easy-to-grip recessed handle. This stainless steel undercounter refrigerator has one wire shelf.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- One door with easy-to-grip recessed door handle
- Provides 7.8 cu ft of refrigerated storage
- One adjustable heavy-duty wire shelf per section/door
- Includes four (4) 3" swivel casters (two with brakes) for easy mobility and cleaning
- Compact size maximizes kitchen space by fitting under counters and other work spaces
- Offers quick access to refrigerated ingredients
- Solid state digital control system
- LED temperature display
- Accommodates full-size sheet pans
- Temperature range of 33°F to 40°F to hold your products at their ideal storage conditions
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed

ELECTRIC

Voltage 115V	Utility Frequency (Hz) 60	Power Phase 1ph	NEMA 5-15P
-----------------	------------------------------	--------------------	-------------------

Cord Length (Inches): 10"
Plug Type: NEMA 5-15P
Cord set included



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



STORAGE CAPACITY


- Cubic Feet: 7.8 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 33° - 40°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


TOP VIEW

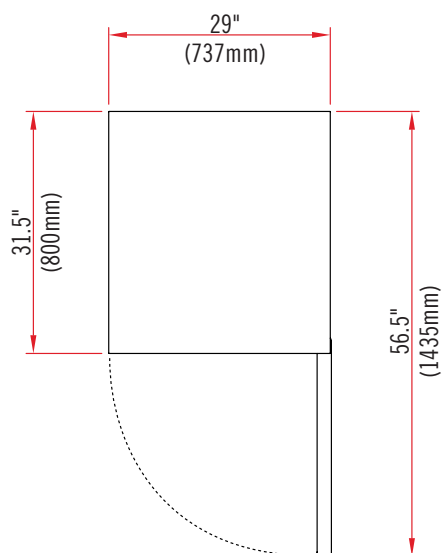

FRONT VIEW

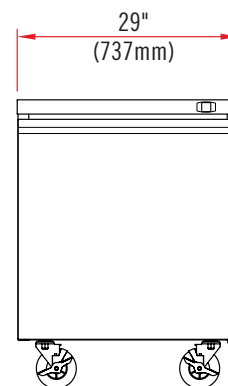

SIDE VIEW

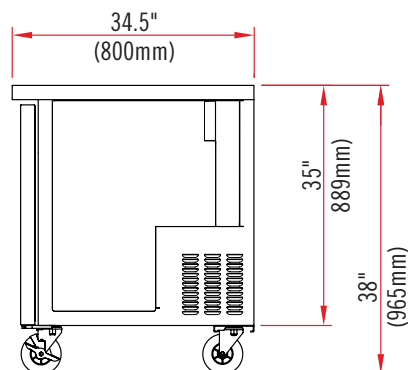

Undercounter

Doors	Shelves	Amps	Refrigerant Type / Oz.	Capacity	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	1	2.5a	R290 1.23	7.8 cu. ft.	34.50" x 29.00" x 38.00"	132.0	165.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements.