



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 1 Door Refrigerated Sandwich and Salad Prep Station, in Stainless Steel

MVR29SHC



Designed to streamline the preparation of sandwiches and salads, the Maxx Cold V-Series 1 Door Refrigerated Sandwich and Salad Prep Station combines refrigerated storage with a convenient workspace. Ideal for any deli, sandwich shop, restaurant or cafe, this prep table will help optimize your foodservice operations in the front or back of house. The durable stainless-steel one-door cold prep station is designed with an easy-to-grip recessed door handle and can accommodate full-size sheet pans.

FEATURES AND CONSTRUCTION

- Insulated top cover helps maintain freshness
- One door with an easy-to-grip recessed door handle
- One adjustable heavy-duty wire shelf
- Includes four (4) 3" swivel casters (two with brakes) for mobility
- 7.2 cu ft storage capacity accommodates 8 pans
- LED temperature display
- Urethane foam insulated walls and door
- Equipped with an 11.42" deep polyethylene cutting board that provides a convenient area for assembling sandwiches and salads
- Stainless steel exterior and powder coated aluminum interior construction
- Equipped with full set of clip-on divider bars and (12) 4" deep plastic pans
- Holding temperature of 33°F to 40°F (1°C to 4°C)
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed

ELECTRIC

Voltage	Utility Frequency (Hz)	Power Phase	NEMA 5-15P
115V	60	1ph	

Cord Length (Inches): 10"
Plug Type: NEMA 5-15P
Cord set included

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



STORAGE CAPACITY


- Cubic Feet: 7.2 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 33° - 40°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


FRONT VIEW

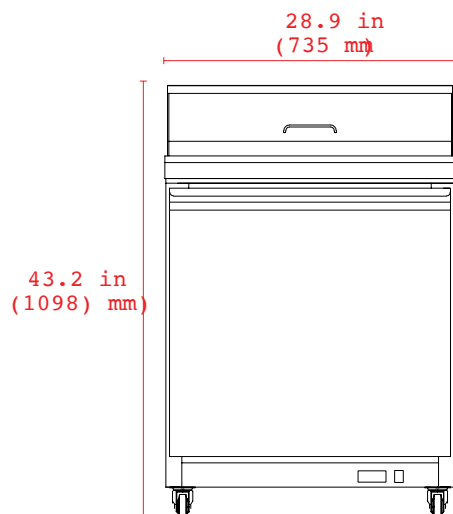

SIDE VIEW

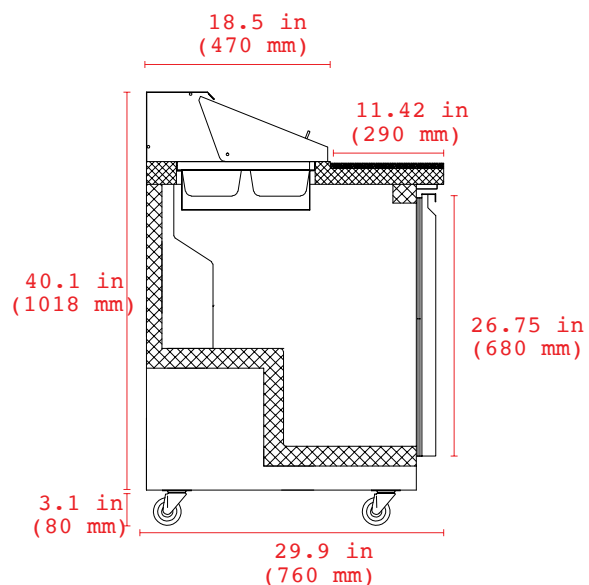

TOP VIEW



Prep Table

Doors	Shelves	Amps	Refrigerant Type / Oz.	Capacity	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	1	2.9A	R290A 1.59	7.2 cu. ft.	29.00" x 31.50" x 45.00"	150.0	204.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements.