



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 2 Solid Door Reach-In Refrigerator, Bottom Mount, in Stainless Steel

MVR-49FDHC



Ideal for use in restaurants, cafes, bakeries, catering businesses and more, the Maxx Cold V-Series 2 Solid Door Reach-In Refrigerator is a smart investment. Offering ample storage space for perishable goods, ingredients, prepared foods and beverages, this commercial reach-in refrigerator measures 54"W and has a storage capacity of 42 cubic feet. Built to withstand the demands of a commercial kitchen, it is constructed of an easy-to-clean stainless steel exterior and painted aluminum interior.

FEATURES AND CONSTRUCTION

- Reach-in refrigerator with two self-closing, locking solid doors with easy-to-grip recessed handles
- 42 cu ft storage capacity with 6 adjustable heavy-duty wire shelves
- Constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters for easy mobility in your commercial kitchen
- Digital control system lets you easily adjust the temperature
- Temperature range 34°F to 40°F (1°C to 4°C)
- LED temperature display is easy to read
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed
- Easily accessible bottom mount for cleaning
- Urethane foam insulated walls and doors

ELECTRIC

Voltage	Utility Frequency (Hz)	Power Phase	NEMA 5-15P 
115V	60	1ph	

Cord Length (Inches): 98.50"
Plug Type: NEMA 5-15P
Cord set included

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



STORAGE CAPACITY


- Cubic Feet: 42.06 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 34 - 41

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity


FRONT

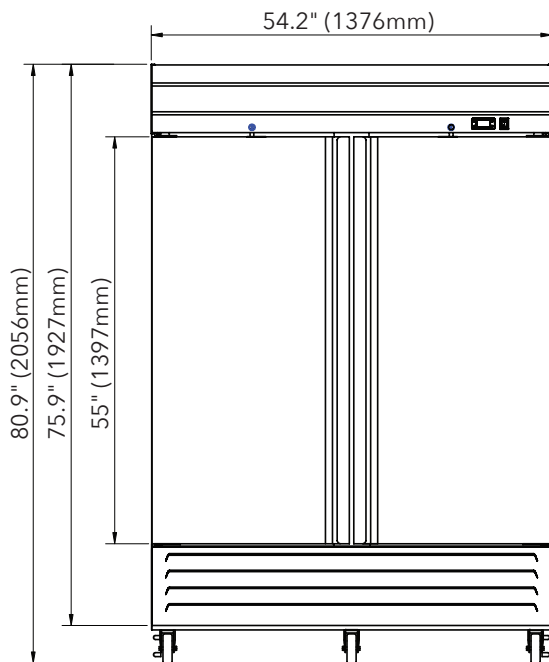

SIDE

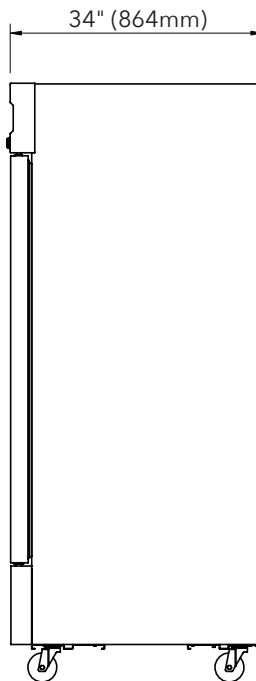

TOP

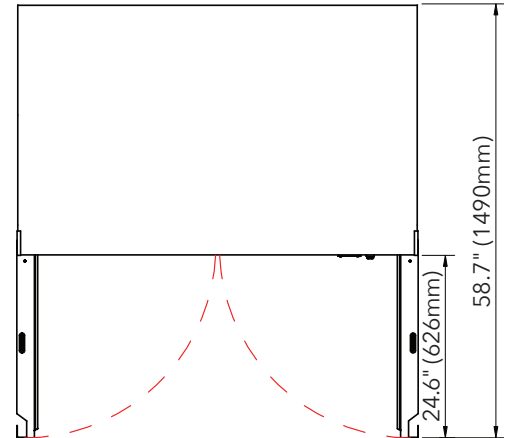

Reach-In

Doors	Shelves	Amps	HP	Wattage	Refrigerant Type / Oz.	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
2	6	2.2A		300W	R290 2.33 oz	34.00" x 54.20" x 80.90"	342.0	417.0