

Addenda

Non-Refrigerated Self-Service Case w/ Bag Area

• CDS4565

44-3/4"L x 32-5/8"D x 68-1/4"H

- Included
- 1" Price tag molding (black)
 - Black interior & exterior
 - Holds (8) 13" x 18" trays
 - LED 3500K side lights
 - One year parts & labor warranty
 - Tissue box holder
 - Upper and lower storage areas



CDS4565

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Powder coated Silversan Black	
INTERIOR COLOR	• Powder coated Silversan Black	
BASE SUPPORT	• Levelers	
FRONT DOORS	• Clear glass swinging doors w/o lock	
PACKAGE LEDGE	• 10" package ledge	
LOWER STORAGE	• Lower front storage with swing doors	
PRICE TAG MOLDING	• 1" Price tag molding (black)	
REAR DOORS	• None (solid back panel)	• Clear glass swinging doors w/o lock
SHELVING	• (4) levels tray support, non-lighted shelves	
LIGHTS	• LED 3500K side lights	
ELECTRICAL CONNECTION	• 6' 90° Straight blade power cord	
MISCELLANEOUS		• Second year parts & labor warranty

Addenda

Non-Refrigerated Self-Service Case w/ Bag Area


Structural Concepts®

DELIVERING FRESH. ALWAYS.™


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged non-refrigerated products	Ambient

PLAN VIEW

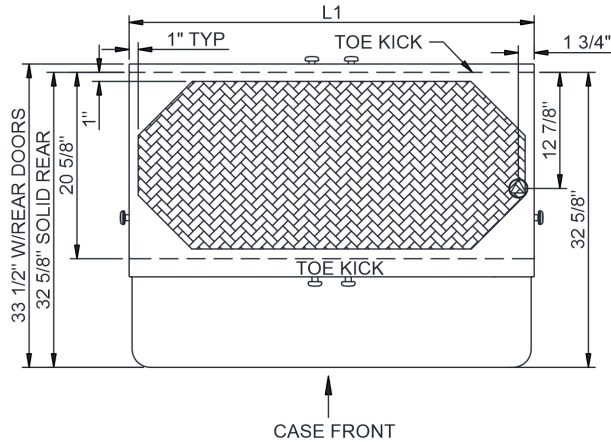

SIDE VIEW

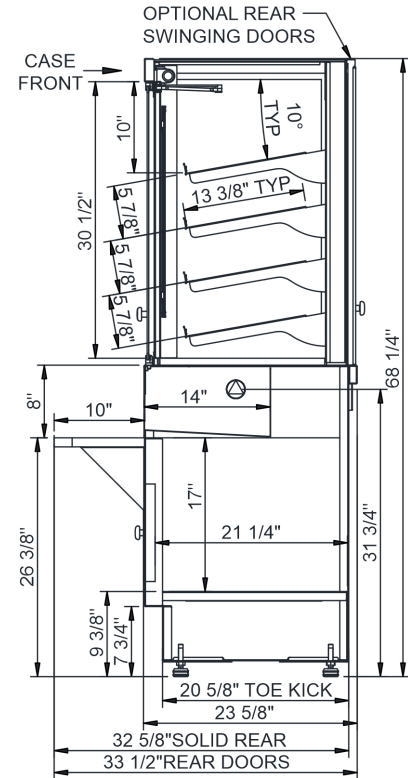

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).
 LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.
 REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.
 DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications																	
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt	
CDS4565	N/A	44.75	.00	Ambient/Lights (N/A)		Circuit #1	110-120	1	60	0.70	6	2+G	5-15P	N/A	N/A	N/A	550

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models ETL Listed to UL 65
ETL Sanitation to NSF/ANSI 2



DOE 2017
Energy Efficiency
Compliant

Important Notes:

1) 24" Minimum door entry clearance required (Without shipping skid)

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Placement of Case

Consider where the display case will be positioned relative to walls, ceilings, HVAC vents, windows, and other equipment discharging warm air.

The 5' - 10' - 15' Rule

Stay 5' away from an exterior window

Direct sunlight increases the heat load on the front of the display resulting in the refrigeration system having to work harder and possible condensation on the case.

With service display cases that have a glass front, air blowing on the front glass causes condensation to develop.

Remain 10' away from HVAC ceiling vents

Air blowing on the front of the display interrupts the air curtain and causes product temperatures to increase.

Position the display 15' away from exterior doors

Air drafts from the front exterior doors interrupt the air curtain, allowing warm air to penetrate the inside of the display, affecting product temperature.

Minimum 4" clearance to walls & ceilings.

Refer to spec sheets & design guide for further information.

