

Slide Top Bottle Coolers

BLACK SLIDE TOP BOTTLE COOLERS



BUILT TO PERFORM, DESIGNED TO DELIVER

The Asber Bottle Coolers are engineered for functionality, durability, and long-term performance in high-volume bar and beverage service environments. Featuring a chip-resistant black vinyl exterior finish on the front, sides, and back, these units are designed to withstand heavy use while maintaining a professional appearance. This finish is preferred for bar equipment due to its superior resilience compared to traditional painted surfaces, ensuring lasting aesthetics even in the busiest operations. Inside, a stainless-steel interior and floor provide exceptional strength, sanitation, and ease of cleaning, upholding the highest standards of food safety and hygiene.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy-savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Fully front-breathing, side-mounted refrigeration system maximizes airflow and enables flush installation in tight spaces, against walls or under counters.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.

- Electronic controller provides accurate, easy-to-monitor temperature management.
- Temperature range: Maintains 32°F to 38°F in ambient conditions up to 100°F and 65% RH.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Chip-resistant black vinyl exterior: Provides superior scratch and wear resistance versus painted surfaces, for a sleek look in busy retail areas.
- Full stainless-steel interior ensure strength, hygiene, and ease of maintenance.
- Doors lock with a universal key for product security during off-hours.
- Stainless-steel sliding doors with easy, tool-free removal for cleaning.
- Compact and sturdy construction integrates seamlessly into bar layouts and service stations, maximizing storage and cooling efficiency.
- Integrated bottle cap opener and catcher for efficient, one-step service in high-traffic bar environments.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- Adjustable legs.
- Low-profile 3" casters.
- Stainless-steel exterior finish.



ADBC 50



ADBC 80

MODEL	DOORS	DIVIDERS	CAPACITY		VOLTS - FREQUENCY	POWER HP	AMP.	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft³	Bottels 12 oz.				Width	Depth	Height	Lbs	ft³
BLACK SLIDE TOP BOTTLE COOLERS												
ADBC 50	2	3	14.4	286	115V. - 50/60Hz.	1/4	2.0	50-3/4	26-3/8	33-3/8	220	38.8
ADBC 65	2	4	20.9	360	115V. - 50/60Hz.	1/4	2.0	65-3/4	26-3/8	33-3/8	262	49.4
ADBC 80	3	7	25.7	547	115V. - 50/60Hz.	1/4	2.0	80-1/4	26-3/8	33-3/8	315	60.0
ADBC 94	3	7	30.1	672	115V. - 50/60Hz.	1/4	2.0	95-3/4	26-3/8	33-3/8	428	70.6


SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026

Slide Top Bottle Coolers


BLACK SLIDE TOP BOTTLE COOLERS




ADBC 50

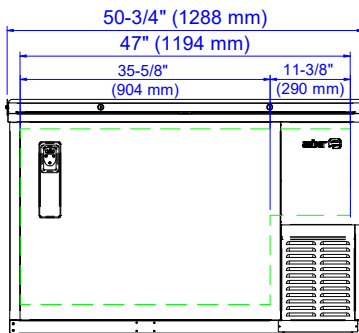



ADBC 65

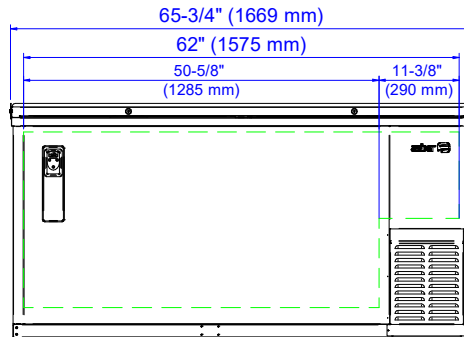

ADBC 80

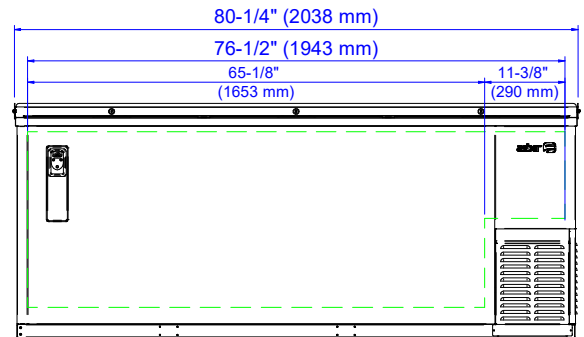

ADBC 94

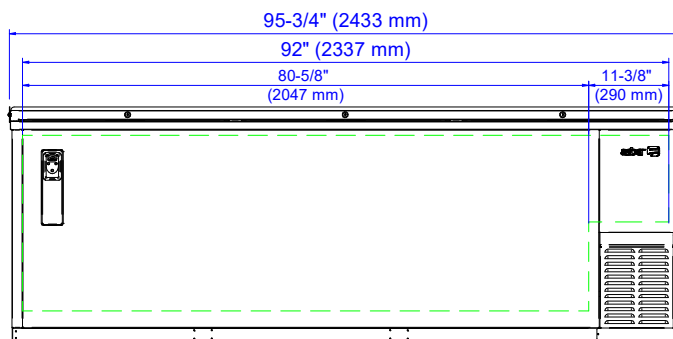

MODEL	ADBC 50	ADBC 65	ADBC 80	ADBC 94
ELECTRICAL DATA				
Volts - Frequency	115V. - 50/60Hz.			
Power (HP)	1/4			
Full Amp Load	2.0			
Plug Type	NEMA 5-15P			
Refrigerant	R290			
INTERIOR DIMENSIONS (in)				
Width	47	62	76-1/2	92
Depth	18-7/8			
Height	25			
Divider (in)	23 x 20-3/4			
SHIPPING DIMENSIONS (in)				
Width	52-3/8	67-3/8	84-1/2	98-3/8
Depth	30-5/8			
Height	40-5/8			



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.
- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026