

Reach-in Refrigerators

SOLID DOORS REFRIGERATORS
GLASS DOORS REFRIGERATORS



BUILT TO PERFORM, DESIGNED TO DELIVER

The Asber ARR H / ARR Series Reach-In Refrigerators are built for durability, hygiene, and efficiency, making them the cornerstone of any commercial kitchen. With a robust stainless-steel exterior, they endure the demands of high-volume use, while the fully stainless-steel interior ensures strength, easy cleaning, and superior food safety. The NSF-compliant coved corner floor design promotes optimal sanitation and simplifies daily maintenance.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2-3/8" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Reversible Condensing Fan Motor: Ensuring optimal airflow, reduced maintenance, and improved long-term efficiency.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Temperature range: Maintains 32°F to 38°F in ambient conditions up to 100°F and 65% RH.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Doors lock with a universal key for product security during off-hours.
- Accepts standard 18" x 26" sheet pans, providing flexible storage options for busy commercial kitchens (except 17 & 37 H models).
- Field-reversible doors on solid single-door models for flexible installation.
- LED interior lighting (solid and glass door units): Energy-efficient illumination for greater visibility inside the cabinet.
- "G" Models: Argon-insulated double-pane glass doors for improved efficiency and condensation-free visibility.

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- Full-length recessed handles: Provide ergonomic access while maintaining a clean, professional appearance.
- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Standard 4" casters (front with brakes) provide stability, mobility, and easy access for cleaning and maintenance.
 - 17 ft³ models include 2-1/2" casters, front with brakes.

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES

- Extra shelves.
- 6" Stainless-steel legs.



ARR 23 H



ARR 37 2G H




ARR 72 H

MODEL	DOORS	SHELVES	CAPACITY	VOLTS - FREQUENCY	POWER HP	AMP.	EXTERIOR DIMENSIONS (in)			SHIPPING	
			ft³				Width	Depth	Height	Lbs	ft³
SOLID DOORS REFRIGERATORS											
ARR 17	1	3	17.0	115V. - 60Hz.	1/4	2.5	27-1/2	26-3/4	77-1/8	260	42.4
ARR 23 H	1	3	23.0	115V. - 60Hz.	1/4	2.5	28-1/8	31-1/8	83-1/2	289	49.4
ARR 37 H	2	6	37.0	115V. - 60Hz.	1/3	3.2	43-1/2	32-1/4	84	395	74.2
ARR 49 H	2	6	49.0	115V. - 60Hz.	1/3	3.2	55-1/4	31-1/8	83-1/2	459	88.3
ARR 72 H	3	9	72.0	115V. - 60Hz.	2 x 1/3	7.5	82-3/4	32-1/4	85-1/4	633	155.4
GLASS DOORS REFRIGERATORS											
ARR 23 1G H	1	3	23.0	115V. - 60Hz.	1/4	2.5	28-1/8	31-1/8	83-1/2	289	49.4
ARR 37 2G H	2	6	37.0	115V. - 60Hz.	1/3	3.2	43-1/2	32-1/4	84	395	74.2
ARR 49 2G H	2	6	49.0	115V. - 60Hz.	1/3	3.2	55-1/4	31-1/8	83-1/2	459	88.3
ARR 72 3G H	3	9	72.0	115V. - 60Hz.	2 x 1/3	7.5	82-3/4	32-1/4	85-1/4	633	155.4

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026

Reach-in Refrigerators

SOLID DOORS REFRIGERATORS
GLASS DOORS REFRIGERATORS

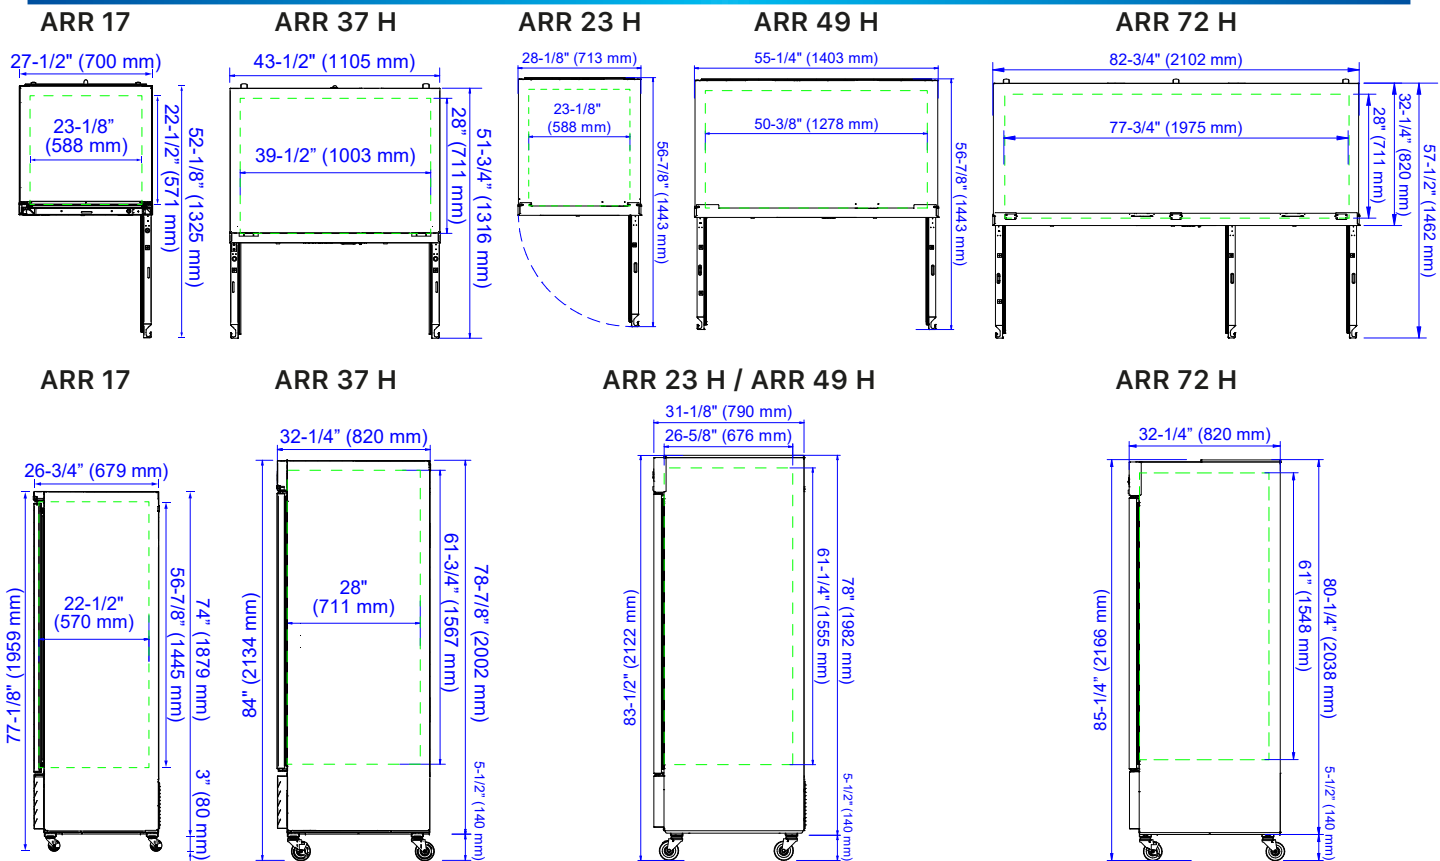

MODEL	ARR 17	ARR 23 H	ARR 37 H	ARR 49 H	ARR 72 H
ELECTRICAL DATA					
Volts - Frequency	115V. - 60Hz.				
Power (HP)	1/4		1/3		2 x 1/3
Full Amp Load	2.5		3.2		7.5
Plug Type	NEMA 5-15P				NEMA 5-15P (2)
Refrigerant	R290				
INTERIOR DIMENSIONS (in)					
Width	23-1/8		39-1/2	50-3/8	77-3/4
Depth	22-1/2	26-5/8	28	26-5/8	28
Height	56-7/8	61-1/4	61-3/4	61-1/4	61
Shelf (in)	22-1/2 x 20-1/8	24-1/4 x 25-5/8	25-3/8 x 19-1/4	24-1/4 x 25-5/8	
SHIPPING DIMENSIONS (in)					
Width	29-1/2	33-1/2	46-1/8	56-1/4	85-3/8
Depth	29-1/2	29-1/2	35	32-1/4	36-5/8
Height	80-3/4	84-5/8	83-7/8	84-5/8	85-3/8



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.

- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026