

Direct Draw Beer Dispensers

BLACK DIRECT DRAW BEER DISPENSERS



BUILT TO PERFORM, DESIGNED TO DELIVER

As bar layouts continue to shrink, efficient refrigeration airflow has become essential for maintaining performance in tight commercial environments. The Asber Bar Refrigerators are designed with a fully front-breathing system, allowing seamless integration into compact bar layouts without sacrificing cooling power or reliability. The side-mounted refrigeration system provides unobstructed access to all interior storage areas, eliminating the interference of a roof-mounted evaporator. This thoughtful design ensures reliable, worry-free operation in fast-paced commercial environments.

INSULATION & ENERGY EFFICIENCY

High Performance, Environmentally Responsible Design

- Ecomate™ insulation: Industry-leading, eco-friendly technology (ODP-0, GWP-3), provides superior temperature retention and energy-savings even under heavy-duty kitchen conditions.
- Maximum thermal efficiency: 2" thick insulation throughout.

REFRIGERATION SYSTEM & PERFORMANCE

Efficient, Reliable, and Environmentally Friendly

- R290 Hydrocarbon refrigerant: Delivers quicker temperature recovery and lower energy consumption, ensuring environmental responsibility.
- Fully front-breathing, side-mounted refrigeration system maximizes airflow and enables flush installation in tight spaces, against walls or under counters.
- Hermetic compressor system with epoxy-coated evaporator provides long-lasting performance and corrosion resistance operation.
- Electronic controller with digital display provides accurate, easy-to-monitor temperature management.
- Temperature range: Maintains 32°F to 38°F in ambient conditions up to 100°F and 65% RH.
- Greatest airflow to the tower: Engineered to optimize air circulation into the draft tower for uniform cooling, enhanced pour consistency, and reduced product waste.

LIGHTING & DISPLAY FEATURES

Clear, Attractive, and Energy-Efficient

- Energy-efficient, shadow-free LED interior lighting, for product visibility.
- "G" Models: Argon-insulated double-pane glass doors for improved efficiency and condensation-free visibility.

CONSTRUCTION & FEATURES

Durable, Safe, and Easy to Maintain

- Chip-resistant black vinyl exterior: Provides superior scratch and wear resistance versus painted surfaces, for a sleek look in busy retail areas.
- Full stainless-steel interior ensure strength, hygiene, and ease of maintenance.
- Dunnage rack on the floor: Adds protection against excessive wear-and-tear while raising kegs off the surface to promote improved airflow beneath them—resulting in more consistent internal cooling.
- Doors lock with a universal key for product security during off-hours.
- Models 23: Field-reversible door for flexible installation.

OPERATOR-FOCUSED DESIGN

Ergonomic, Practical, and Sanitary

- In-step interior design: provides a superior door seal, reducing energy loss, and preventing condensation.
- Magnetic one-piece door gaskets: Ensure a tight seal to preserve internal temperatures; tool-free removable, simplifying cleaning and maintenance.
- Models 23: Standard 2-1/2" casters (front with brakes).

CERTIFICATIONS

- NSF-7 Certified: Meets rigorous food safety and sanitation standards.
- ETL Listed: Certified for electrical and mechanical safety.
- DOE Compliant: Meets U.S. Department of Energy efficiency standards.

OPTIONS & ACCESSORIES


- Adjustable legs.
- Low-profile 3" casters.
- Stainless-steel exterior finish.



ADDC 23



ADDC 58

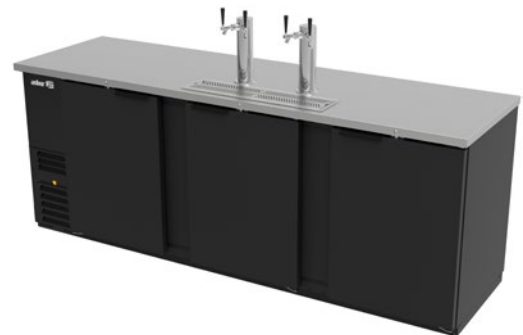


ADDC 94

MODEL	DOORS	1/2 KEGS (Ø 16-1/8")	TOWERS	TAPS	VOLTS - FREQUENCY	POWER	AMP.	EXTERIOR DIMENSIONS (in)			SHIPPING	
						HP		Width	Depth	Height	Lbs	ft³
BLACK DIRECT DRAW BEER DISPENSERS												
ADDC 23	1	1	1	1	115V. - 50/60Hz.	1/10	1.5	24-7/8	30-3/4	38-1/8	190	24.7
ADDC 58	2	2	2	3	115V. - 50/60Hz.	1/3	3.0	59-1/2	28-1/4	36-7/8	324	49.4
ADDC 68	2	3	2	3	115V. - 50/60Hz.	1/3	3.0	69-1/2	28-1/4	36-7/8	337	56.5
ADDC 78	3	4	2	4	115V. - 50/60Hz.	1/3	3.0	80	28-1/4	36-7/8	428	63.6
ADDC 94	3	5	2	4	115V. - 50/60Hz.	1/3	3.0	95-1/2	28-1/4	36-7/8	448	77.7


SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | MODEL 23: HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026

Direct Draw Beer Dispensers


BLACK DIRECT DRAW BEER DISPENSERS

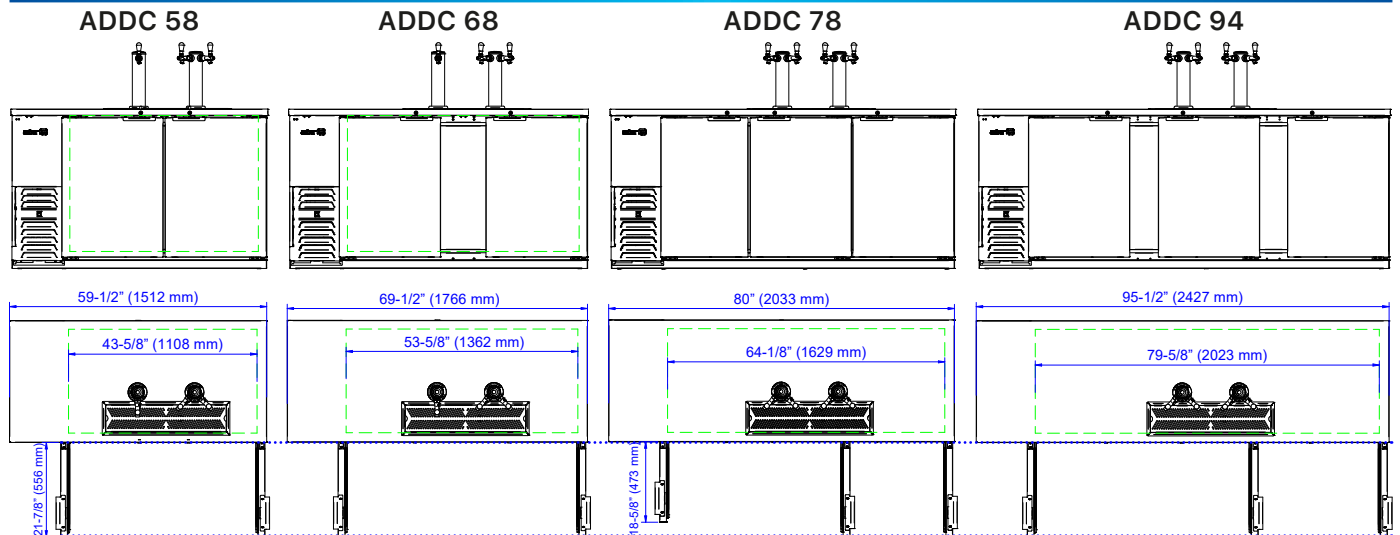

ABBC 58, 68, 78, 94
SIDE



ADDC 23

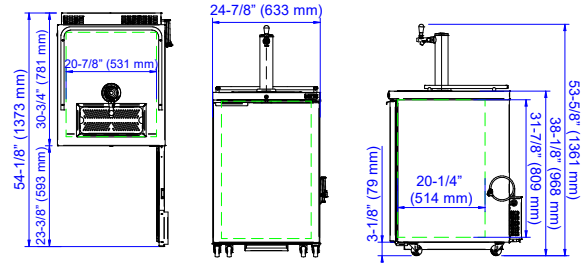

MODEL	ADDC 23	ADDC 58	ADDC 68	ADDC 78	ADDC 94
ELECTRICAL DATA					
Volts - Frequency	115V. - 50/60Hz.				
Power (HP)	1/10	1/3			
Full Amp Load	1.5	3.0			
Plug Type	NEMA 5-15P				
Refrigerant	R290				
KEGS CAPACITY					
1/2 Kegs (Ø 16-1/8")	1	2	3	4	5
1/4 Kegs (Ø 16-1/8")	1	2	3	4	5
1/4 Slim Kegs (Ø 11-1/8")	2	6	8	10	12
1/6 Kegs (Ø 9-1/4")	4	8	12	14	17
SHIPPING DIMENSIONS (in)					
Width	34-5/8	63	72-7/8	82-5/8	98-3/8
Depth	28-3/4	31-1/2			
Height	45-1/4	43-1/4			



INSTALLATION REQUIREMENTS

- ELECTRICAL CONNECTION:** Units pre-wired at factory with chord and NEMA 5-15P plug set included for 115/60/1 phase.
- REFRIGERANT:** R290 is classified as A3 flammable refrigerant; risk of fire or explosion due to puncture of refrigerant tubing; follow handling instructions carefully.

- RESIDENTIAL APPLICATIONS DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.












SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | MODEL 23: HEIGHT INCLUDES CASTERS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026

Direct Draw Beer Dispensers

BLACK DIRECT DRAW BEER DISPENSERS



KEGS FOOTPRINTS

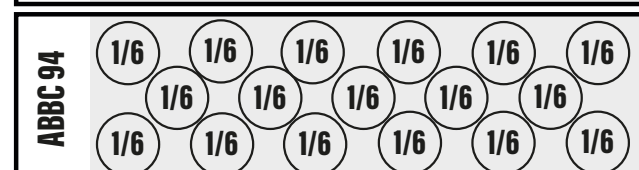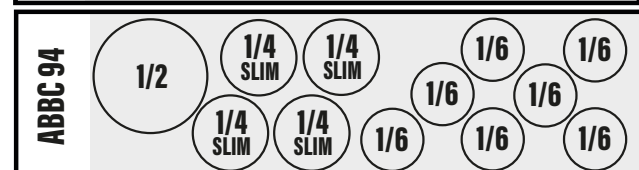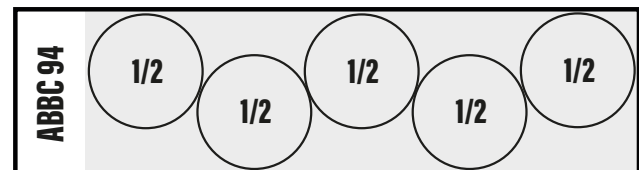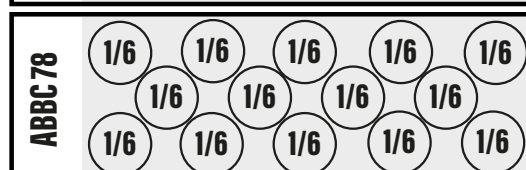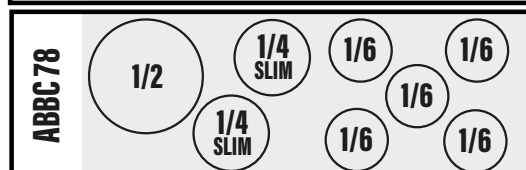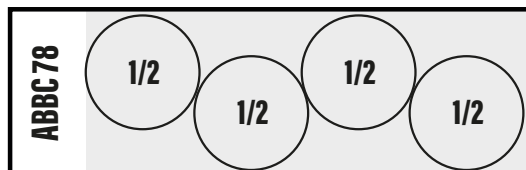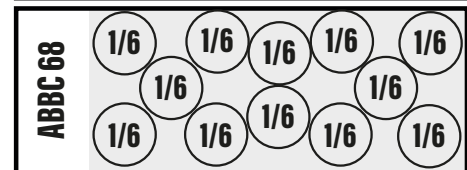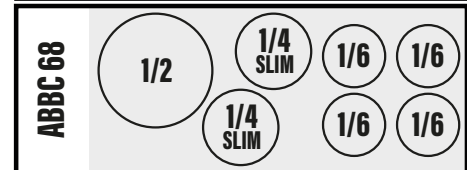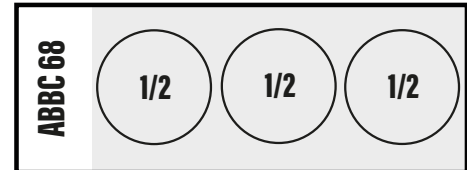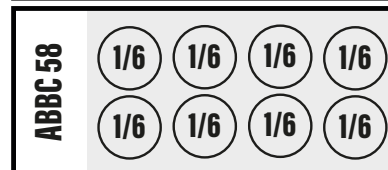

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026