

Fryers

GAS FRYERS – NG
GAS FRYERS – LPG



DESIGNED FOR RELIABILITY AND PERFORMANCE

The Asber Gas Restaurant Fryers are engineered for durability, efficiency, and ease of use in demanding kitchen environments. Built with all stainless-steel construction, including the interior and exterior front and sides, these fryers ensure long-term reliability, corrosion resistance, and simplified maintenance. At the core of the design is a welded 16-gauge stainless-steel tank with an extra-smooth peened finish that promotes easy cleaning, extended service life, and consistent performance in busy commercial operations.

HEATING SYSTEM

Powerful, Efficient, and Consistent

- High-efficiency "Guitar"-type burners deliver 35,000 BTU each, providing rapid heat recovery and steady temperature performance for continuous frying.
- High-temperature stainless-steel heat baffles are mounted to the heat exchanger tubes for improved thermal efficiency and uniform heat distribution.
- Total output: 105,000 BTU (3-burner configuration).

TEMPERATURE CONTROL

Accurate, Reliable, and Easy to Use

- Electromechanical thermostat provides precise control within a temperature range of 200°F to 400°F.
- Ensures consistent cooking results across a wide variety of menu items.
- High-limit safety shut-off automatically engages if oil exceeds safe operating temperatures.

CONSTRUCTION FEATURES

Strong, Functional, and Built to Last

- All stainless-steel body (front, sides, and door) provides durability, corrosion resistance, and easy cleaning.
- Welded 16-gauge stainless-steel fry tank with smooth peened finish resists buildup and simplifies maintenance.
- 1¼-inch diameter drain valve allows fast and efficient draining for quick cleanup.
- Two nickel-plated oblong wire mesh baskets included, featuring cool-grip coated handles for safe and comfortable use.
- 6-inch adjustable stainless-steel legs ensure stability and provide clearance for cleaning underneath.

OTHER FEATURES

- Manual ignition for dependable operation.
- Certified to ETL / ANSI Z83.11–CSA 1.8 standards for performance and safety.

OPTIONS & ACCESSORIES

- 5" castors.
- Night Covers.
- Joining Strips.
- Splash Guards.
- Specify LPG or NG.



AEF 4050 S E



AEF 75 S



AEF 2525 S

MODEL	BURNERS	BTU X BURNER		TOTAL BTU		CAPACITY	EXTERIOR DIMENSIONS (in)			SHIPPING	
		NG	LPG	NG	LPG	Lbs.	Width	Depth	Height	Lbs	ft³
GAS FRYERS – NG OR LPG											
AEF 4050 S E (CAS)	3	35.000	30.000	105.000	90.000	40/50	15-1/2	31-3/4	44	183	10.6
AEF 50 S (CAS)	3	35.000	30.000	105.000	90.000	50	15-1/2	31-3/4	46-1/8	150	14.1
AEF 75 S (CAS)	4	35.000	30.000	140.000	120.000	75	19-1/2	31-3/4	46-1/8	176	17.7
AEF 2525 S (CAS)	4	35.000	30.000	140.000	120.000	25/25	15-1/2	31-3/4	46-1/8	181	14.1


SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES LEGS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026

Fryers


GAS FRYERS - NG
GAS FRYERS - LPG




AEF 4050 S E

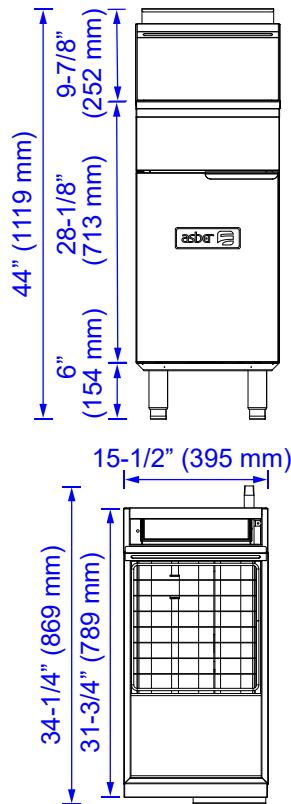


AEF 50 S

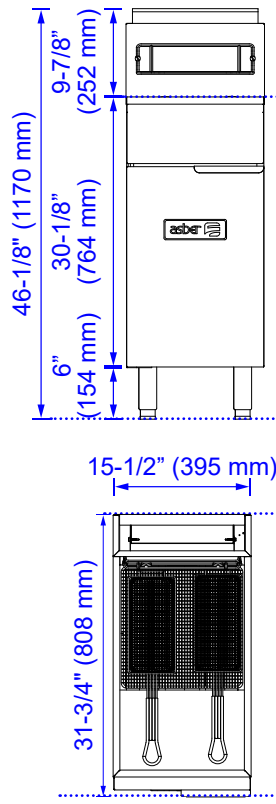

AEF 75 S

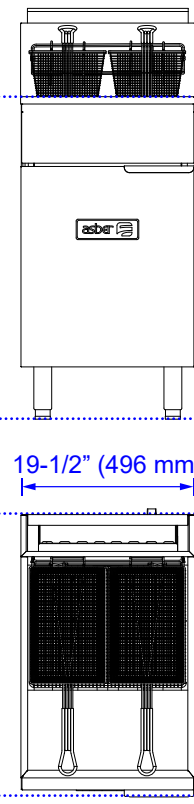

AEF 2525 S

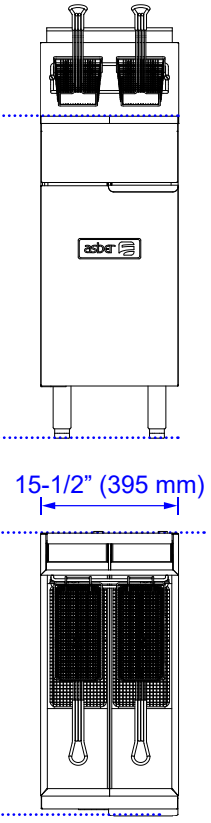

MODEL	AEF 4050 S E (CAS)	AEF 50 S (CAS)	AEF 75 S (CAS)	AEF 2525 S (CAS)
GAS CONNECTION				
Gas Type	NG / LPG			
Gas Pressure	5" W.C. / 10" W.C.			
Gas Line	Ø 3/4" (at least)			
SHIPPING DIMENSIONS (in)				
Width	16-7/8		20-7/8	16-7/8
Depth	32-5/8			
Height	43-1/4			



INSTALLATION REQUIREMENTS

- 1. GAS PRESSURE:** a pressure regulator sized for this unit is included, to be installed at the time of connection.
- 2. GAS CONNECTION:** gas line must be 3/4" or larger, same if flexible connectors are used.
- 3. VENTILATION:** an adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, [www. NFPA.org](http://www.NFPA.org).
- 4. CLEARANCE:** 3" on the sides and the back for combustible; 0" for non-combustible buildings.
- 5. DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE | HEIGHT INCLUDES LEGS. | VALID FOR CONTINENTAL USA & CANADA. | SEP, 2026