

AMCO SHELVING SYSTEMS

PLASTIC PLUS® SHELVING

AMCO by
SPG



Vented:

- ☐ PP1824V
- ☐ PP1830V
- ☐ PP1836V
- ☐ PP1842V
- ☐ PP1848V
- ☐ PP1854V
- ☐ PP1860V
- ☐ PP2424V
- ☐ PP2430V
- ☐ PP2436V
- ☐ PP2442V
- ☐ PP2448V
- ☐ PP2454V
- ☐ PP2460V

Solid:

- ☐ PP1824S
- ☐ PP1830S
- ☐ PP1836S
- ☐ PP1842S
- ☐ PP1848S
- ☐ PP1854S
- ☐ PP1860S
- ☐ PP2424S
- ☐ PP2430S
- ☐ PP2436S
- ☐ PP2442S
- ☐ PP2448S
- ☐ PP2454S
- ☐ PP2460S

Stationary: Mobile Posts:

- | | |
|------------------------------|-------------------------------|
| ☐ P08 | ☐ PC08 |
| ☐ P14 | ☐ PC14 |
| ☐ P34 | ☐ PC34 |
| ☐ P54 | ☐ PC54 |
| ☐ P64 | ☐ PC64 |
| ☐ P72 | ☐ PC72 |
| ☐ P84 | ☐ PC84 |

ITEM # _____ MODEL # _____ QTY: _____
PROJECT: _____
OPTIONS: ☐ YES _____ ☐ NO _____

Standard Features & Benefits

- ◆ Grey polypropylene plastic removable panels snap onto heavy duty epoxy coated frames
- ◆ Plastic Plus panels make removal fast and easy for cleaning or reconfiguring the unit
- ◆ Plastic Plus panels and frames contain an antimicrobial agent that protects the finishes from bacteria, mold, mildew and fungi that cause odors, stains, and product degradation. This additional protection helps keep the shelving cleaner between cleanings*
- ◆ Plastic Plus can be used in environments ranging from -20°F (-29°C) to 190°F (88°C)
- ◆ Plastic Plus fits standard AMCO posts, which have a unique square design that provides greater strength and durability than typical round post systems. Compatible with other AMCO shelving products
- ◆ Strength rated to support 1,000 lbs (455kg) of uniformly loaded static weight per shelf over 48" in length span
- ◆ Stainless steel posts recommended with Plastic Plus Shelving for a rust-free shelving solution
- ◆ Posts also available in Grey Bond™ (GR) and Polygard® (PG) finishes

*This product does not protect users or others against bacteria, viruses, germs or other disease organisms. It is for the protection of the product only. The antimicrobial product should always be thoroughly cleaned after each use.

For SPG's complete product menu,
visit www.spgusa.com or call 877.503.4SPG (4774)

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP

AMCO SHELVING SYSTEMS

PLASTIC PLUS® SHELVING


Specifications:

Shelving:

Frames are constructed of .0625 thick 1" O.D. steel square tubing. A square tapered 1- $\frac{3}{4}$ " high steel collar is welded at each corner. An additional tube is welded longitudinally onto the corner of the frame. Gray polypropylene shelves in solid or vented styles are securely fastened onto the steel frame.

Posts:

Posts are .65" thick 1" O.D. square steel and are notched every 2" on each corner. Installed at the bottom of each post is a nylon housing for a steel leveler 3/8"-16 X 1-1/4". The leveler has a $\frac{3}{4}$ " threadless shoulder to eliminate mop and/or broom fibers.


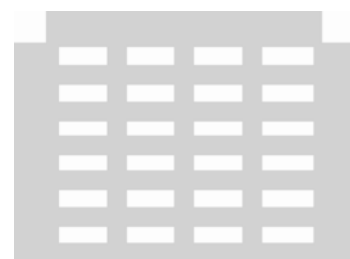


Vented Shelf



Solid Shelf

Vented Model No.	Solid Model No.	W X L		Weight	
		In	mm	Lbs	kg
PP1824V	PP1824S	18-1/8 X 24	455 X 610	7-1/2	3.4
PP1830V	PP1830S	18-1/8 X 30	455 X 760	10	4.5
PP1836V	PP1836S	18-1/8 X 36	455 X 915	12	5.4
PP1842V	PP1842S	18-1/8 X 42	455 X 1065	13-1/2	6.1
PP1848V	PP1848S	18-1/8 X 48	455 X 1220	15-1/2	7
PP1854V	PP1854S	18-1/8 X 54	455 X 1370	18	8.2
PP1860V	PP1860S	18-1/2 X 60	455 X 1525	19-1/2	8.8
PP2424V	PP2424S	24-1/8 X 24	610 X 610	9	4.1
PP2430V	PP2430S	24-1/8 X 30	610 X 760	12	5.4
PP2436V	PP2436S	24-1/8 X 36	610 X 915	14	6.3
PP2442V	PP2442S	24-1/8 X 42	610 X 1065	16	7.2
PP2448V	PP2448S	24-1/8 X 48	610 X 1220	18	8.2
PP2454V	PP2454S	24-1/8 X 54	610 X 1370	19-1/2	8.8
PP2460V	PP2460S	24-1/8 X 60	610 X 1525	23	10.4

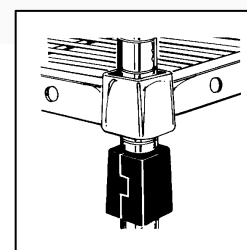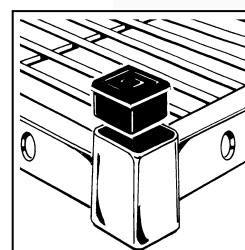

Assembly:

Four nylon tapered collets are packed with each shelf. The collet may be installed onto any notched position on the post. Posts are installed into the tapered shelf collars which mate with the tapered nylon collet to securely seat the shelf onto the post without the need for special tools.

*Select a finish. Add suffix to model number.

Finish	Suffix	Color
Polygard®	PG	Blue
Gray Bond™	GR	Gray
Stainless Steel	SS	

Model No.*		Height		Weight	
		In	mm	Lbs	Kg
Stationary	Mobile Posts				
P08	PC08	8	200	1	0.5
P14	PC14	14	355	2	0.9
P34	PC34	34	865	3	1.4
P54	PC54	54	1370	4	1.8
P64	PC64	64	1625	4- $\frac{1}{2}$	2
P72	PC72	72	1830	5	2.3
P84	PC84	84	2130	5- $\frac{1}{2}$	2.5

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke

SPG International, LLC
11230 Harland Drive NE
Covington, GA 30014
877-503-4SPG (4774)

www.spgusa.com

The best names in the business
all have one thing in common.

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP