




Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301

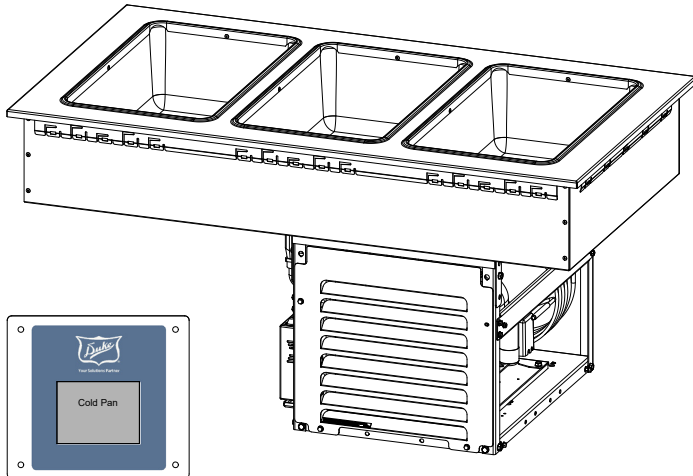

**FCP3**

## OPTIONS:

- ☐ No-Drain (required for California)
- ☐ Slanted kit option
- ☐ Slimline Mount - replace "SB with SL - with drains "-D"
- ☐ Basic Control
- ☐ Condensate evaporator

## Certifications:



UL/ANSI NSF4

DUKE MANUFACTURING CO.  
2305 N. Broadway  
St. Louis, MO 63102  
800.735.3853 Toll Free  
314.231.5074 Fax  
www.dukemfg.com  
SS-1297 R290 Flush Mount Cold Pan - Drop-In

Specification subject to change



**WARNING** For CA residents: go to  
[www.dukemfg.com/prop65](http://www.dukemfg.com/prop65) for prop 65 warning

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

### MODEL:

### Drop In Flush Mount Cold Pan

- ☐ FCP1 Drop In, Flush Cold Pan 1-section with drain
- ☐ FCP2 Drop In, Flush Cold Pan 2-section with drain
- ☐ FCP3 Drop In, Flush Cold Pan 3-section with drain
- ☐ FCP4 Drop In, Flush Cold Pan 4-section with drain
- ☐ FCP5 Drop In, Flush Cold Pan 5-section with drain
- ☐ FCP6 Drop In, Flush Cold Pan 6-section with drain

### BODY:

- Top mount with flush mount pans
- Top – heavy gauge 300 series stainless steel
- Stamped top wells available for standard wells
- Exterior outer body - paint grip steel, one body housing all wells
- Standard 14" horizontal spacing for wells
- High density CFC free polyurethane foam insulation (zero global warming potential (GWP), & zero ozone depletion potential (ODP))

### FEATURES:

- Standard food pan - 12 x 20
- Will also accommodate 1/2 and 1/3rd size pans
- Capacity: 1 - 6 section units
- Accepts up to 6" deep full size food pans
- Food pans flush with top (not recessed)
- Standard - drain for each well, (manifolded to one location)
- Fits in ThurmaDuke bodies (same counter cutout sizes as std N7 cold pans)
- Slimline – 2-3 Sections
- Refrigerant R290 
- Individual coils for each well
- TXV control for optimal performance
- Open suspended compressor compartment
- Compressor slides out for easy service
- Stainless steel louver panel for compressor cage
- 6 Foot Power Cord

### CONTROLS

- Standard intuitive, easy to use touch screen control
- WIFI and Bluetooth connectivity
- On/Off Switch

# R290 Flushmount Cold Pan


LEGEND

▲

 ELECTRIC CONNECTION POINT SINGLE PHASE  
With 6' cord and plug

●


 - DRAIN CONNECTION

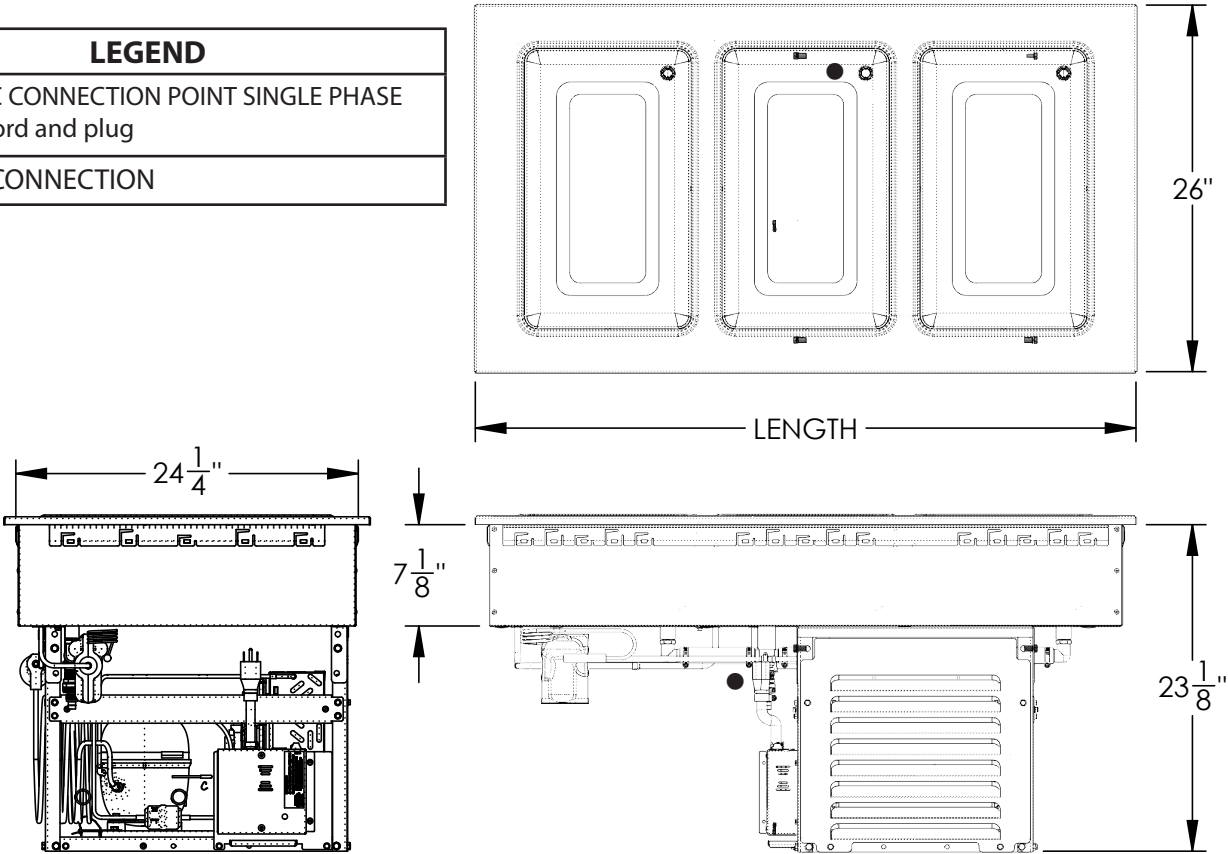

ELECTRICAL SPECIFICATIONS

\*If optional condensate evaporator add 300 Watts, 2.6 Amps

| Model   | Refrig. R290  | 120 Volt 60Hz |      |
|---------|--------------------------------------------------------------------------------------------------|---------------|------|
|         | Grams                                                                                            | Amps          | NEMA |
| FCP1-SB | 90                                                                                               | 3.9           | 5-15 |
| FCP2-SB | 100                                                                                              | 3.9           | 5-15 |
| FCP3-SB | 120                                                                                              | 6.8           | 5-15 |
| FCP4-SB | 130                                                                                              | 6.8           | 5-15 |
| FCP5-SB | 140                                                                                              | 6.8           | 5-15 |
| FCP6-SB | 150                                                                                              | 6.8           | 5-15 |

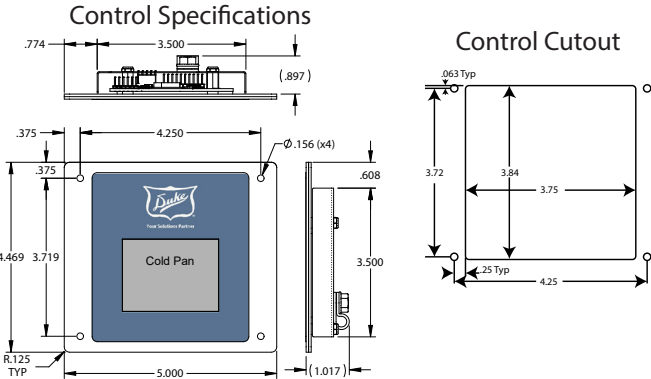

DIMENSIONS:

Freight Class: 100

| Model   | Height |       | Length |        | Width |       | Counter Top Cutouts |        | Cube<br>ft.<br>crated | Crated Ship Weight |       |
|---------|--------|-------|--------|--------|-------|-------|---------------------|--------|-----------------------|--------------------|-------|
|         | in.    | cm    | in.    | cm     | in.   | cm    | Width.              | Length |                       | lbs.               | kg    |
| FCP1-SB | 24.0   | 60.96 | 18.81  | 40.16  | 26.00 | 66.04 | 24.625              | 17.5   | 10.2                  | 150                | 68.2  |
| FCP2-SB | 24.0   | 60.96 | 32.81  | 83.34  | 26.00 | 66.04 | 24.625              | 31.5   | 16.2                  | 160                | 72.3  |
| FCP3-SB | 24.0   | 60.96 | 46.81  | 118.90 | 26.00 | 66.04 | 24.625              | 45.5   | 22.1                  | 175                | 90.9  |
| FCP4-SB | 24.0   | 60.96 | 60.81  | 154.46 | 26.00 | 66.04 | 24.625              | 59.5   | 28.1                  | 200                | 113.6 |
| FCP5-SB | 24.0   | 60.96 | 74.81  | 215.42 | 26.00 | 66.04 | 24.625              | 73.5   | 34.0                  | 230                | 138.6 |
| FCP6-SB | 24.0   | 60.96 | 88.81  | 241.75 | 26.00 | 66.04 | 24.625              | 87.5   | 40.0                  | 280                | 159.1 |



Duke Manufacturing Co.

2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

www.dukemfg.com