

BRIO

GELATO | ICE CREAM

gti **DESIGNS**

Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Display Case

Standard Features:

- Great entry-level display for gelato, ice cream, sorbetto, etc.
- Sizes available for 6, 7, or 9, five liter pans
- Thermo-pane, anti-condensation glass
- Ventilated with automatic defrosting
- Self-contained - with condensation pan (no floor drain required)
- Electronic control panel
- Plexi rear sliding doors
- LED lighting to enhance presentation
- Stainless steel interior
- White exterior, RAL 9003
- Adjustable equipment legs and heavy duty casters
- Plug & cord (6ft cord)



Optional Accessories:



- Paint exterior panels, customer choice of RAL color
- 10" Dipper well and kit




GELATO/ ICE CREAM DISPLAY CASE



Front & Rear View

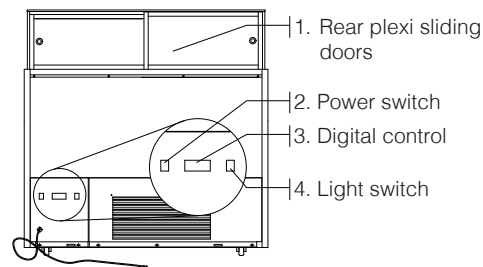

SIZE: 14" x 6.5" x 4.5"h



Technical Specifications & Electrical Requirements

Model #	Dimensions W x D x H (In.)	# of Pans (5 Lt.)	Net Wt. (Lbs.)	Amps.	HP	Nema Plug
BRIO-6FG	49.4" x 27.8" x 50"	6	297	10	1	6-15P
BRIO-7FG	56.3" x 27.8" x 50"	7	352	12	1	6-15P
BRIO-9FG	70.2" x 27.8" x 50"	9	440	14	1	6-15P



Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
Tile floors, low ceilings, or small rooms will increase noise level.
Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.