



REFRIGERATED PREP TABLES SELF-CONTAINED PT MAX


ITEM # _____

QTY. _____

PROJECT:

CONSULTANT:

33"S DEEP UNITS

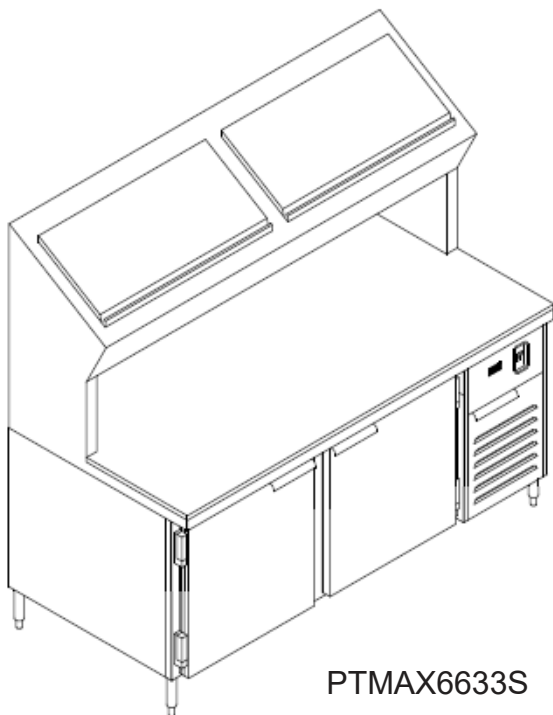

PTMAX6633S

CONSTRUCTION FEATURES

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT SIDE, TURN DOWN ENDS. TOP HAS MECHANICALLY COOLED REFRIGERATED RAISED RAIL AT REAR WITH OPENINGS TO ACCOMMODATE STANDARD PANS. (PANS NOT INCLUDED)
- **RAIL/COLD WALL** - ALL STAINLESS CONSTRUCTION WITH BUILT IN 2-1/2" RECESSED LEDGE, EXPANSION VALVE, SOLENOID VALVE, THERMOSTAT AND DRAIN VALVE. STAINLESS HINGED COVER PROVIDED OVER THE OPENINGS. ON/OFF DEFROST SWITCH PROVIDED. TEMPERATURE IN RAIL IS MAINTAINED TO MEET NSF-7 REQUIREMENT.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS ARE FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DOORS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DOORS ARE SELF CLOSING AND USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - ALL REFRIGERATORS USE R-448A REFRIGERANT COMPRESSOR WITH HOT GAS CONDENSATE EVAPORATOR IS MOUNTED AT RIGHT END. EVAPORATOR BLOWER IS INSTALLED WITH EXPANSION VALVE AND SOLENOID VALVE. THERMOSTAT IS MOUNTED IN APRON. REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **ELECTRICAL CONNECTION** - 115 VOLTS, 60 CYCLE, SINGLE PHASE. ALL UNITS PROVIDED WITH 6'-0" CORD AND PLUG-NEMA 5-15P.

OPTIONS AND ACCESSORIES

- | | | |
|--|--|---|
| ☐ 1/2" THICK POLY CUTTING BOARD | ☐ DIAL THERMOMETER | ☐ 50 CYCLE FOR SPECIAL APPLICATION |
| ☐ 1/2" THICK RICHLITE CUTTING BOARD | ☐ PAN SLIDES (ON 24" DOORS ONLY) | ☐ SPECIAL BODY HEIGHT |
| ☐ STAINLESS STEEL BACK | ☐ FULL LENGTH RECESSED HANDLES | ☐ CYLINDER LOCKS |
| ☐ LEFT SIDE MECHANICAL COMP. | ☐ COATED BLOWER COIL | ☐ FLANGED FEET |
| ☐ 5" DIAMETER POLY CASTERS | ☐ 6" DEEP SINK OVER COMP. HOUSING | ☐ S/S KICK PLATES |
| ☐ PLASTIC LAMINATE FRONT | ☐ 208 VOLT SINGLE PHASE | ☐ S/S CHANNEL BASE |
| ☐ PLASTIC LAMINATE LEFT END | ☐ 208 VOLT THREE PHASE | |
| ☐ PLASTIC LAMINATE RIGHT END | | |
| ☐ PLASTIC LAMINATE REAR | | ☐ OTHER: _____ |

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-1-1**




REFRIGERATED PREP TABLES SELF-CONTAINED PT MAX

ITEM # _____


QTY. _____

PROJECT: _____

CONSULTANT: _____

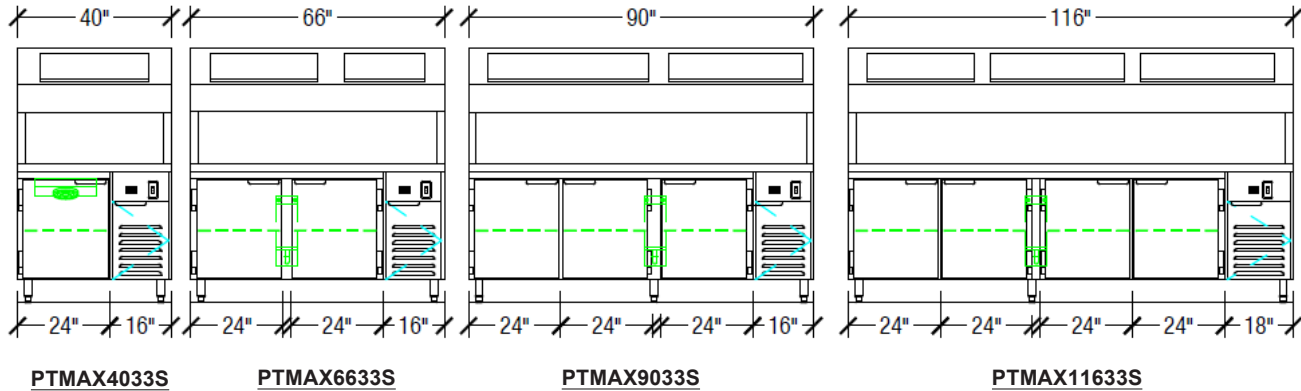

SPECIFICATION DATA							
MODEL	DOORS	1/6 PAN, RAIL CAPACITY	CUBIC FEET	COMP. HP	VOLTAGE	AMPS	CRATED WEIGHT
PTMAX4033S	1 - 24"	8	6.6	1/4	115/60/1	6.8	270
PTMAX6633S	2 - 24"	14	14.6	1/3	115/60/1	8.8	430
PTMAX9033S	3 - 24"	22	22.6	1/2	115/60/1	11.6	585
PTMAX11633S	4 - 24"	28	30.6	5/8	115/60/1	12.9	700

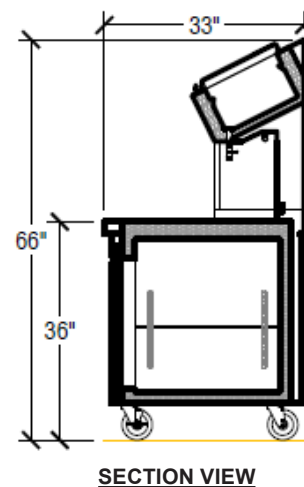

MECHANICAL DATA

LEGEND




CONDENSING UNIT WIRED TO
JUNCTION BOX/HARNESS

JB

JUNCTION BOX/HARNESS WITH 6'-0"
CORD AND PLUG (NEMA 5-15P)

S

ON - OFF SWITCH FOR PAN RAIL



SECTION VIEW



EMI is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-1-2**