



SPEC SHEET

KoolMore 48 in. Commercial Warming Shelf

SKU: KM-WS48

FEATURES

- Top Capacity: Can hold up to 55 lbs., perfect for accommodating various dish sizes. Whether you need to keep multiple small dishes warm or one large platter, this warming shelf has you covered.
- Temperature Range: Adjustable from 80°F to 212°F, suitable for keeping a variety of foods warm. This wide temperature range ensures that you can keep different types of food at their ideal serving temperatures.
- Construction: Made from durable 304 stainless steel, resistant to corrosion and wear. This high-quality material ensures that the warming shelf will last for years, even with frequent use in a busy kitchen.
- Design Elements: Includes adjustable rubber feet for stability and a marine edge to prevent spills. The rubber feet keep the warming shelf steady on any surface, while the marine edge helps contain any accidental spills, making cleanup a breeze.
- Certifications: UL listed for safety and NSF for Sanitation, ensuring top-tier reliability and compliance with industry standards. You can trust this warming shelf to meet all your kitchen's safety and hygiene requirements.
- Plug Type: Equipped with a NEMA 5-15P plug and a 4.59 ft power cord for convenient setup. The long power cord allows for flexible placement within your kitchen, ensuring it fits seamlessly into your workflow.
- Power Specifications: Operates at 6.4 amps, 60 Hz, 120 volts, and 768 watts for efficient performance. These specifications ensure that the warming shelf heats up quickly and maintains a consistent temperature.



CLOSE UP IMAGES



TECHNICAL SPECS

Dimensions

Length	49
Width	20
Height	3
Weight Lbs	33.1
Power Cord Length	55

Capacity

Top Capacity	55 lbs.
--------------	---------


Features & Material

Temperature Range	80-212 F
Number Of Temperature Zones	1
Hot Surface Indicator Lights	No
Control Type	Mechanical, Infinite
Color Finish	Stainless-Steel
Warming Time After Unplugging Min	20
Exterior Material	Stainless-Steel 304
Feet Material	Rubber

Electric Data & Certifications

Amps	6.4
Hertz	60
Phase	1
Voltage	120
Wattage	768
Plug Type	NEMA 5-15P
Certifications	UL listed for Safety and NSF for Sanitation

Plan View

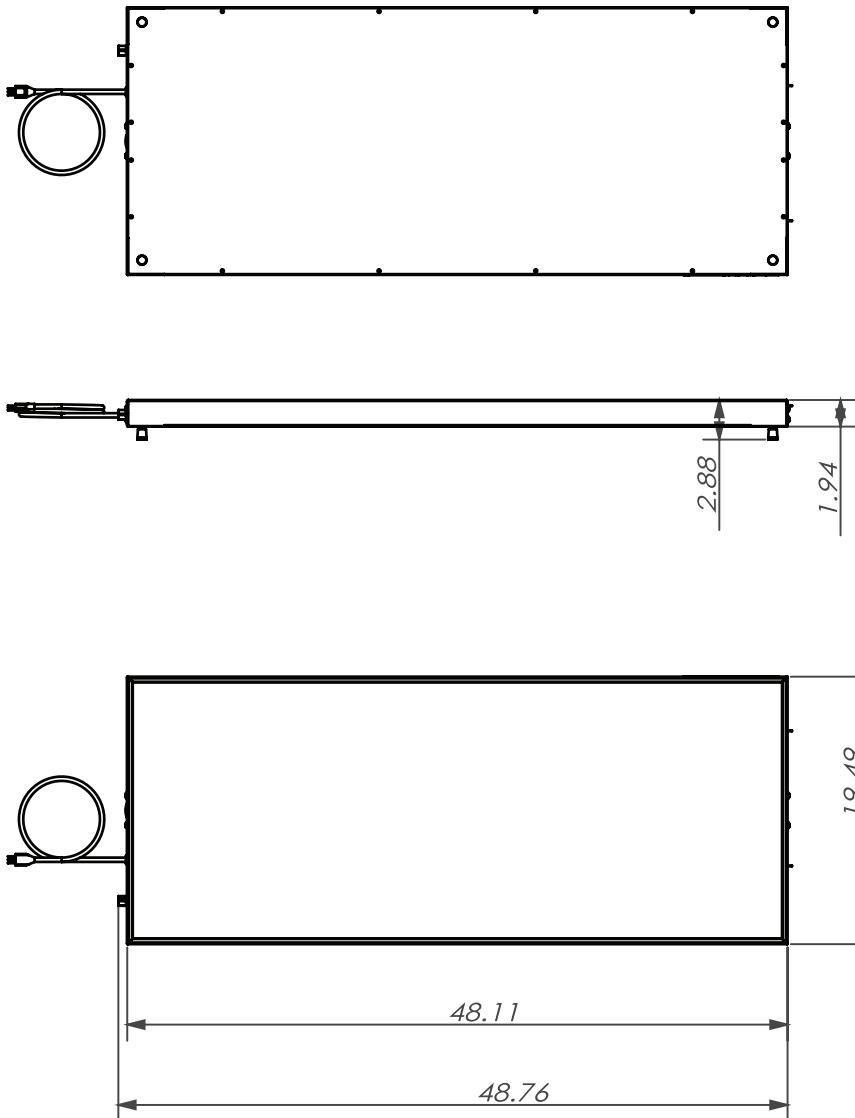

CERTIFICATIONS



706 Eastern Parkway STE 1G, Brooklyn NY 11213
718-576-6342
info@koolmore.com