

Experience a level of quality that is Italian-inspired, but manufactured for the needs of North American restaurants. Marra Forni brick ovens combine traditional artisanal workmanship, such as a full refractory brick enclosure for outstanding performance, with modern manufacturing technology and design innovation. Each oven is hand-made, brick-by-brick, using the same time-proven techniques that masons have used for generations. As functional art for the front of the house, or built into a wall or other structure for ease of cleaning, each oven is completely customizable for specific needs and decors.

Each model features our unique Marra Stone® stone-hearth cooking surface as its heart. This proprietary refractory brick surface includes volcanic material, for outstanding cooking results as well as constant temperatures for consistency. Insulated construction allows heat to be absorbed and retained in the oven cavity for improved efficiency. The oven is operated by a MarraSmart® fully-programmable digital touchscreen controller to maximize thermal control for ideal baking results, over an extended temperature range between 200-950°F (93-510°C).

Marra Forni Enclosed Facade series ovens are designed to be built directly into a wall or other enclosure, for a flush and seamless appearance. Combined with our standard traditional brick oven interior, this provides a unique oven solution, offering all of the performance advantages of our traditional Neapolitan ovens with a fully wall-integrated front-of-house appearance. These ovens are approved and certified "VPN" (Vero Pizza Napoletana), proudly showing their adherence to strict internationally-recognized standards governing oven construction and suitability for the Neapolitan-style pizza cooking process. Gas primary heat provides efficiency, while wood auxiliary heat imparts traditional flavor profiles and enhances cooking adjustability.

Standard Features

- Approved and certified "VPN" (Vero Pizza Napoletana) for adherence to traditional construction and pizza baking techniques pioneered in Naples, Italy
- MarraStone® stone hearth deck is of a refractory brick that includes volcanic material. This deck is both durable and highly porous, and is capable of maintaining cooking temperatures from 200-950°F (93-510°C) for consistent high-volume production
- MarraSmart® digital touch screen control technology is fully programmable and provides complete control of oven cooking conditions, as well as automatic timed on/off with menu selection and QR code scanning for maintenance videos
- Enclosed facade design permits installation directly into a wall for a flush appearance
- Superior cooking performance and recovery based upon natural convective airflow within the oven chamber, and the heat retention of custom formulated refractory bricks
- Combined forced-air gas and wood-burning heating provides efficiency as well as preserving traditional wood-fired cooking flavors
- Integrated "eyebrow" exhaust duct at the loading/unloading entrance is integrated into the structure of the oven dome, greatly reducing emissions into the room while enhancing staff visibility of oven interior
- Single gas burner (second burner optional, for single please specify left or right side)
- 1-1/4" (32mm)-thick black granite ledge
- Removable front door
- Painted matte black steel front facade
- Heavy duty black powder-coated steel stand
- Unfinished cement dome exterior
- Manufactured in the U.S.A.

Cooking Capacity (typical)

8" (200mm) pizzas: 14

10" (250mm) pizzas: 12

12" (300mm) pizzas: 10

16" (400mm) pizzas: 6

Production capacity varies depending upon type of food product being cooked, food preparation and set temperature.

Total Cooking Surface 16.57 sq. ft. (1.54 sq. m)

Cooking Deck Diameter 55-1/8" (1400mm)



ENCLOSED FACADE Series

Wood/Gas-Fired Oven, Brick, with Enclosed Facade

EF140WG



Configuration Options (Check all that apply)

Fuel Type



Wood-Fired
 Natural Gas
 Liquid Propane Gas
 Burner Placement Options
 Left
 Right

Options



Direct Ventilation (quoted separately)
 Exhaust Fan with Variable Speed Fan Control
 Integrated Fan Interlock
 Second Gas Burner
 Gas Regulator (1 required per burner)
 4' (1219mm) Quick Disconnect Hose (1 required per burner)
 Stainless Steel Facade
 Stainless Steel Stand
 Shelf Delete (for improved burner access)
 Interior Light Box
 Painted Exterior (instead of standard unfinished exterior)
 Base Enclosure (Side Panels)
 Base Enclosure (Full Skirt Enclosure)
 Base Trim Kit

Accessories

Dough Tray
 Dough Tray Lid(s)
 Dough Tray Dolly
 Standard Peel Tool Kit
 Deluxe Peel Tool Kit
 Wall Mounted Tool Rack

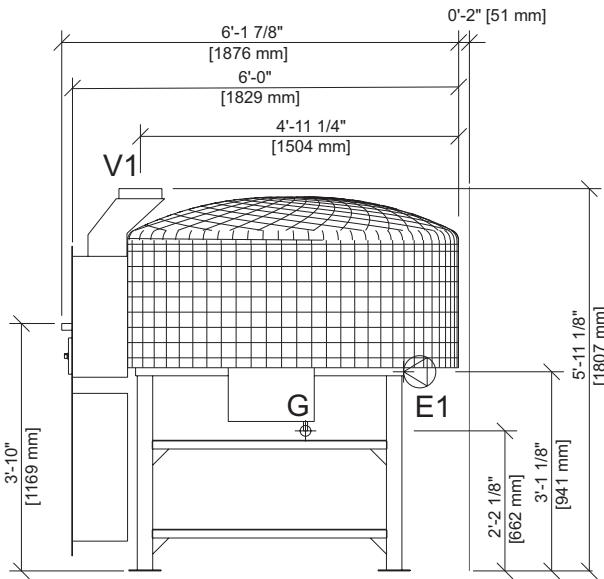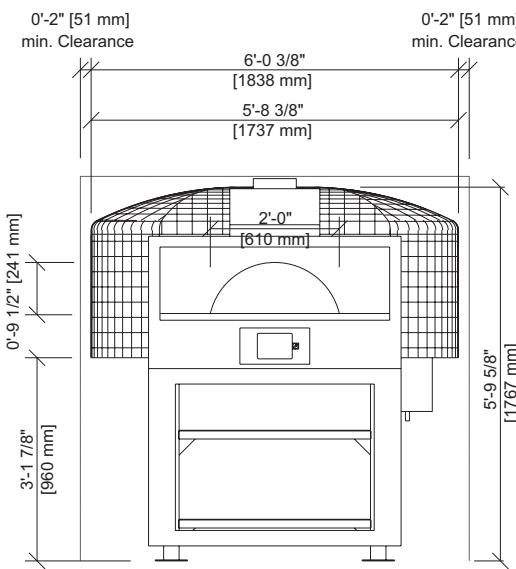

Wall penetration details [not to scale]. Wall construction and oven installation must comply with all applicable codes.

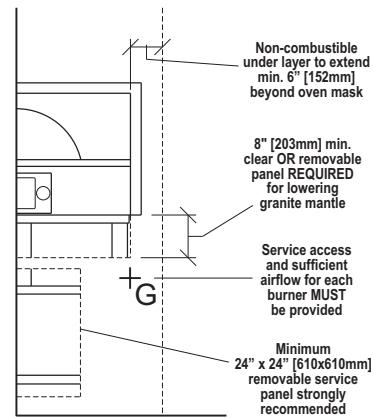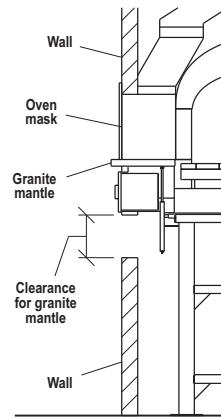

SIDE VIEW

FRONT VIEW

V **Ventilation connection**
8" (203mm) dia.

G **Gas connection (2)**
3/4" NPT. Gas-suitable flex hose with quick disconnect required (supplied by others)



Electrical connection

9' (2.74m) flexible cord with NEMA 5-15P plug provided

Solid fuel loading (through front door)

Wood

Volume and wood type is dependent on desired flavor profile and baking temperature

For utility loads and connection details, refer to Page 3 of this spec sheet.

All specifications are subject to change without notice, based on Marra Forni's commitment to ongoing product development and improvement measures. Ovens are designed only for the cooking of manufacturer-approved food products in commercial and institutional settings, and should not be used for any other purpose.

ENCLOSED FACADE Series

EF140WG



Electrical Connection Requirements

Electrical supply	Peak load ampacity	Min. supply ampacity	Max. breaker/ disconnect	Plug	Cord
110V 50/60 Hz, 1 Ph	12A	15A	15A	NEMA 5-15P	4' (1.22m)

9' (2.74m) flexible cord with plug provided. Use of a GFCI (ground fault connection interruptor) outlet is not recommended for this appliance. Electronic burner ignition systems may frequently engage such a device and/or suffer from ignition failure as a result. If a GFCI outlet must be used, please consult with the factory for assistance.

Ventilation Connection Requirements

Connection	Volume	Static Pressure
8" (203mm) round collar	150 CFM 255 m ³ /h	0.01" W.C. 2.5 Pa

Oven may be installed with an approved direct vent system, or an approved Type 1 exhaust hood system. Ventilation system must comply with all applicable local and national codes.

If direct ventilation is desired, a Marra Forni-designed optional vent system is available as an option and is strongly recommended. This option also requires the exhaust fan (with variable speed fan control) option.

If not using a Marra Forni-supplied direct ventilation connection, determining correct ventilation and code compliance is the responsibility of others.

Gas Connection Requirements

Maximum (per burner)	Minimum (per burner)	Avg./burner over 10 hr. duty cycle (Optional gas regulator reqd.)	Natural gas	Propane	
145,000 BTU 42.5 kW	70,000 BTU 20.5 kW	84,000 BTU 24.6 kW	Supply connection (1 reqd. per burner) Orifice diameter Air shutter gap Gas inlet supply pressure Input manifold pressure Output man. pressure, low fire Output man. pressure, high fire	3/4" NPT 0.173" 1/4" (6.4mm) 10-14" W.C. (2.5-3.5 kPa) 10" W.C. (2.5 kPa) 1.8" W.C. (0.5 kPa) 5.8" W.C. (1.4 kPa)	3/4" NPT 0.125" 3/8" (9.5mm) 10-14" W.C. (2.5-3.5 kPa) 10" W.C. (2.5 kPa) 1.5" W.C. (0.4 kPa) 5.2" W.C. (1.3 kPa)

Supply via one (1) gas-suitable flex hose per connection, with 3/4" NPT connection and quick disconnects (hoses and disconnects supplied by others). Each burner (if more than one [1]) should be treated as a separate appliance for purposes including gas supply requirements, presence of flow regulators, heat load calculations for the room, and makeup air.

Dimensional Information

- Minimum clearance: 2" (51mm) on all sides and rear from combustible surfaces, 0" (0mm) from non-combustible surfaces, 18" (450mm) side clearance recommended for service access
- Exterior: (H x W x D): 71-1/8" x 68-3/8" x 75-7/8" (1807 x 1737 x 1927mm)
- Shipping: (H x W x D): 82" x 96" x 83" (2083 x 2438 x 2108mm)
- Weight: 4,200 lbs. (1905 kg)
- Crated Weight: 4,600 lbs. (2087 kg)
- Freight Class: 77.5, shipped LTL

Specification

EF140WG Item # _____

Unit will be an ETL-listed Marra Forni EF140WG freestanding, wood and gas heated brick oven, intended for cooking and baking pizza and other approved food products.

Operating voltage will be 110V, 50/60 Hz, 1 Ph.

Unit heating will be provided by forced-air gas burners and wood burning.

Unit will feature a stone hearth cooking deck composed of a refractory brick composition, including volcanic material, to provide and maintain cooking temperatures up to 950°F (510°C).

Unit will feature an enclosed facade design for a flush wall installation.

Unit will feature a programmable electronic controller with selectable menus to accommodate a variety of cooking requirements, automatic timed on/off features, and display of QR codes to access documentation including service and maintenance videos.

Unit cooking area will measure 55-1/8" (1400mm) in diameter. Door opening will measure 24" (610mm) in width and 9-1/2" (241mm) in height.

Unit will feature a brick interior for superior heat retention and distribution within the cooking chamber.

Unit will feature an unfinished cement dome exterior.

Unit will include a removable front door.

Unit will include an oven mantle featuring a 1-1/4" (32mm)-thick black granite ledge.

Unit will include a black powder-coated steel stand and painted matte black steel front facade.

Unit will be approved and certified "VPN" (Vero Pizza Napoletana) for adherence to internationally-recognized standards governing oven construction and suitability for the traditional Neapolitan-style pizza cooking process.

Unit will be manufactured in the U.S.A. and comply with all applicable FTC requirements for this status.