
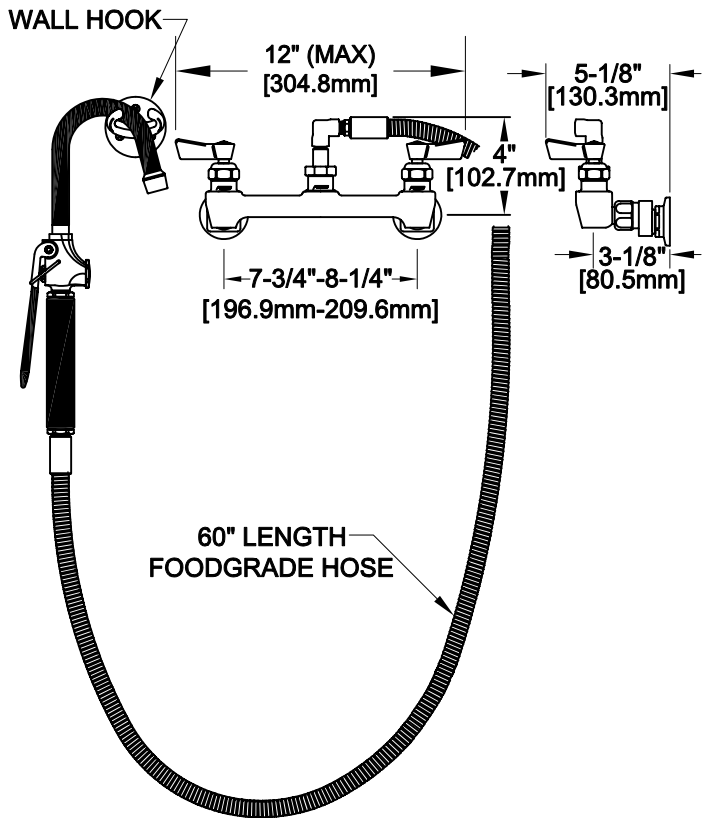


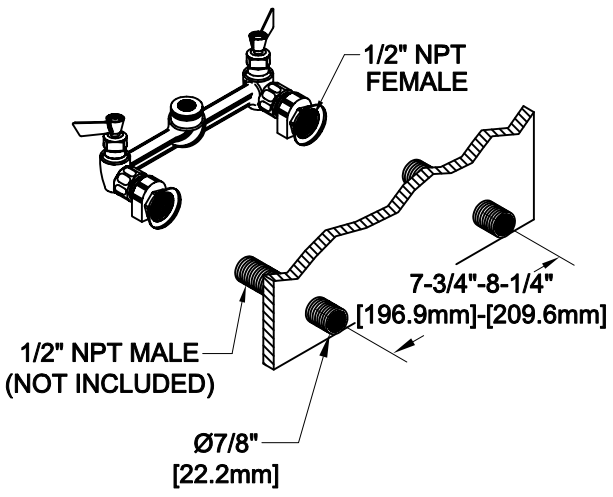

APPLICATION:		PRODUCT NAME: POT FILLER HOSE STYLE 8" C/C ADJUSTABLE WALL MOUNT	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: <input type="checkbox"/> 2250	
 <p>WALL HOOK</p> <p>12" (MAX) [304.8mm]</p> <p>5-1/8" [130.3mm]</p> <p>4" [102.7mm]</p> <p>7-3/4"-8-1/4" [196.9mm-209.6mm]</p> <p>3-1/8" [80.5mm]</p> <p>60" LENGTH FOODGRADE HOSE</p>		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH <input type="checkbox"/> BACKFLOW PREVENTER <input type="checkbox"/> PIPE HOOK <input type="checkbox"/> NIPPLES <input type="checkbox"/> ELBOWS <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> OTHER _____	
		FEATURES: <b>CONTROL VALVE</b> * 8" C/C ADJUSTABLE WALL MOUNT * ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4" * INTERNAL SPRING LOADED CHECK VALVES * SWIVELING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS <b>HOSE</b> * 60" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE <b>POT FILLER VALVE</b> * NON SCRATCHING/ MARRING TUBE * 5.00 GPM AT 80 PSI * AERATED STREAM <b>SWIVEL ELBOW</b> * 360° TURNING RADIUS <b>SYSTEM LIMITS</b> * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC <b>SHIPPING WEIGHT</b> * 9.0 LBS	
ROUGH-IN:  <p>1/2" NPT FEMALE</p> <p>7-3/4"-8-1/4" [196.9mm]-[209.6mm]</p> <p>1/2" NPT MALE (NOT INCLUDED)</p> <p>Ø7/8" [22.2mm]</p>		 <p>FISHER MANUFACTURING COMPANY          TOLL FREE: 800-421-6162 - FAX: 800-832-8238          information@fisher-mfg.com - www.fisher-mfg.com</p>	
 ANSI/A112.18.1M			