GARLAND

Cuisine Series Heavy Duty Even-Heat Hot Top Range

Project	
Item	
Quantity	
CSI Section 11400	
Approved	
Date	

Models

- C36-8R
- C36-8S
- C36-8C
- C36-8M



Model C36-8R Range with Three 12" Even-Heat Hot Tops

Standard Features

- Three 25,000 BTU/h (NG) even-heat hot tops
- · Stainless steel front and sides
- · Stainless steel front rail · Stainless steel burner box
- 1-1/4" NPT front gas manifold
- · Can be installed individually or in
- a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- · Porcelain oven interior
- R model 4 rack positions C model - 3 rack positions
- R model 1 chrome plated rack C model - 3 chrome plated racks
- · Fully insulated oven interior
- · Safety oven pilot
- Oven thermostat control: 150°-500°F (66°- 260°C) (R/C)
- · Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- · Stainless steel oven interior in lieu of porcelain oven interior - NC
- · Single or double deck high shelf or back riser
- Full-height stand for modular base with legs or casters
- · Stainless steel intermediate shelf for cabinet base
- · Stainless steel door(s) for cabinet base units
- · Stainless steel back
- · Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" NPT (Specify)
- Rear gas connection: 3/4", 1", 1 1/4" NPT (Specify)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- · Extra oven rack
- Extension for 1/9 pans

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range _ with total BTU/h rating Series. Model _ __when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Stainless steel oven interior with a heavy- duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

Even-Heat Hot Tops - 12" (305mm) Section. 25,000 BTU/h each burner with one per plate.

NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against

NOTE: Ranges supplied with casters must be installed with an approved restraining device.










GARLAND°

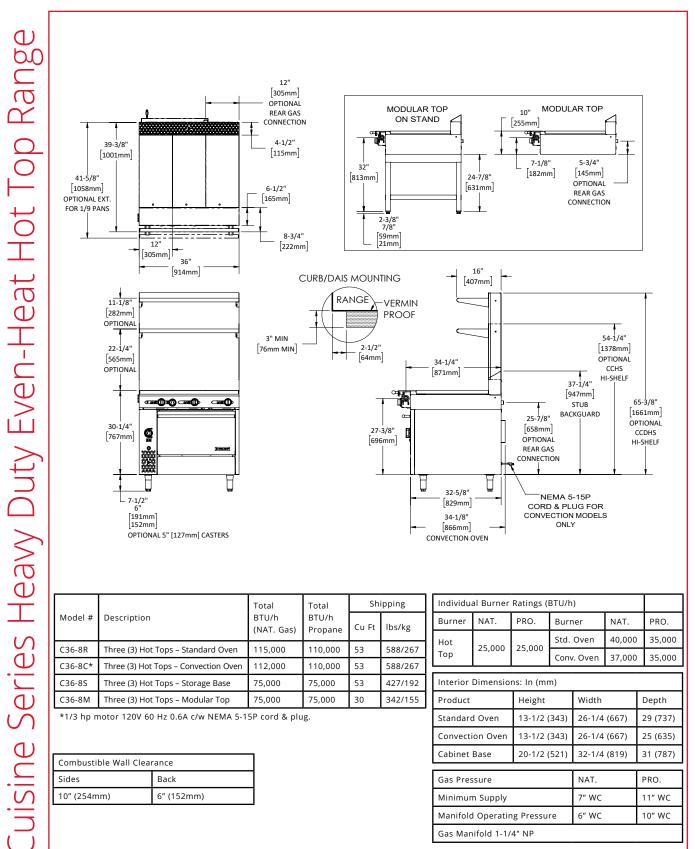

Model #	Description	Total BTU/h (NAT. Gas)	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C36-8R	Three (3) Hot Tops – Standard Oven	115,000	110,000	53	588/267
C36-8C*	Three (3) Hot Tops – Convection Oven	112,000	110,000	53	588/267
C36-8S	Three (3) Hot Tops – Storage Base	75,000	75,000	53	427/192
C36-8M	Three (3) Hot Tops – Modular Top	75,000	75,000	30	342/155

^{*1/3} hp motor 120V 60 Hz 0.6A c/w NEMA 5-15P cord & plug.

Combustible Wall Clearance		
Sides	Back	
10" (254mm)	6" (152mm)	

Individual Burner Ratings (BTU/h)					
Burner	NAT.	PRO.	Burner	NAT.	PRO.
Hot Top	25,000 25,000	25,000	Std. Oven	40,000	35,000
			Conv. Oven	37,000	35,000
		Conv. Oven	37,000	35,000	

Interior Dimensions: In (mm)					
Product	Height	Width	Depth		
Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)		
Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)		
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)		

Gas Pressure	NAT.	PRO.
Minimum Supply	7" WC	11" WC
Manifold Operating Pressure	6" WC	10" WC
Gas Manifold 1-1/4" NP		

Garland reserves the right to make changes to the design or specifications without prior notice.

