

REFRIGERATOR MANUFACTURER Turbo air more durable, efficient, beautiful	4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com		Project:
			Model #:
			Item #:
	Available W/H:	Qty:	
	Approval:		
	AIA #:	SIS #:	
			CSI Section 11400

Pass Thru Solid Door Heated Cabinet - Universal Tray Slide Reach-In M3 Series

FEATURES & BENEFITS

■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarm beeps when doors are not sealed
- Digital display allows for easy monitoring

■ Ducted fan air distribution system

Maintains temperature within the food zone

■ On/Off switch

ON/OFF switch is located on control panel



■ Stainless steel cabinet construction

The Turbo Air M3 heated cabinet model boasts a stainless steel exterior (galvanized steel top, bottom and back) and interior. It guarantees the utmost in cleanliness and long product life. Sharp corners and edges have been rounded to reduce the risk of injury. The M3 adds a touch of style to the most refined setting.

■ LED interior lighting

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ Stainless steel universal tray slides standard

Each tray slide accommodates up to 6" deep full size pan or 18" x 26" size pan or 14" x 18" size pans or 12" x 20" size pans.

■ Heated cabinet holds 140°F ~ 180°F for the best in food preservation



Model	Swing Doors	CU./FT.	#of Tray slides (pairs)	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D x H [†] (inches)
M3H47-2-PT-TS	4	42.9	10	1550	13.5	345	51 3/4 x 33 1/8 x 78

Pass Thru Solid Door Heated Cabinet - Universal Tray Slide

Reach-In
M3 Series

Model : M3H47-2-PT-TS

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	13.5
Wattage (W)	1550
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	4
# of Racks Accepted	2
Net Capacity (cu. ft.)	42.9
Ext. Length Overall (in.)	51 3/4 (1315mm)
Ext. Depth Overall (in.)	33 1/8 (840mm)
Ext. Height Overall (in.)†	78 (1981mm)
Int. Length Overall (in.)	45 1/4 (1151mm)
Int. Depth Overall (in.)	25 1/8 (639mm)
Int. Height Overall (in.)	58 3/4 (1493mm)
# of Tray slides (pairs)	10
Net Weight (lbs.)	282
Gross Weight (lbs.)	345

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door locks
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional universal tray slides (1 pair): T24H139080

PLAN VIEW

(unit : inch)

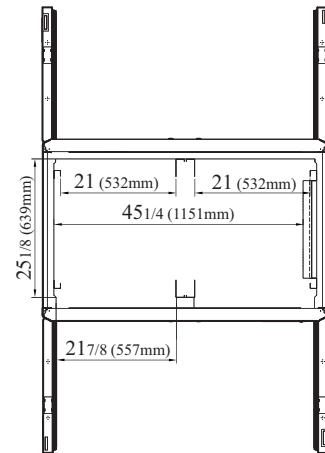


TOP VIEW

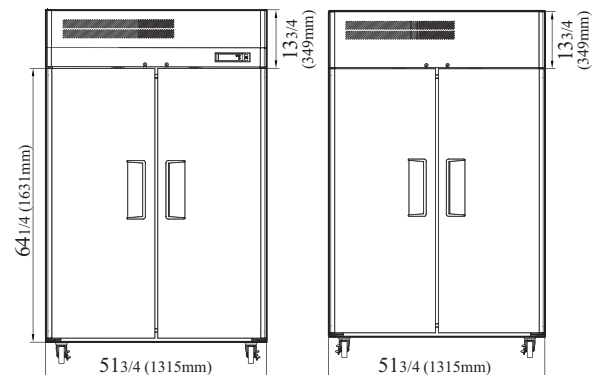

FRONT VIEW

BACK VIEW

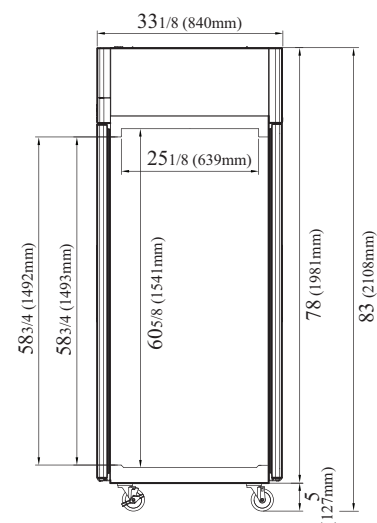

SIDE VIEW

Ver.20250806



- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002