



## Rotary Gas-Fired Oven Cupola Dome Basic - CB FGR130 Morello Forni



### STANDARD FEATURES

- Gas Cupola Basic Dome Oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials.
- INTELTOUCH-MF10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency Stop push button.
- 220/60/1

### OPTION

Custom Colors RAL

ITEM:

PROJECT:

DATE:




Rotary Gas-Fired Oven  
Cupola Dome Basic - CB  
FGR130



# Rosita Bisani

## SPECIALTY FOOD SERVICES EQUIPMENT

# Rotary Gas-Fired Oven Cupola Dome Basic - CB FGR130 Morello Forni

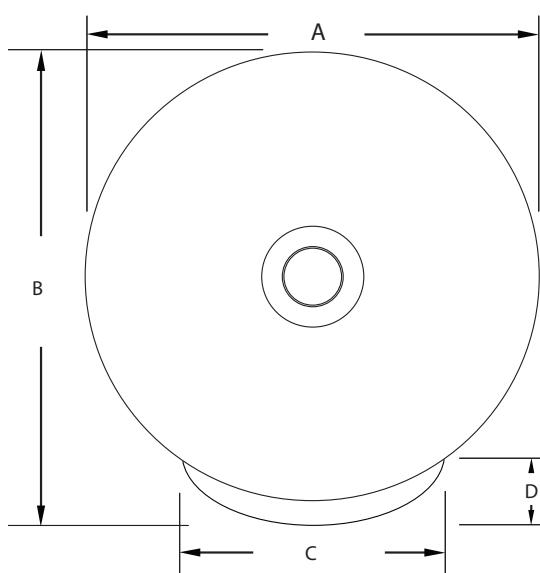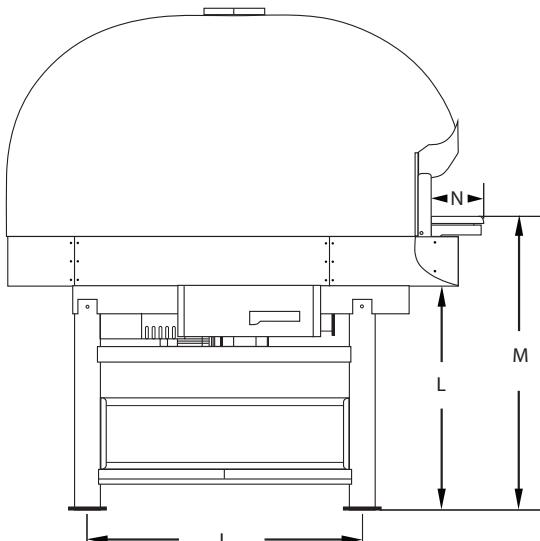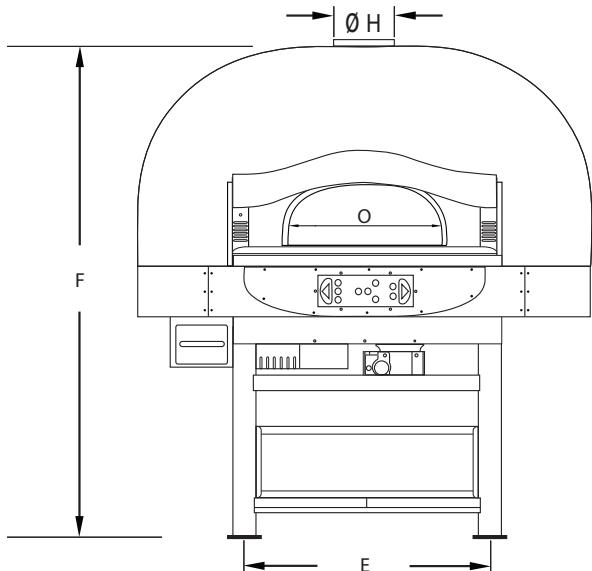

## FLUE CONNECTION

**FLUE CONNECTION**  
All ovens are provided with an exhaust flue collar  $\frac{1}{2}$ " or  $\frac{3}{4}$ " in height and 8" or 10" nominal diameter depending on model. The flue collar ( $\varnothing H$ ) is located on oven top to provide a secure connection to the chimney. The oven flue collar is designed to be connected to chimney listed to UL-103HT. When working on gas only ovens, the oven is suitable for connection to Type B Gas Vent when used with the draft hood. When burning wood, an independent flue evacuation system is required.

## ELECTRICAL CONNECTION

#### **ELECTRICAL CONNECTION**

## AIR SUPPLY

**AIR SUPPLY**  
These ovens require make-up air to replace combustion air and excess air taken out by the flue. Always check for adequate openings to allow required make-up air flow in. Check table included in operations manual.

Model/ Specifications	FGR130 (51)	Cooking Time	
Power	220/60/1	Capacity	(10) x 11"
Gas Fitting (inches)	3/4	Individual Pizza	2 ~ 3 minutes
BTU	136,000	Pan Pizza	4 ~ 6 minutes
Weight (lbs.)	5,291		

Model/ Dimension (inches)	A	B	C	D	E	F	ØH	I	L	M	N	O
FGR-130 (51)	75	79	44	12	41	81	10	45.5	32.5	48	10	25.5



**Rosito Bisani Imports, Inc.**  
940 South La Brea Avenue, Los Angeles CA, 90036  
Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444  
E-mail: [sales@rosito-bisani.com](mailto:sales@rosito-bisani.com)  
**[www.rosito-bisani.com](http://www.rosito-bisani.com)**

530 South Henderson Road, Suite F, King of Prussia PA, 19406  
Tel: 610-265-5950 • Fax: 888-576-8524

The logo consists of the letters 'UL' in a bold, sans-serif font, enclosed within a thick circular border. A registered trademark symbol (®) is located at the bottom of the 'L'.

*Rosito and Bisani Imports reserve the right to make changes in design specifications and/or to make additional improvements in its products without imposing any obligations upon itself to install them on products previously manufactured. © 2013.*